

Lee County

**City of Bishopville
Town of Lynchburg**

Hazard Mitigation Plan Update

August 2009

Prepared by:

Santee-Lynches Regional Council of Governments
36 West Liberty Street
Post Office Box 1837
Sumter, SC 29151

Outline of Lee County Hazard Mitigation Plan

<u>Sections</u>	<u>Page Numbers</u>
8-1 Hazard Identification and Analysis.....	8-3
1-1 Potential Hazards.....	8-3
A. Flooding.....	8-4
B. Hurricane & Tropical Storms.....	8-6
C. Tornadoes.....	8-9
D. Severe Winter Storms.....	8-13
E. Dam Failures.....	8-14
F. Severe Thunderstorms, Wind Events, Hail, and Lightening.....	8-16
G. Wildfires.....	8-17
H. Earthquakes.....	8-19
I. Drought.....	8-23
1-2 Hazard Profile Risk Index.....	8-28
1-3 Conclusion on Hazard Risk.....	8-32
8-2 Critical Facilities Vulnerability.....	8-33
8-3 Mitigation Capability Assessment.....	8-34
8-4 Mitigation Strategy – Goals, Objectives, and Action Plan.....	8-40
8-4-1 Lee County.....	8-43
8-4-2 City of Bishopville.....	8-48
8-4-3 Town of Lynchburg.....	8-53
8-5 List of Critical Facilities.....	8-54

Lee County Hazard Risk Maps

Map 1	Flood Frequency 1975 – 1992 Compared to other SC Counties
Map 2	Flood Prone Areas
Map 3	Hurricane Tracks
Map 4	Historic Tornado Occurrences
Map 5	Winter Storms 1950 - 2008 Compared to other SC Counties
Map 6	Wind Storms 1950 -2008 Compared to other SC Counties
Map 7	Hail Storms 1950 - 2008 Compared to other SC Counties
Map 8	Lightning Storms 1993 - 2008 Frequency Compared to other SC Counties
Map 9	Wildfires 1988 - 2008 Compared to other SC Counties
Map 10	Earthquake Occurrences
Map 11	Drought Frequency Compared to other SC Counties
Map 12	Social Vulnerability
Map 13	Tornado Vulnerability
Map 14	Earthquake Vulnerability
Map 15	Composite Hazard Zones
Map 16	Final Place Vulnerability
Map 17	Critical Facilities Map
Map 18	Special Needs Population
Map 19	Critical Infrastructure – Transportation Systems
Map 20	Critical Infrastructure Maps – Electric Power Utilities
Map 21	Critical Infrastructure – Water Utilities
Map 22	Critical Infrastructure – Wastewater Utilities

SECTION 8-1 HAZARD IDENTIFICATION AND ANALYSIS

INTRODUCTION

This section identifies, describes and analyzes the natural hazards present in Lee County that can threaten human life and damage property. It is broken down into the following three sections:

1. Potential Hazards (includes descriptions, historical occurrences, and map attachments)
2. Hazard Profile Risk Index
3. Conclusions on Hazard Risk

1. POTENTIAL HAZARDS

Due to its geographical setting, Lee County is vulnerable to a wide array of natural hazards that threaten life and property. **Shown in Table A-1 below are the potential hazards that could impact the local jurisdictions in Lee County.**

**Table A-1
Hazard Identification and Assessment
Jurisdiction Affected by Hazard Type
Clarendon County and Local Governmental Units**

Local Government	Flooding	Hurricane or Tropical or Coastal Storm	Tornado	Winter Storm/freezing /ice/snow	Dam Failure	Severe storm/wind/hail/lightning	Wildfire	Earthquake	Drought/Heat
Unincorporated Lee County	X	X	X	X	X	X	X	X	X
Town of Lynchburg	X	X	X	X	-	X	-	X	X
City of Bishopville	X	X	X	X	-	X	-	X	X

("X" indicates that the governmental entity could potentially experience the type hazard indicated)

Some of these hazards are interrelated (i.e., hurricanes can cause flooding and tornadoes), and some consist of hazardous elements that are not listed separately (i.e., severe thunderstorms can cause lightning). This section provides general descriptions for each of the above listed hazards along with their hazardous elements and provides information on historical hazard occurrences in Lee County. Historical records are used to help us identify the level of risk, with the methodological assumption that the data sources cited are reliable and accurate.

A. FLOODING

Description:

Flooding is the most frequent and costly natural hazard in the United States. Floods are generally the result of excessive precipitation, and can be classified under two categories: *flash floods*, the product of heavy localized precipitation in a short time period over a given location; and *general floods*, caused by precipitation over a longer time period and over a given river basin. The severity of a flooding event is determined by a combination of stream and river basin topography, precipitation and weather patterns, recent soil moisture conditions and the degree of vegetative clearing.

Flash flooding events usually occur within minutes or hours of heavy amounts of rainfall, from a dam or levee failure, or from a sudden release of water held by an ice jam. Most flash flooding is caused by slow-moving thunderstorms in a local area or by heavy rains associated with hurricanes and tropical storms. Although flash flooding occurs often along mountain streams, it is also common in urbanized areas where much of the ground is covered by impervious surfaces. General floods are usually longer-term events and may last for several days.

The primary types of general flooding include riverine flooding, coastal flooding and urban flooding. **Riverine flooding** is a function of excessive precipitation levels and water runoff volumes within the watershed of a stream or river. **Coastal flooding** is typically a result of storm surge, wind-driven waves, and heavy rainfall produced by hurricanes, tropical storms, nor'easters and other large coastal storms. **Urban flooding** occurs where man-made development has obstructed the natural flow of water and/or decreased the ability of natural groundcover to absorb and retain surface water runoff.

Periodic flooding of lands adjacent to rivers, streams and shorelines is a natural and inevitable occurrence that can be expected to take place based upon established recurrence intervals. The recurrence interval of a flood is defined as the average time interval, in years, expected between a flood event of a particular magnitude and an equal or larger flood. Flood magnitude increases with increasing recurrence interval.

A "floodplain" is the lowland area adjacent to a river, lake or ocean. Floodplains are designated by the frequency of the flood that is large enough to cover them. For example, the 10-year floodplain will be covered by the 10-year flood and the 100-year floodplain by the 100-year flood.

Flood frequencies, such as the "100-year flood," are determined by plotting a graph of the size of all known floods for an area and determining how often floods of a particular size occur. Another way of expressing the flood frequency is the chance of occurrence in a given year, which is the percentage of the probability of flooding each year. For example, the 100-year flood has a 1% chance of occurring in any given year.

Identification of floodplain areas within the county and the incorporated municipalities was based on the most recent Flood Insurance Rate Maps (FIRM) produced by FEMA. These maps display the locations of all of the major water bodies in the county and delineate the 100-year floodplain boundaries (Zone A). These are areas that have a one percent chance of equaling or exceeding the recorded base flood elevation during any year. Based on these maps the unincorporated areas of Lee County and the two incorporated municipalities have 100-year floodplains within their jurisdictions.

Digital (Q3) FEMA flood hazard maps are not available for any of the jurisdictions. If they become available they will be incorporated into future plan updates. In the absence of digital FEMA flood hazard maps, plan developers marked area maps or included copies of appropriate sections of FIRMS to further indicate the location of the flood hazard areas. These maps are included in the Appendix. In addition, FEMA Flood Insurance Rate Maps and Flood Hazard Boundary for Lee County (unincorporated areas only) and the City of Bishopville and the Town of Lynchburg are available at the office of the Santee Lynches Regional Council of Governments.

Table A-2
Lee County Flood Hazard Areas

Jurisdiction	FEMA Mapped Special Flood Hazard Area	NFIP Participant in Good Standing
Lee County (Unincorporated Areas Only)	Yes	Yes
City of Bishopville	Yes	Yes
Town of Lynchburg	Yes	Yes

Historical Occurrences:

Lee County has experienced relatively few flood events in the past. However, it does have some flood prone areas, particularly around the Lynches and Black River Basins. As for the two population centers, Bishopville and Lynchburg, they are not at any significant risk for floods.

According to historical flood data compiled by the National Climatic Data Center, there were 4 floods that occurred in Lee County from 1994-2009, which resulted in \$30,000 in property damage but no crop damage. Fortunately, Lee County did not experience any loss of life or injuries. Map 1 demonstrates how Lee County compares to other areas of South Carolina within this period of time. Map 2, on the other hand, illustrates those areas of the county that are prone to flooding. (Note: Map 3 was created by Santee-Lynches Regional Council of Governments using existing hydrograph and topography data obtained by the South Carolina Department of Natural Resources. It is meant to be used as a general location map of areas that are within a 100-year flood plain.)

Table A-3
Hazard Probability

	Events	Years	Recurrence Interval	% Chance/Year
100 Year Flood	*	*	100	1.00%
500 Year Flood	*	*	500	0.20%

Flood Occurrences in Lee County since 2002

Flash Flood on July 2, 2003 at 6:10 am – Sheriff reported cars stalled in water on Highway 14 on the north end of the county. The Lynches River overflowed several rural bridges closing the roads.

Flash Flood on August 2, 2004 at 4:15 pm – Sheriff reported flash flood on several rural roads closing them to through traffic.

Multi-jurisdictional Occurrences:

Lee

In Lee County, the areas most prone to floods are those in the vicinity of the Lynches River, the Black River, and Scape Ore Swamp.

Bishopville

The City of Bishopville is at risk of flood due to the tributaries of the Black River. The Mohawk residential neighborhood floods on a regular basis due to the inadequate drainage system.

As seen on **Map 2**, the City of Bishopville is within close proximity to a flood prone area, but the area within the jurisdiction is not at risk.

Lynchburg

Although Lynchburg is fairly close to the Lynches River, it is not at a significant risk for flooding.

Table A-4
Lee County
Multi-jurisdiction Analysis of Floods*

Jurisdictions	History	Vulnerability	Maximum Threat	Probability	Total Score	Jurisdiction Rating
Bishopville	20	50	100	35	205	1
Lynchburg	2	25	50	7	112	2
Unincorporated	10	25	10	35	80	3

Source: National Climatic Data Center

*See Appendix G for an explanation of the scoring system used for this table.

Those jurisdictions with the highest numerical scores should and will be receiving priority attention for planning and/or mitigation purposes.

B. HURRICANES & TROPICAL STORMS


Description:


Hurricanes and tropical storms, both classified as *tropical cyclones*, are low pressure storm systems that originate over warm ocean waters but are capable of causing immense destruction when crossing the coastline into land.

The primary damaging forces associated with these storms are high-level sustained winds, heavy precipitation and tornadoes. Coastal areas are also vulnerable to the additional forces of storm surge, wind-driven waves and tidal flooding. The key energy source for a tropical cyclone is the release of latent heat from the condensation of warm water. Their formation requires a low-pressure disturbance, sufficiently warm sea surface temperature, rotational force from the spinning of the earth and the absence of wind shear in the lowest 50,000 feet of the atmosphere.

Hurricanes and tropical storms can form in the Atlantic Ocean, Caribbean Sea and Gulf of Mexico from the months of June to November, but the peak of the Atlantic hurricane season is early to mid-September. The average number of storms that reach hurricane intensity per year in the Atlantic basin is about six.

As an incipient hurricane develops, barometric pressure at its center falls and **winds** increase. If the atmospheric and oceanic conditions are favorable, it can intensify into a tropical depression. When maximum sustained winds reach or exceed 39 miles per hour, the system is designated a tropical storm, given a name and closely monitored by the National Hurricane Center in Miami, Florida. When sustained winds reach or exceed

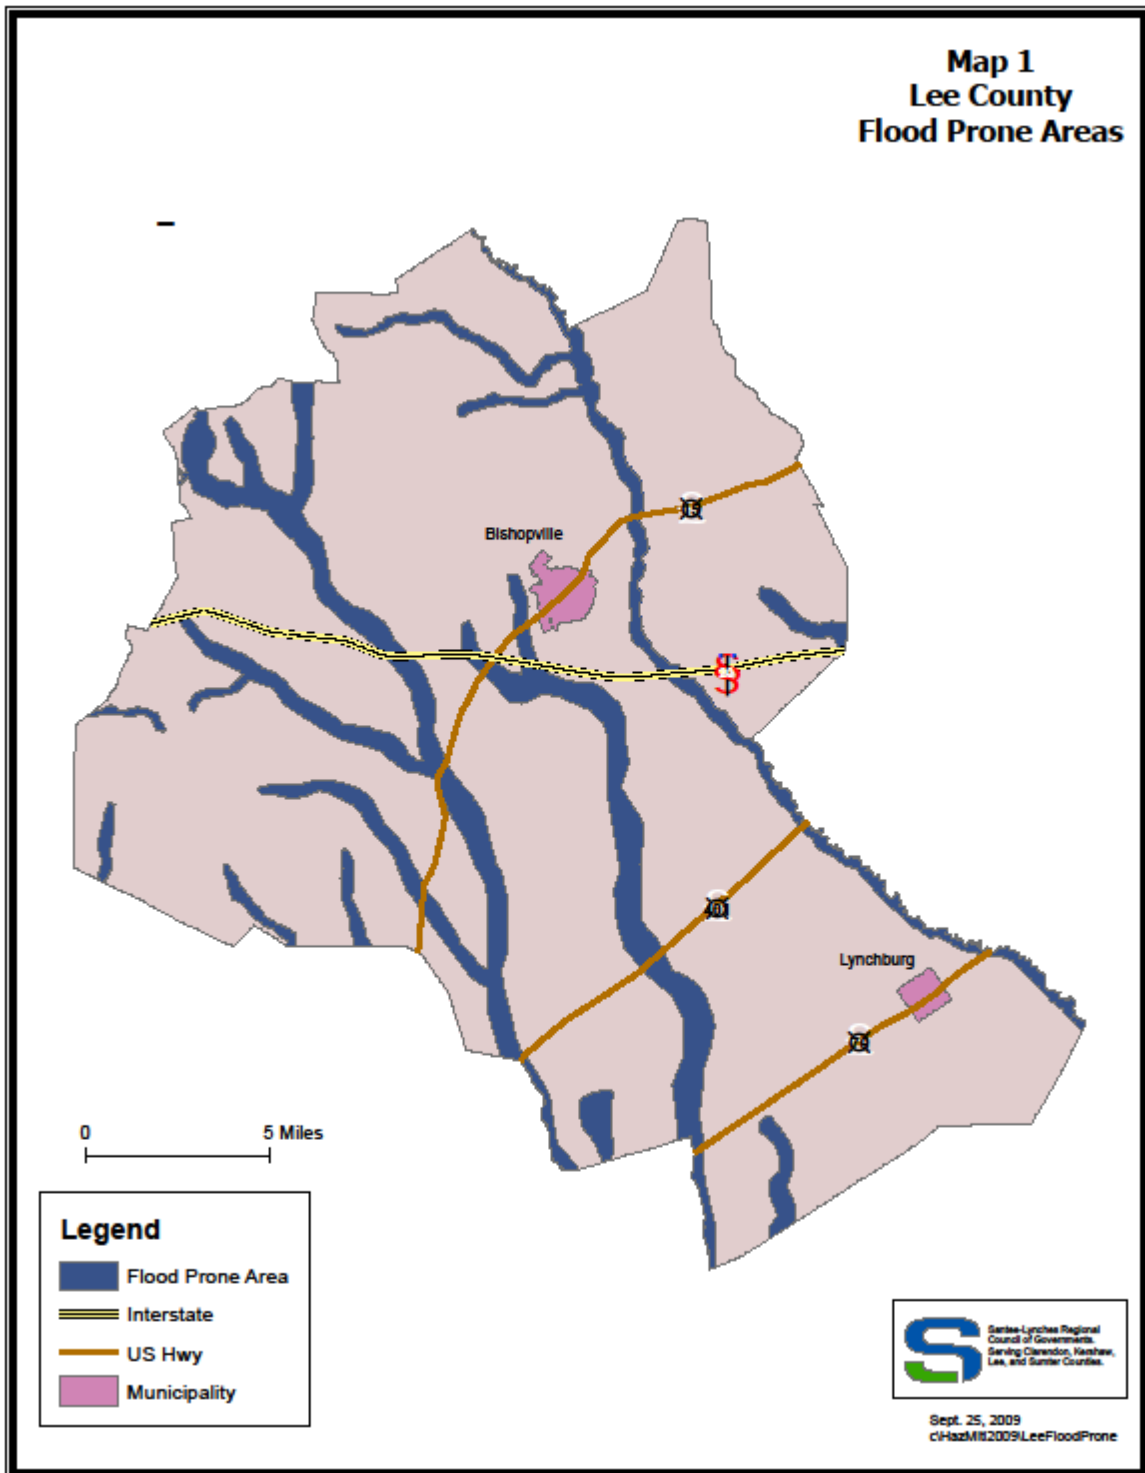

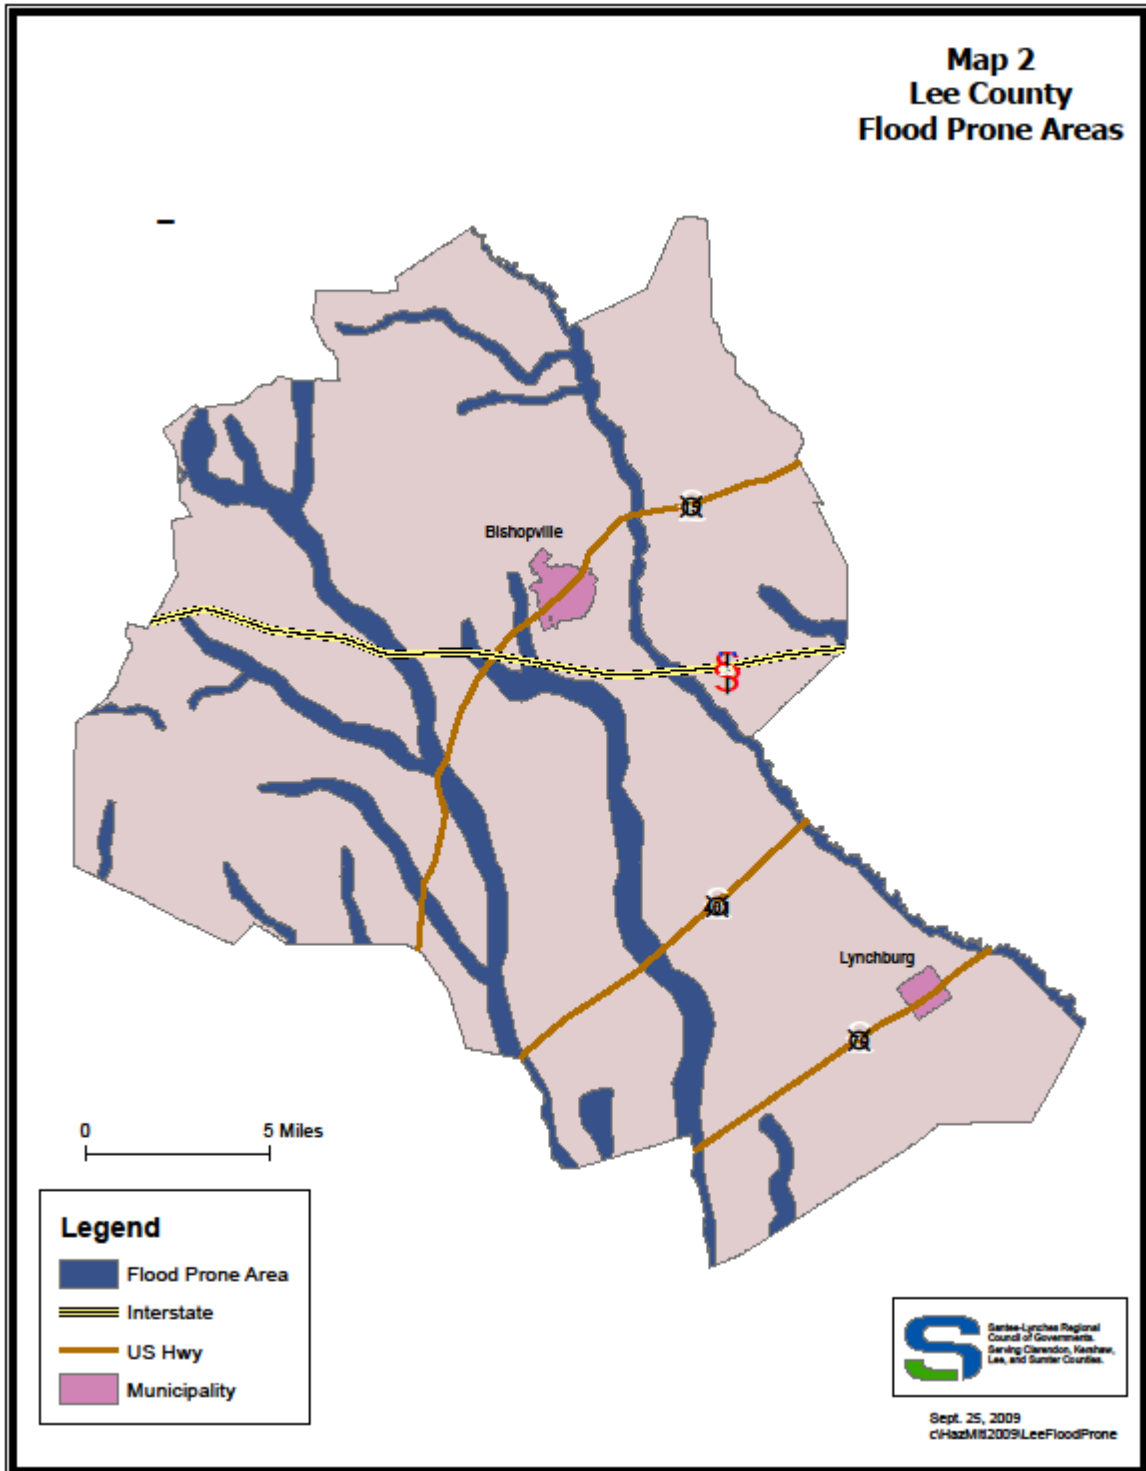

74 miles per hour, the storm is deemed a hurricane.

Hurricane intensity is further classified by the Saffir-Simpson Scale, which rates hurricane intensity on a scale of 1 to 5, with 5 being the most intense. The Saffir-Simpson scale is shown in **Table A-5**.

TABLE A-5
The Saffir-Simpson Scale

Saffir-Simpson Scale / Category	Maximum Sustained Wind Speed (mph)	Minimum Surface Pressure (millibars)	Storm Surge (ft)
1	74-95	Greater than 980	5-Mar
2	96-110	979-965	8-Jun
3	111-130	964-945	12-Sep
4	131-155	944-920	13-18
5	155+	Less than 920	19+

Source: National Hurricane Center

The Saffir-Simpson scale categorizes hurricane intensity linearly based upon maximum sustained winds, barometric pressure and storm surge potential, which are combined to estimate potential damage. Categories 3, 4, and 5 are classified as “major” hurricanes, and while hurricanes within this range comprise only 20% of total tropical cyclone landfalls, they account for over 70% of the damage in the U.S.

Table A-6 describes the damage that could be expected for each category hurricane.

TABLE A-6
Hurricane Damage Classification

Hurricane Damage Classification	Category Damage Level Description
1 – Minimal	No real damage to building structures. Damage primarily to unanchored mobile homes, shrubbery, and trees. Also, some coastal flooding and minor pier damage.
2 – Moderate	Some roofing material, door, and window damage. Considerable damage to vegetation, mobile homes, etc. Flooding damages piers and small craft in unprotected moorings may break their moorings.
3 – Extensive	Some structural damage to small residences and utility buildings, with a minor amount of curtainwall failures. Mobile homes are destroyed. Flooding near the coast destroys smaller structures with larger structures damaged by floating debris. Terrain may be flooded well inland.
4 – Extreme	More extensive curtainwall failures with some complete roof structure failure on small residences. Major erosion of beach areas. Terrain may be flooded well inland.
5 – Catastrophic	Complete roof failure on many residences and industrial buildings. Some complete building failures with small utility buildings blown over or away. Flooding causes major damage to lower floors of all structures near the shoreline. Massive evacuation of residential areas may be required.

Source: National Hurricane Center

Damage during hurricanes may also result from **spawned tornadoes** and **inland flooding** associated with heavy rainfall that usually accompanies these storms. Hurricane Hugo in 1989, for example, caused massive inland flooding when it made landfall in Charleston County and proceeded inland towards Columbia and ultimately continued North through Sumter and Lee Counties.

Historical Occurrences:

Reliable classification of the intensity of tropical cyclones began in 1886. Since that time, there have been 951 tropical cyclones that have been recorded in the Atlantic Ocean and the Gulf of Mexico. Approximately 294 or 31% of those tropical cyclones passed within 300 miles of South Carolina.

According to the University of South Carolina's Hazards Lab, 97 tropical cyclones have made direct landfall in South Carolina or have entered via adjacent states since 1886. Of these, 72 were tropical storms, 21 were minor hurricanes and 4 were major hurricanes.

1989 saw the most costly hurricane to ever hit South Carolina, **Hurricane Hugo**. Hurricane Hugo made landfall as a Category 4 storm near Charleston and its progression inland resulted in unprecedented, widespread damage across South Carolina. The Category 4 storm made landfall near Sullivan's Island, South Carolina, at 2300 EST on September 21, 1989. The hurricane caused 13 directly related deaths, 22 indirectly related deaths, and injured several hundred people in South Carolina. Damage within the Palmetto State from Hurricane Hugo has been estimated to exceed \$7 billion, including \$2 billion in crop damage. The estimated maximum sustained winds at landfall were 138 miles per hour.

According to the University of South Carolina's Hazards Lab and the National Climatic Data Center, there have been 14 hurricanes or tropical storms that have passed over Lee County since 1851.

Table A-7
Hurricanes/Tropical Storms in Lee County (1852-2009)

Name	Date	Wind mph	Category
Not Named	10/4/1877	46	TS
Not Named	9/12/1878	92	H1
Not Named	7/1/1886	52	TS
Not Named	9/10/1888	40	TS
Not Named	9/18/1906	69	TS
Not Named	10/9/1913	40	TS
Not Named	10/2/1929	46	TS
Not Named	9/5/1935	63	TS
Not Named	9/17/1945	46	TS
Not Named	9/24/1947	40	TS
Cindy	7/9/1959	40	TS
Alma	5/26/1970	29	TD
Helene	9/23/2000	29	TD
Not Named	8/29/2004		TS

Map 3 displays the centerline of where the eye of these storms passed through Lee County. The name (if applicable) appears on the centerline itself. The eye to Hurricane Hugo passed over an area between two of Lee County's primary population centers.

**Table A-8
Hazard Probability**

	Events	Years	Recurrence Interval	% Chance/Year
Tropical Storm/Tropical Depression	13	157	12.0769231	8.28%
Category 1	1	157	157	0.64%
Category 2	0	157	0	0
Category 3	0	157	0	0
Category 4	0	157	0	0.00

Hurricane and Tropical Storm Occurrences in Lee County since 2002

Tropical Storm on August 29, 2004 at 9:30 am – Large branches and a few small trees were down in Chesterfield County due to tropical storm force winds.

Multi-jurisdictional Occurrences:

Lee

Given their wide-ranging impact, hurricanes affect all parts of the county and put all of its critical facilities at risk. Those that would need the most attention, due to their role in emergency services, would be fire/EMS stations and police stations.

Bishopville

In addition to the need to protect fire and police structures, the City of Bishopville also must consider mitigation measures for critical infrastructure, such as water, sewer, and power.

Lynchburg

In addition to the need to protect fire and police structures, the Town of Lynchburg also must consider mitigation measures for critical infrastructure, such as water, sewer, and power.


C. TORNADOES

Description:

A tornado is a violent windstorm characterized by a twisting, funnel-shaped cloud extending to the ground. It is most often generated by a thunderstorm (but sometimes results from hurricanes) and produced when cool, dry air intersects and overrides a layer of warm, moist air forcing the warm air to rise rapidly. The damage from a tornado is a result of the high wind velocity and wind-blown debris, although they are commonly accompanied by large hail as well. The most violent tornadoes have rotating winds of 250 miles per hour or more and are capable of causing extreme destruction.

Most tornadoes are just a few dozen yards wide and touch down only briefly, but highly destructive tornadoes may carve out a path over a mile wide and several miles long. The level of destruction caused by tornadoes may range from light to inconceivable depending on the intensity, size and duration of the storm. Typically, tornadoes cause the greatest damage to structures of light construction, such as residential homes, and are quite localized in their impact.

Each year, an average of 800-1000 tornadoes are reported nationwide, and they are more likely to occur during the spring and early summer months of March through June. Tornadoes can occur at any time of day but are mostly likely to form in late afternoons

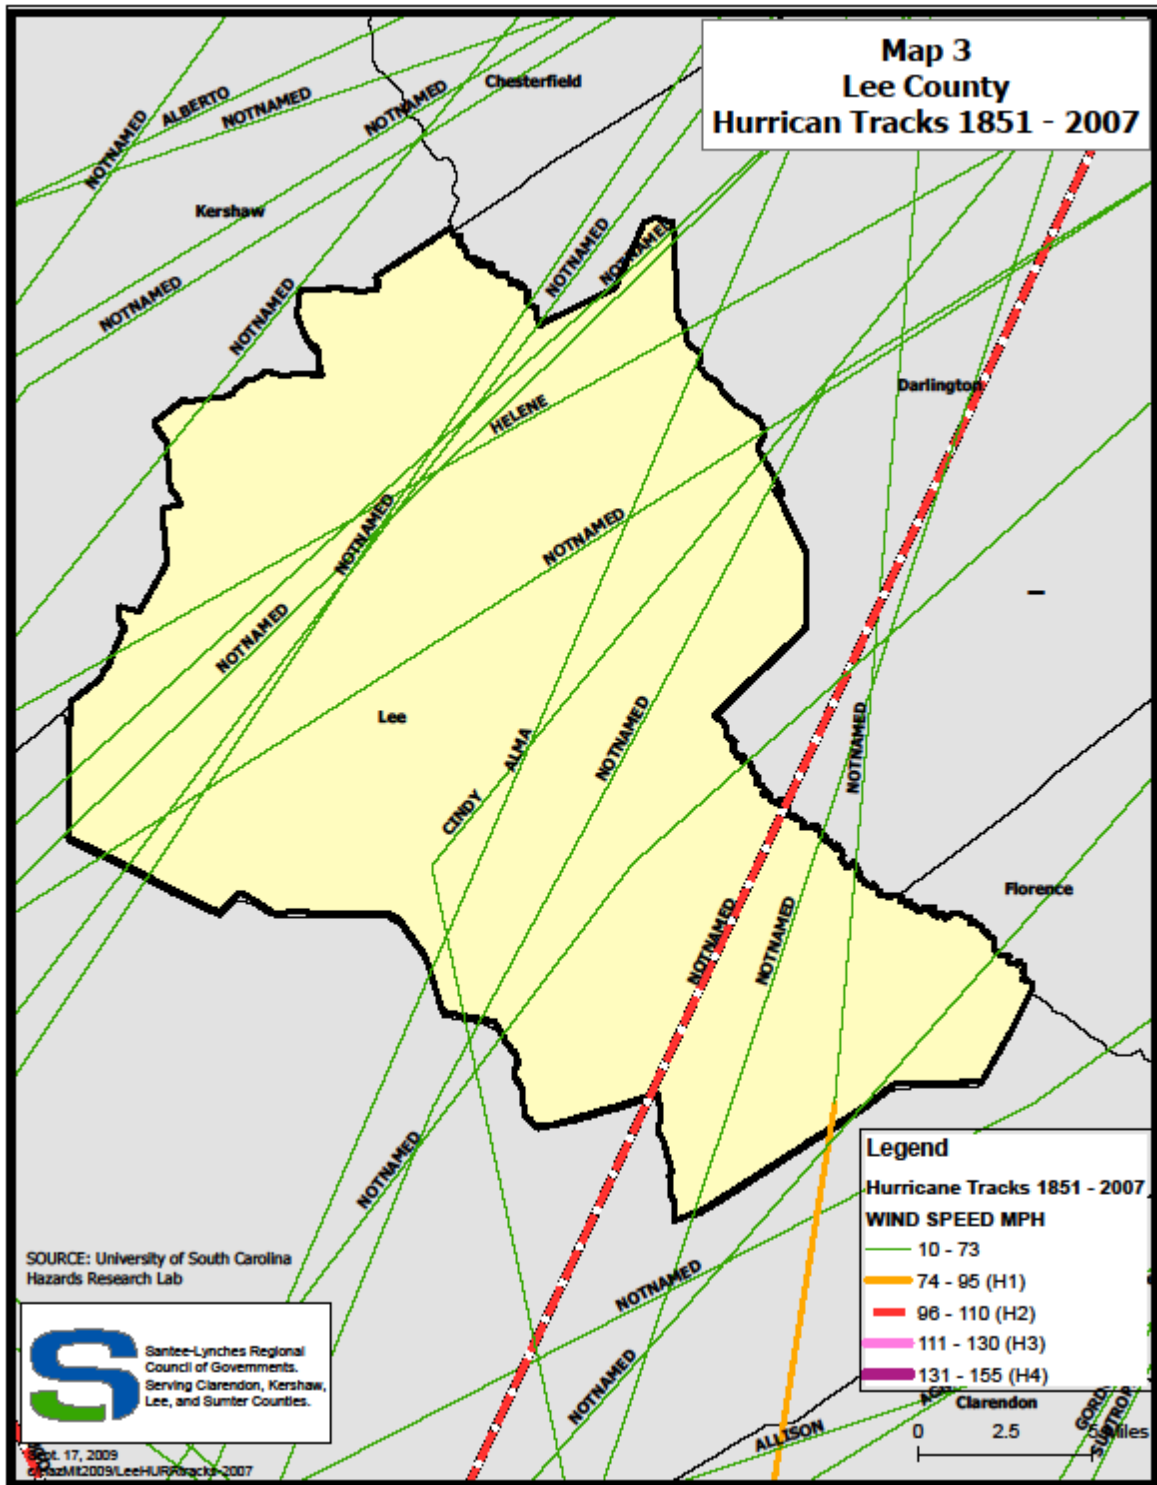

and early evenings.

The Fujita-Pearson Scale for Tornadoes was developed to measure tornado strength, and is shown in **Table A-9**.

Hurricane and Tropical Storm Occurrences in Lee County since 2002

Tropical Storm on August 29, 2004 at 9:30 am – Large branches and a few small trees were down in Chesterfield County due to tropical storm force winds.

Multi-jurisdictional Occurrences:

Lee

Given their wide-ranging impact, hurricanes affect all parts of the county and put all of its critical facilities at risk. Those that would need the most attention, due to their role in emergency services, would be fire/EMS stations and police stations.

Bishopville

In addition to the need to protect fire and police structures, the City of Bishopville also must consider mitigation measures for critical infrastructure, such as water, sewer, and power.

Lynchburg

In addition to the need to protect fire and police structures, the Town of Lynchburg also must consider mitigation measures for critical infrastructure, such as water, sewer, and power.

C. TORNADOES

Description:

A tornado is a violent windstorm characterized by a twisting, funnel-shaped cloud extending to the ground. It is most often generated by a thunderstorm (but sometimes results from hurricanes) and produced when cool, dry air intersects and overrides a layer of warm, moist air forcing the warm air to rise rapidly. The damage from a tornado is a result of the high wind velocity and wind-blown debris, although they are commonly accompanied by large hail as well. The most violent tornadoes have rotating winds of 250 miles per hour or more and are capable of causing extreme destruction.

Most tornadoes are just a few dozen yards wide and touch down only briefly, but highly destructive tornadoes may carve out a path over a mile wide and several miles long. The level of destruction caused by tornadoes may range from light to inconceivable depending on the intensity, size and duration of the storm. Typically, tornadoes cause the greatest damage to structures of light construction, such as residential homes, and are quite localized in their impact.

Each year, an average of 800-1000 tornadoes are reported nationwide, and they are more likely to occur during the spring and early summer months of March through June. Tornadoes can occur at any time of day but are mostly likely to form in late afternoons and early evenings.

The Fujita-Pearson Scale for Tornadoes was developed to measure tornado strength, and is shown in **Table A-9**.

TABLE A-9
Fujita-Pearson Scale for Tornadoes

F Scale	Magnitude	Wind Speed	Damage Caused
F0	Gale tornado	40-72 mph	Some damage to chimneys; breaks branches off trees; pushes over shallow-rooted trees; damages to sign boards.
F1	Moderate tornado	73-112 mph	The lower limit is the beginning of hurricane wind speed; peels surface off roofs; mobile homes pushed off foundations or overturned; moving autos pushed off the roads; attached garages may be destroyed.
F2	Significant tornado	113-157 mph	Considerable damage. Roofs torn off frame houses; mobile homes demolished; boxcars pushed over; large trees snapped or uprooted; light object missiles generated.
F3	Severe tornado	158-206 mph	Roof and some walls torn off well-constructed houses; trains overturned; most trees in forest uprooted.
F4	Devastating tornado	207-260 mph	Well-constructed houses leveled; structures with weak foundations blown off some distance; cars thrown and large missiles generated.
F5	Incredible tornado	261-318 mph	Strong frame houses lifted off foundations and carried considerable distances to disintegrate; automobile sized missiles fly through the air in excess of 100 meters; trees debarked; steel re-enforced concrete structures badly damaged.
F6	Inconceivable tornado	319-379 mph	These winds are very unlikely. The small area of damage they might produce would probably not be recognizable along with the mess produced by F4 and F5 wind that would surround the F6 winds. Missiles, such as cars and refrigerators would do serious secondary damage that could not be directly identified as F6 damage. If this level is ever achieved, evidence for it might only be found in some manner of ground swirl pattern, for it may never be identifiable through engineering studies.

Source: *The Tornado Project*

Historical Occurrences:

There were 670 confirmed tornado touchdown events in South Carolina between 1950 and 2001 according to the [National Climatic Data Center](#) that resulted in 72 deaths and 1842 injuries. Typically, South Carolina tornadoes are less severe than in other parts of the country.

According to the Hazards Lab, there have been 9 confirmed tornado events in Lee County since 1950, which have resulted in no deaths and 8 injuries. The strongest tornado ever recorded in Lee County is an F2, which occurred on October 1, 1966, and resulted in injuring 8 people.

Table A-10 lists all tornado events reported for Lee County between 1950 and October, 2009.

TABLE A-10
Tornadoes in Lee County (1950 – October 2009)

Location	Date	Time	Magnitude	Deaths	Injuries	Property Damage	Crop Damage
Lee	2/9/1962	5:00 PM	F1	0	0	\$25000	0
Lee	10/1/1966	11:30 PM	F2	0	8	\$25000	0
Lee	5/24/1973	4:00 PM	F1	0	0	\$3000	0
Lee	5/20/1980	11:55 PM	F0	0	0	\$25000	0
Manville	9/7/2004	7:40 AM	F1	0	0	0	0

Bishopville	9/7/2004	8:10 AM	F0	0	0	0	0
Bishopville	9/27/2004	1:03 PM	F0	0	0	0	0
St Charles	4/15/2007	7:50 AM	F1	0	0	\$5000	0
Ashwood	3/15/2008	5:52 PM	F1	0	0	0	0

Map 4 shows the location of these storms in the context of the geography of Lee County. The red triangles on the map show where the tornadoes touched down and were mapped according to the latitude and longitude coordinates collected by the University of South Carolina Hazards Research Lab.

Table A-11
Hazard Probability

	Events	Years	Recurrence Interval	% Chance/Year
Tornadoes	9	59	6.56	15.25%

Tornado Occurrences in Lee County since 2002

Tornado on September 7, 2004 at 7:40 am – A strong F1 tornado took down huge trees and powerlines, and also did moderate damage to several homes and a cotton gin mill.

Tornado on September 7, 2004 at 8:10 am – Storm chaser reported an F0 did minor damage to a mobile home and took down some trees and powerlines.

Tornado on September 27, 2004 at 1:03 pm – An F0 touched down in Bishopville then again in the Lucknow area. Trees and powerlines were down with minor damage to a couple of homes.

Tornado on April 15, 2007 at 7:50 am – An EF1 tornado took down numerous trees, a few power lines, did minor damage to Mt. Pleasant AME Church at the intersection of Vista Land and Wells Church Road, and did minor damage to a mobile home. A cold front with strong dynamics and windshear pushed into the region late Saturday and early Sunday. Hail and microbursts accompanied the first wave of storms while the second wave produced 6 tornadoes. The largest was an EF3 that killed 1 person and injured 3 others across the region.


Tornado on March 15, 2008 at 14:52 pm – Storm Survey and Emergency Manager found damage to several homes, mobile homes, and a church in the Ashwood and Red Hill areas on Green Lane, Taproot, Day Lilly, and other secondary roads. Numerous trees and power lines were down in the Lynchburg area. Seven supercells tracked across our South Carolina Warning Area and produced many long lived tornadoes that did significant damage. Over 85 homes were destroyed, around 400 had moderate damage, and estimates for the total devastation were around \$40 Million

Multi-jurisdictional Occurrences:

According to the historical frequency of tornadoes in the County (see **Map 14**) the following deductions can be made for the jurisdictions within Lee:

Lee

Given their unpredictable nature, tornados can occur anywhere, but by using the

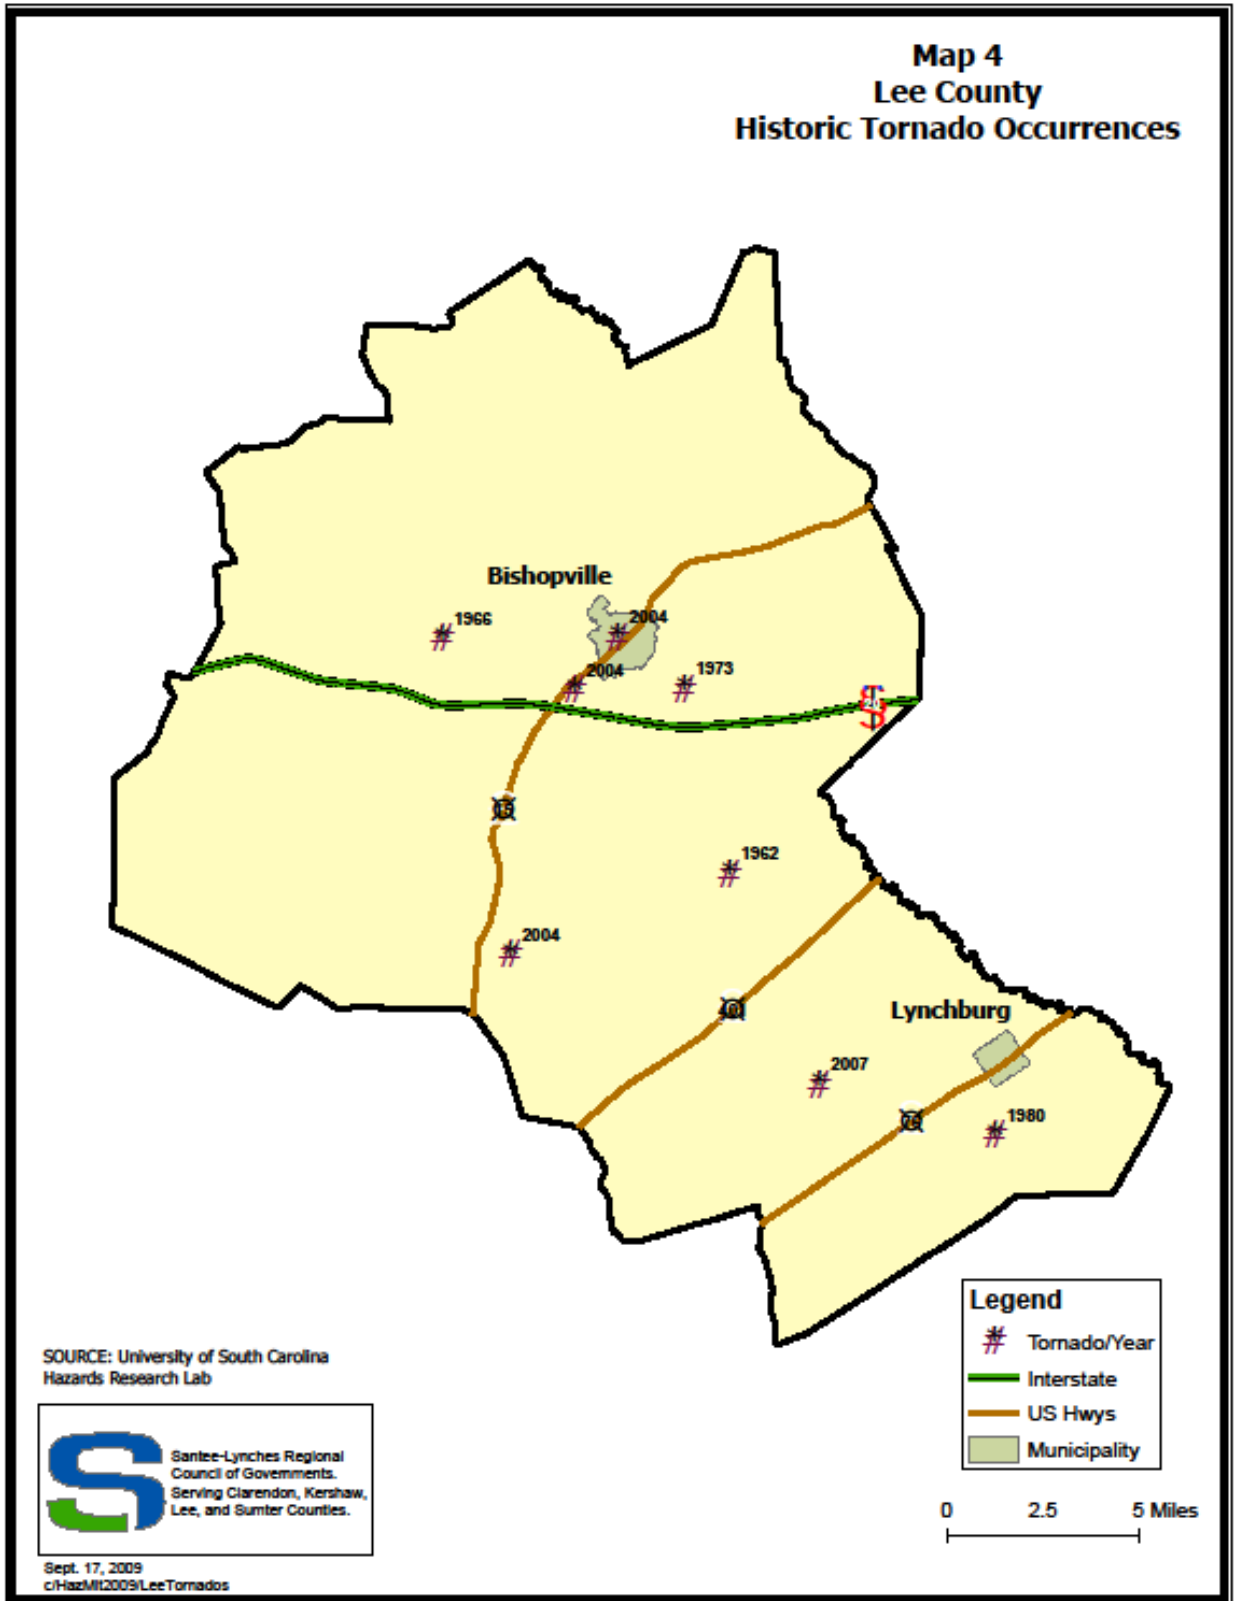

historical data, as a sort of barometer then it is apparent that the City of Bishopville and the area just east of the City are the most vulnerable, except for an extremely rural section of the County in the southwest. According to the historical information, the critical facility most at risk is the emergency shelter at Lee Central High.

Bishopville

Bishopville is moderately vulnerable, being located in an area that has experienced the some storm activity. Given the unpredictable nature of tornados all critical facilities are at risk.

Lynchburg

According to the historical data, Lynchburg is at low risk for tornados. However, given the unpredictable nature of tornados all critical facilities are at risk.

D. SEVERE WINTER STORMS

Description:

Severe winter storms can produce an array of hazardous weather conditions, including **heavy snow, freezing rain and ice pellets, high winds** and **extreme cold**. Severe winter storms are usually extra-tropical cyclones (storms that form outside of the warm tropics) fueled by strong temperature gradients and an active upper-level cold jet stream. Winter storms can paralyze a community by shutting down normal day-to-day operations, as accumulating snow and ice result in downed trees, power outages and blocked or hazardous transportation routes. Heavy snow can also lead to the collapse of weak roofs or unstable structures. Frequently the loss of electric power means loss of heat for residents, which poses a significant threat to human life, particularly the elderly. The level of impact severe winter weather will have upon the community greatly depends on its ability to manage and control its effects, such as the rapid mobilization of snow removal equipment. Due to the rare occurrence of severe winter weather in South Carolina, coupled with the expensive costs to acquire and maintain the necessary resources to combat their effects, many communities are not prepared for such events.


Historical Occurrences:

Although severe winter storms are typically associated with much colder climates, it is not uncommon for South Carolina to experience significant, even disastrous, winter weather events. Presidential disasters for winter storms were declared in South Carolina in January 2000, January 2003 and February 2004.

Since **1950**, there have been no injuries or deaths attributed to snow and ice events throughout the state. However, there have been an estimated 30.5 million dollars in property damage and an additional 5 million in crop damage. In most instances, these impacts are more likely to be felt in the mountains and Piedmont region of the state.

According to data acquired from the National Climatic Data Center, Lee County had **9** ice or snow events between **1994 and 2009**. **Map 5** shows Lee County in relation to the rest of South Carolina. As indicated on the map, the central portion of the state, where Lee is located experienced a low to moderate amount of storms during this eight-year period. However, in 2004 the County experienced a severe ice storm, which caused extensive damage and resulted in loss of power for several days.

Map 5
Lee County
Winter Storms 1950 - 2008
Compared to other SC Counties

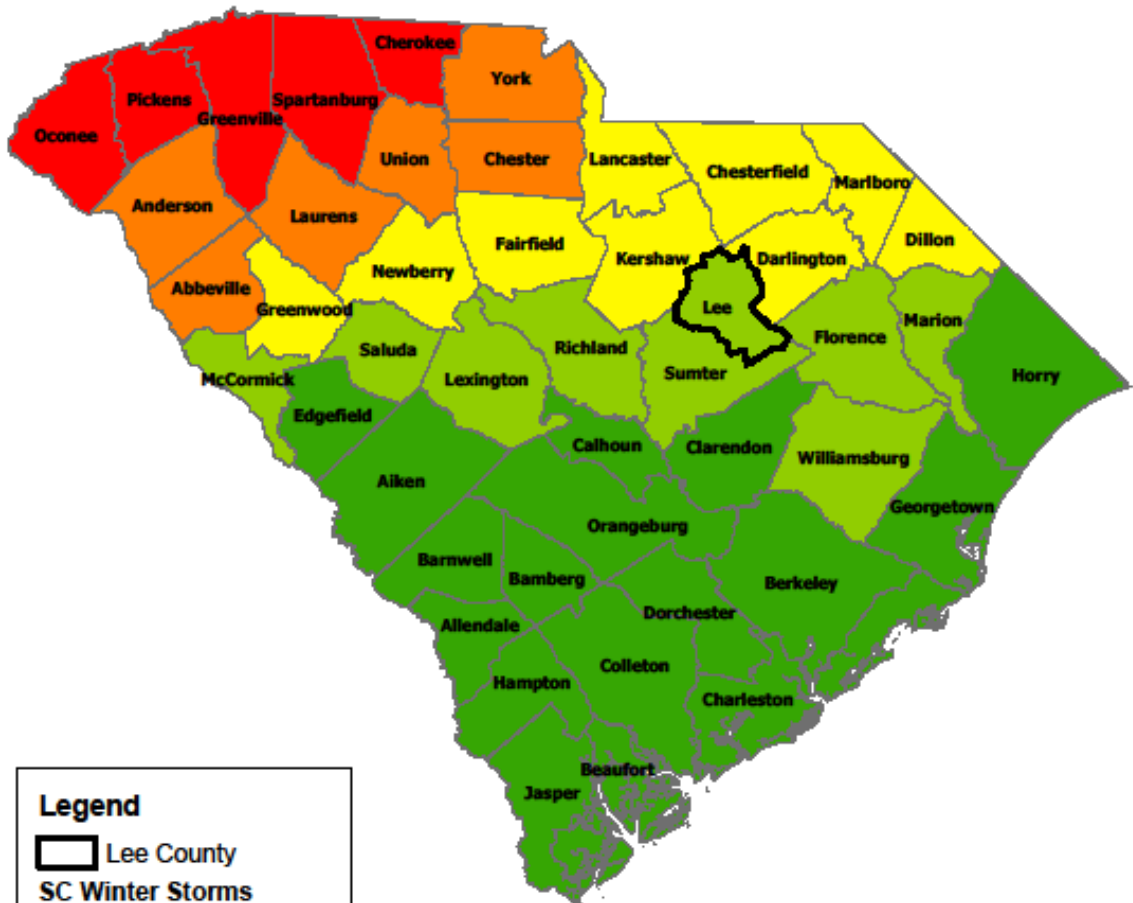

Legend


Lee County

SC Winter Storms

Total Events 1950 - 2008

- 1 - 5
- 6 - 9
- 10 - 22
- 23 - 40
- 40 - 74

Source: University of South Carolina Hazards Research Lab



Sept. 23, 2009
c:\HazMit2009\LeeWintStorms-2008

**Table A-12
Hazard Probability**

	Events	Years	Recurrence Interval	% Chance/Year
Winter Storm	9	15	1.67	60%

Severe Winter Storm Occurrences in Lee County since 2002

Ice Storm on December 4, 2002 at 7:55 am – A major ice storm produced an inch of ice that took down many trees and powerlines. Roads were hazardous. Many were without power for several days. Freezing rain fell over most of the Midlands, Pee Dee, and Western CSRA. Ice accumulations were around a quarter of an inch in McCormick, Saluda, Lexington, Richland, Sumter, and Lee Counties. Around a half inch of ice accumulated in Newberry, Fairfield, and Kershaw Counties. Lancaster and Chesterfield Counties were hardest hit with around an inch of ice. Many trees and powerlines were down in these two counties and people in Lancaster County went without power for several days.

Winter Storm on January 23, 2003 at 6:00 am – A winter storm produced 4-7 inches of snow causing power outages for 3,500 homes. There were many traffic accidents with some injuries. A winter storm rapidly developed over the South Carolina central and northern midlands. This storm system produced 2-4 inches of snow in the central midlands and 4-7 inches of snow in the northern midlands. There were numerous traffic accidents with some minor injuries and no deaths. Some power outages occurred leaving about 10,000 homes without power for several hours.

Ice Storm on January 25, 2004 at 5:30 pm – An ice storm began over the Northern Midlands of South Carolina on Sunday night and gradually spread south into the Central Midlands and CSRA on Monday. The storm continued into Tuesday, but was mainly freezing drizzle during that time. Ice accumulations of ½ to ¾ of an inch occurred which brought numerous trees and powerlines down. The heaviest ice accumulations occurred in Lancaster, Chesterfield, Fairfield, Newberry, Saluda, McCormick, Orangeburg, and Clarendon Counties. Over 250,000 homes, businesses, and schools were without power for several days. Sleet also fell in Lancaster and Chesterfield Counties and accumulated up to 2 inches. Six people were injured in traffic related accidents and there were no deaths. Damage estimates from State Emergency Management were \$28.5 million.

Ice Storm on December 26, 2004 at 4:15 am – An ice storm in the midlands produced ¼ to ¾ inches of ice taking down trees and powerlines. Some areas also reported sleet that accumulated up to an inch. Several power outages were reported, some that lasted almost a week. Numerous traffic accidents occurred.

Ice Storm on January 29, 2005 at 12:20 pm – An ice storm started late Friday night and continued off and on through Saturday night. Most areas received a quarter of an inch of ice on trees and other structures. Some areas received a quarter to a half inch of ice. These areas had some power outages which were of short duration. Overpasses and bridges iced up but ground temperatures of roadways kept the rain from freezing on them. Still, there were many accidents from people losing control when driving over the bridges and overpasses.

Winter Storm on January 20, 2009 t 4:00 am – Sheriff reported 1 to 3 inches of snow fell across Kershaw County closing some schools and some businesses. The deeper snow fell in the northern part of the county. A few secondary dirt roads were slushy and slippery at times. A winter weather event produced 1 to 4 inches of snow across the upper Midlands and Pee Dee region of South Carolina. There were few problems as surface temperatures were in the 40s and most of the snow melted when it came down on the highways, but remained on grassy surfaces for about a day.

Winter Weather on January 20, 2009 at 4:00 am – Sheriff reported a half an inch to an inch of snow fell across northern Richland County closing some schools and causing 2 hours delays at others. A winter weather event produced 1 to 4 inches of snow across the upper Midlands and Pee Dee region of South Carolina. There were few problems as surface temperatures were in the 40x and most of the snow melted when it came down on the highways, but remained on grassy surfaces for about a day.

Winter Weather on February 4, 2009 at 3:45 am – Emergency Manager reported around an inch of snow fell over portions of northern and eastern Kershaw County. A couple of schools had 2 hour delays. Snow fell over portions of the north Midlands and Pee Dee region of the State.

Multi-jurisdictional Occurrences:

Lee

Given that severe winter storms tend to cover fairly large areas, the overall risk to the county is fairly equal, but the various jurisdictions have assets that are vulnerable to this type of hazard.

Bishopville

The City of Bishopville has an electric power substation that would be susceptible to winter storms.

Lynchburg

The Town of Turbeville does not have any assets that are at significant risk due to winter storms.

E. DAM FAILURE

Description:

Dams are water storage, control, or diversion barriers that impound water upstream in reservoirs. Dam failure is a collapse or breach in the structure. While most dams have storage volumes small enough that failures have little or no repercussions, dams with large storage amounts can cause significant flooding downstream.

Dam failures can result from any one or a combination of the following causes:

- Prolonged periods of rainfall and flooding, which cause most failures
- Inadequate spillway capacity, resulting in excess overtopping flows.
- Internal erosion caused by embankment or foundation leakage or piping.
- Improper maintenance, including failure to remove trees, repair internal seepage problems, replace lost material from the cross section of the dam and abutments, or maintain gates, valves, and other operational components.
- Improper design, including the use of improper construction materials and construction practices.
- Negligent operation, including the failure to remove or open gates or valves

- during high flow periods.
- Failure of upstream dams in the same drainage basin.
- Landslides into reservoirs, which cause surges that result in overtopping.
- High winds, which can cause significant wave action and result in substantial erosion.
- Earthquakes, which typically cause longitudinal cracks at the tops of the embankments, leading to structural failure.

Dam Classification:

The South Carolina Department of Health and Environmental Control, Dam Safety Programs has classified dams that would pose a safety hazard to human life and property into two classifications. A Class I dam is one that would cause a loss of human life. A Class II dam is one that would cause significant property damage.

There were thirty-two (32) Class I and Class II dams in the Santee-Lynches Region. Kershaw County had the most Class I and Class II dams – 4 and 10 respectively. Sumter County has the second higher number of dams with 11 Class II dams. The number of Class I and II dams by County is indicated below. A list of dams with the name and location by Class is shown in Appendix H.

**Table A-13
Dam Classes by County**

County	Class I	Class II	Total
Clarendon County	0	3	3
Kershaw County	4	10	14
Lee County	0	4	4
Sumter County	0	11	11
SL Region	4	28	32

Historical Occurrences:

South Carolina has a large number of dams, ranging from large structures for power generation, recreation and water supply to smaller dams for industrial, agricultural or fishing purposes. More than 200 of these dams have been rated high hazard due to potential loss of life and property should failure occur. The overall potential for dam failure based on historical records is low. Flood conditions which occurred in the month of October 1990, however, resulted in the failure of 17 dams and the overtopping of an additional 31 dams. Four people were drowned as a result of the Kendall Dam failure in Camden, SC. None of the major dams in the state was threatened by the October 1990 floods.

**Table A-14
Future Probabilities**

	Events	Years	Recurrence Interval	% Change/Year
Dam Failure	0	20	*	0

Dam Failure Occurrences in Lee County since 2002

There was no dam failure events reported

Future Probability:

There are few dams which could have an affect of property or population in Lee County.

Probability:

There is little probability of dam failure based on known information and history.

Hazard Rating:

Ratings are low except for history which is medium.

Multi-jurisdictional Occurrences:Lee

Lee County has a number of small dams within the vicinity of the various watersheds in the County. The area most at risk for dam failure is the center of the County, because of the Black River and Lynches River.

Bishopville

The City of Bishopville is at a moderate level of risk. As such, any of the City's assets would not be at risk in the case of dam failures.

Lynchburg

Lynchburg is not at significant risk.

Table A-15
Lee County
Multi-jurisdiction Analysis of Potential Dam Failures*

Jurisdictions	History	Vulnerability	Maximum Threat	Probability	Total Score	Jurisdiction Rating
Jurisdictions	History	Vulnerability	Maximum Threat	Probability	Total Score	Jurisdiction Rating
City of Bishopville	2	50	100	7	159	1
Town of Lynchburg	2	25	50	7	84	2
Unincorporated	2	25	10	7	44	3

Source: National Climatic Data Center

*See Appendix G for an explanation of the scoring system used for this table.

Those jurisdictions with the highest numerical scores should and will be receiving priority attention for planning and/or mitigation purposes.

F. SEVERE THUNDERSTORMS, WIND EVENTS, HAIL, & LIGHTNING**Description:**

Severe thunderstorms are defined by the National Weather Service as storms that have wind speeds of 58 miles per hour or higher, produce hail at least three quarters of an inch in diameter, or produces tornadoes. In order to form, thunderstorms simply require moisture to form clouds and rain, coupled with an unstable mass of warm air that can rise rapidly.

Thunderstorms affect relatively small areas when compared with hurricanes and winter storms, as the average storm is 15 miles in diameter and lasts an average of 30 minutes. Nearly 1,800 thunderstorms are occurring at any moment around the world,

however, of the estimated 100,000 thunderstorms that occur year in the United States only about 10 percent are classified as severe.

Thunderstorms are most likely to happen in the spring and summer months and during the afternoon and evening hours, but can occur year-round and at all hours. Despite their small size, all thunderstorms are dangerous and capable of threatening life and property in localized areas. Every thunderstorm produces **lightning**, which results from the buildup and discharge of electrical energy between positively and negatively charged areas. Each year, lightning is responsible for an average of 93 deaths (more than tornadoes), 300 injuries, and several hundred million dollars in damage to property and forests.

Thunderstorms can also produce large, damaging **hail**, which causes nearly \$1 billion in damage to property and crops annually. **Straight-line winds**, which in extreme cases have the potential to exceed 100 miles per hour, are responsible for most thunderstorm wind damage. One type of straight-line wind, the **downburst**, can cause damage equivalent to a strong tornado and can be extremely dangerous to aviation. Thunderstorms are also capable of producing **tornadoes** and heavy rain that can lead to **flash flooding**.

Historical Occurrences:

Severe thunderstorms are fairly common in South Carolina, but only a small percentage of these actually cause damages.


According to the National Climatic Data Center, there were a total of **82** significant wind events in Lee County during the period of 1955 to 2009. **These storms caused \$72,000 in property damages, no deaths, and 2 injuries.** (these events do not include tornadoes which are discussed in 1.C.).

In addition, there were **45** hail events recorded for Lee County during the same period that resulted in no deaths, injuries, or crop damage but did cause \$40,000 in property damage. There was 1 lightning event recorded between 1993 and **2009** for Lee County that resulted in no deaths but \$60,000 in property damage. **Map 6** (Wind Storm Frequency), **Map 7** (Hail Frequency), and **Map 8** (Lightning Storm Frequency) show how these hazards affect Lee in relation to the rest of South Carolina. In all three cases, Lee County is in the median range of frequency of occurrence; however, these storms are random in nature and do not follow geographic patterns.


Table A-16

Hazard Probability


	Events	Years	Recurrence Interval	% Chance/Year
Thunderstorm w/ High Winds	82	59	0.72	138.98%
Hail	45	59	1.31	76.27%
Lightning (Causing casualty or property damage)	1	16	16.00	6.25%

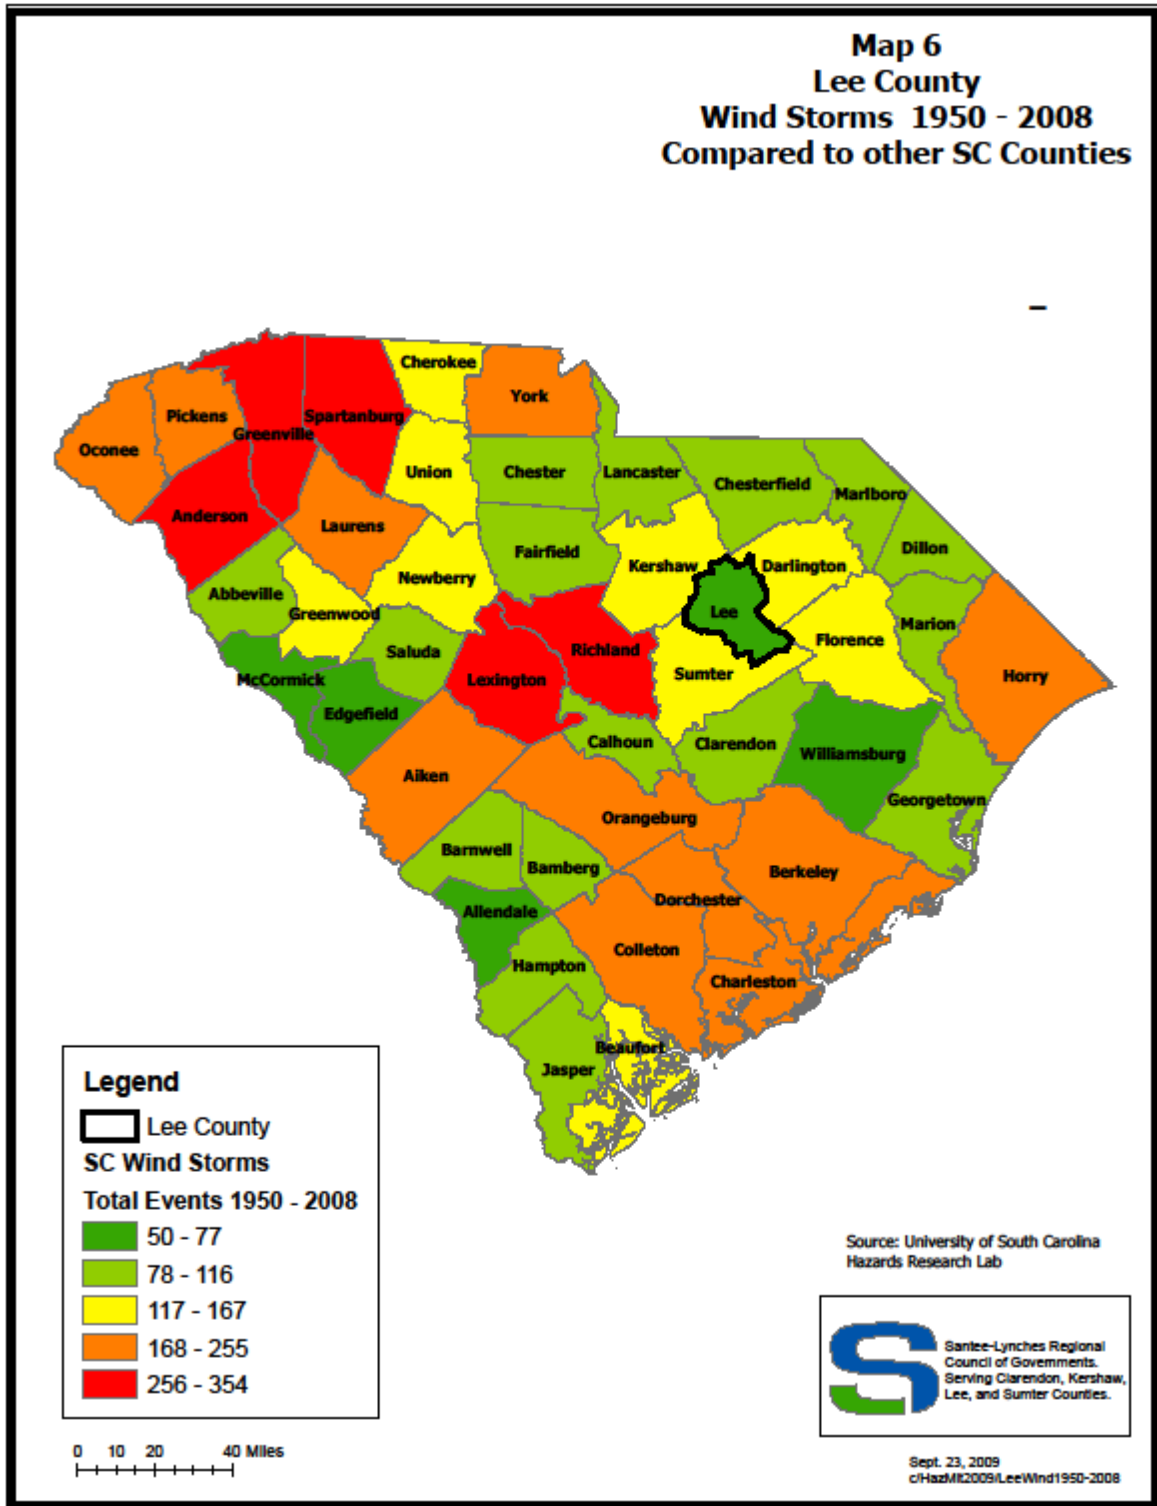

Map 7
Lee County
Hail Storms 1950 - 2008
Compared to other SC Counties

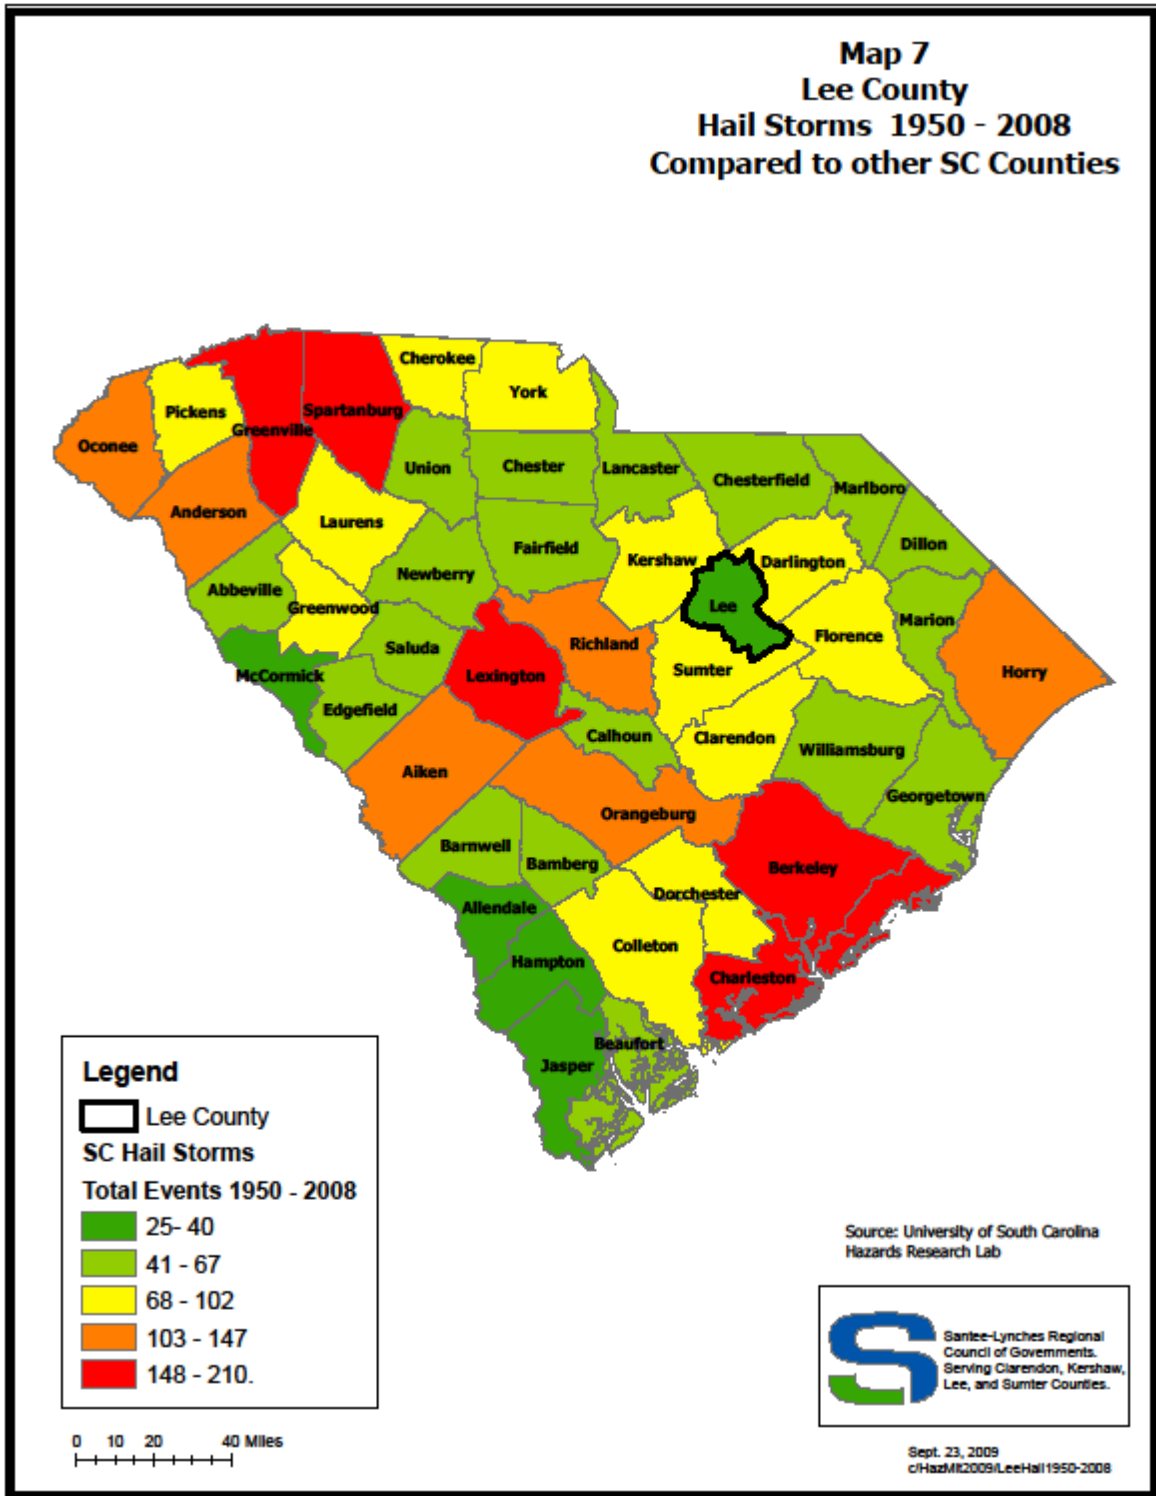

Map 8
Lee County
Lightning Storms 1993 - 2008
Compared to other SC Counties

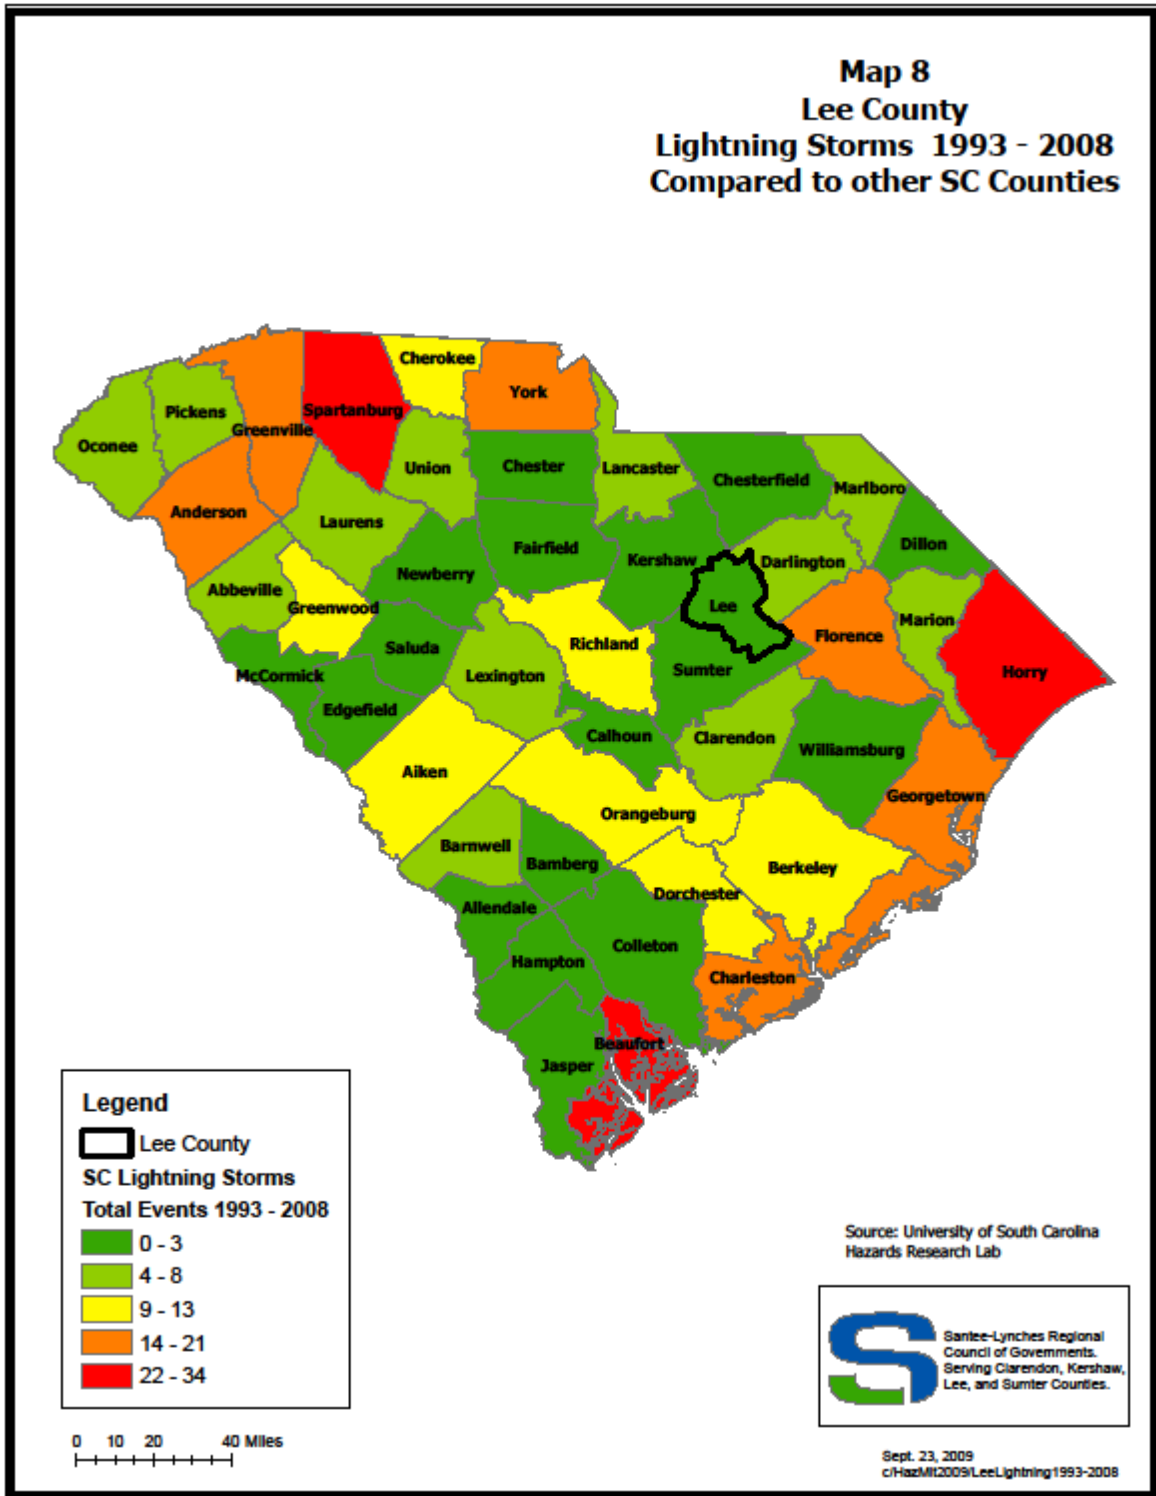

Severe Thunderstorms, Wind Events, Hail, & Lightning Occurrences in Lee County since 2002

There have been 42 hail events reported between December 1, 2002 and May 31, 2009.

There have been 33 thunderstorm & high wind events reported between December 1, 2002 and May 31, 2009.

There have been no lightning events reported between December 1, 2002 and May 31, 2009.

Multi-jurisdictional Occurrences:

Lee

Severe weather events are not geographically specific, and can occur anywhere in the County affecting any of the County's assets.

Bishopville

Severe weather events are not geographically specific, and can occur anywhere in the City affecting any of the City's assets. However, Bishopville does have an electrical power substation that is especially susceptible to lightning.

Lynchburg

Severe weather events are not geographically specific, and can occur anywhere in the Town affecting any of the Town's assets.

G. WILDFIRES

Description:

A wildfire is an undesirable, uncontrolled burning of grasslands, brush or woodlands. According to the National Weather Service, more than 100,000 wildfires occur in the United States each year. About 90% of these wildfires are started by humans (i.e., campfires, debris burning, smoking, etc.); the other 10% are started by lightning.

The potential for wildfire depends upon surface fuel characteristics, weather conditions, recent climate conditions, topography, and fire behavior. Fuels are anything that fire can and will burn, and are the combustible materials that sustain a wildfire. Typically, this is the most prevalent vegetation in a given area.

Weather is one of the most significant factors in determining the severity of wildfires. The intensity of fires and the rate with which they spread is directly related to the wind speed, temperature and relative humidity. Climatic conditions such as long-term drought also play a major role in the number and intensity of wildfires, and topography is important because the slope and shape of the terrain can change the rate of speed at which fire travels.

There are four major types of wildfires. **Ground fires** burn in natural litter, duff, roots or sometimes high organic soils. Once started they are very difficult to control, and some ground fires may even rekindle after being extinguished. **Surface fires** burn in grasses and low shrubs (up to 4' tall) or in the lower branches of trees. They have the potential to spread rapidly, and the ease of their control depends upon the fuel involved. **Crown fires** burn in the tops of trees, and the ease of their control depends greatly upon wind conditions. **Spotting fires** occur when burning embers are thrown ahead of the main fire, and can be produced by crown fires as well as wind and topographic conditions.

Once spotting begins, the fire will be very difficult to control. Wildfires become significant threats to life and property along what is known as the “wildland/urban interface.” The wildland/urban interface is defined as the area where structures and other human development meet or intermingle with undeveloped wildland or vegetative fuels. Since 1985, approximately 9,000 homes have been lost to urban/wildland interface fires across the United States.

There is no wildfire mapping or location data available for Lee County or its municipalities from the NCDC, USC Hazards Lab, or local sources. The areas within the county that are at a greater risk of wildfires are those areas that have a higher density of vegetation and forests. The land cover map (**see map 24**) shows forested and scrub/shrub areas, largely within the unincorporated county at risk from this hazard. Smaller county jurisdictions (Lynchburg) with close proximity to high risk rural areas face a higher risk than the more urbanized jurisdiction of Bishopville. Though the outskirts of urban areas are at risk due to the proximity of forested and vegetated areas, the risk in the urban core is comparatively low.

Land cover maps showing areas at risk are included in the Appendix.

Historical Occurrences:

All of South Carolina is susceptible to wildfire. According to the USC Hazards Lab, between 1988 and 2000, South Carolina has recorded a total of 64,479 wildfires that resulted in the damage of 359,277 acres. That’s an average number of 5,373 fires per year. Although wildfires are possible throughout the year, normal fire season peaks for South Carolina are in the Spring and late Fall months.

From **1988 - 2008**, Lee County had **1,663 wildfire events resulting in** 11,749 acres of land burned by wildfire, for an average of 979 acres per year. **Map 9** offers a comparison of Lee to other counties in South Carolina. Like other counties in the southeastern part of the state, Lee has experienced a large number of wildfires that can be attributed to a number of factors, ranging from climate to land use.

Table A-17
Hazard Probability

	Events	Years	Recurrence Interval	% Chance/Year
Wildfires	1,663	20	0.01	7919.05%

Wild Fire Occurrences in Lee County since 2002


There were no events reported between December 1, 2002 and May 31, 2009.

Multi-jurisdictional Occurrences:

Lee

Wildfires are not geographically specific, and can occur anywhere in the County affecting any of the County’s assets. The unincorporated county is more vulnerable to wildfires than the municipalities, simply because of the fact that there is more forested areas in the unincorporated county.

Map 9
Lee County
Wildfires 1988 - 2008
Compared to other SC Counties

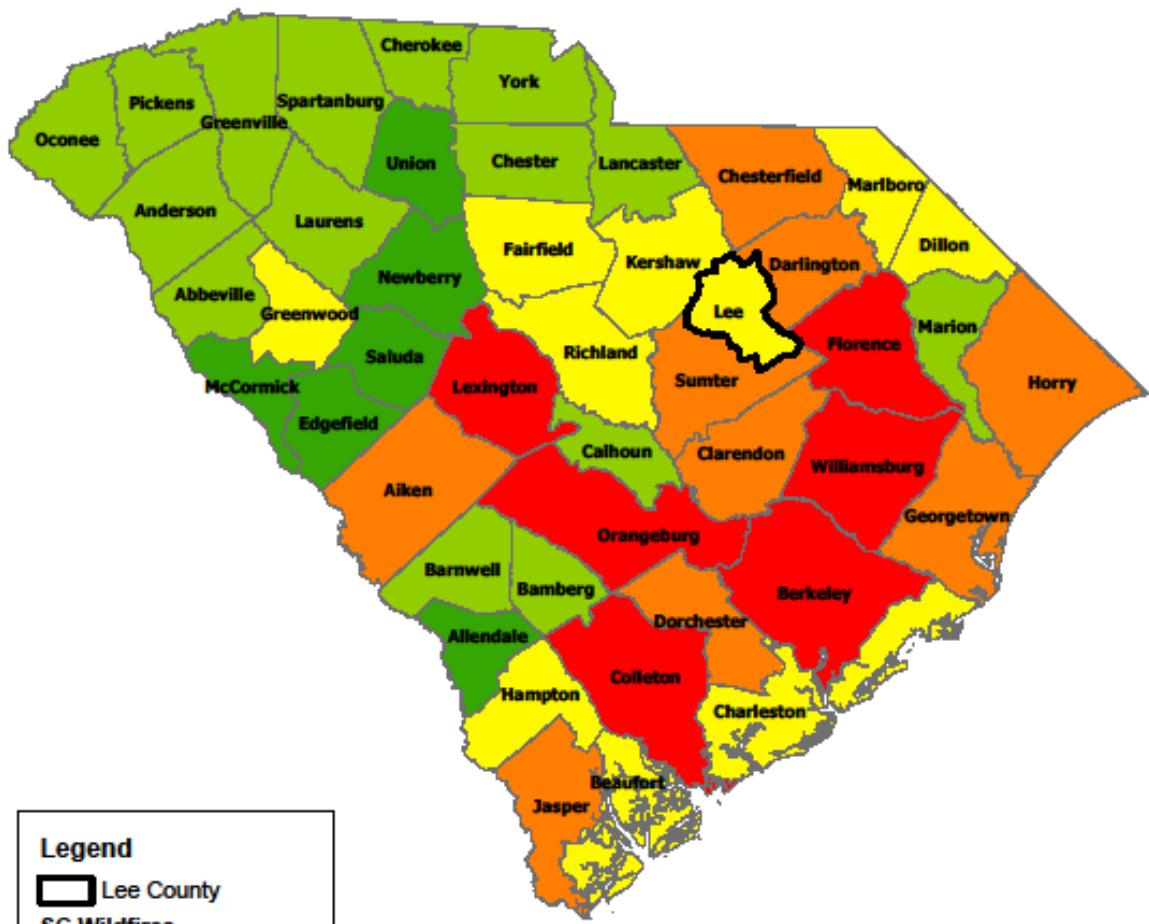


Legend

- Lee County
- SC Wildfires
- Total Events 1988 - 2008
- 642 - 784
- 785 - 1168
- 1169 - 2233
- 2234 - 3604
- 3605 - 6488

Source: University of South Carolina
Hazards Research Lab

Santee-Lynches Regional
Council of Governments.
Serving Clarendon, Kershaw,
Lee, and Sumter Counties.



Sept. 23, 2009
c:\HazMI2009\LeeWildfires1988-2008

Bishopville

Wildfires are not geographically specific, and can occur where there is a forested area in the City and can affect any of the City's adjoining assets. The urban areas are less vulnerable to wildfires, simply because of the fact that there is less vegetation.

Lynchburg

Wildfires are not geographically specific, and can occur where there is a forested area in the Town and can affect any of the Town's adjoining assets. The urban areas are less vulnerable to wildfires, simply because of the fact that there is less vegetation.

Table A-18
Lee County
Multi-jurisdiction Analysis of Wildfires

Jurisdictions	History	Vulnerability	Maximum Threat	Probability	Total Score	Jurisdiction Rating
Bishopville	10	50	50	35	145	3
Lynchburg	10	50	50	70	180	2
Unincorporated	20	50	100	70	240	1

*NCDC data for individual occurrences was not available; therefore, data was utilized from a county wide scale utilizing a land cover GIS Shapefile (see map 24). As such, scores for wildfires were determined from analysis of this information.

*See Appendix G for an explanation of the scoring system used for this table.

Those jurisdictions with the highest numerical scores should and will be receiving priority attention for planning and/or mitigation purposes.

TABLE A-19
Twenty Year Summary of Wildfires in Clarendon
County, By Number of Fires, Acres Consumed

Number of Fires	Acres Consumed
1,663	11,749

H. EARTHQUAKES**Description:**

An earthquake is the motion or trembling of the ground produced by sudden displacement of rock in the Earth's crust. Earthquakes result from crustal strain, volcanism, landslides, or the collapse of caverns. Earthquakes can affect hundreds of thousands of square kilometers; cause damage to property measured in the tens of billions of dollars; result in loss of life and injury to hundreds of thousands of persons; and disrupt the social and economic functioning of the affected area.

Most property damage and earthquake-related deaths are caused by the failure and collapse of structures due to **ground shaking**. The level of damage depends upon the amplitude and duration of the shaking, which are directly related to the earthquake size, distance from the fault, site and regional geology. Other damaging earthquake effects include **landslides**, the down-slope movement of soil and rock (mountain regions and along hillsides), and in which ground soil loses its ability to resist shear and flows much like quick sand. In the case of liquefaction, anything relying on the substrata for support can shift, tilt, rupture, or collapse.

Most earthquakes are caused by the release of stresses accumulated as a result of the rupture of rocks along opposing fault planes in the Earth's outer crust. These fault planes are typically found along borders of the earth's ten tectonic plates. These plate borders generally follow the outlines of the continents, with the North American plate following the continental border with the Pacific Ocean in the west, but following the mid-Atlantic trench in the east. As earthquakes occurring in the mid-ocean trench usually pose little threat to humans, the greatest earthquake threat in North America is along the Pacific coast.

The areas of greatest tectonic instability occur at the perimeters of the slowly moving plates, as these locations are subjected to the greatest strains from plates traveling in opposite directions and at different speeds. Deformation along plate boundaries causes strain in the rock and the consequent buildup of stored energy. When the built-up stress exceeds the rocks' strength, a rupture occurs. The rock on both sides of the fracture is snapped, releasing the stored energy and producing seismic waves, generating an earthquake.

Earthquakes are measured in terms of their magnitude and intensity. Magnitude is measured using the Richter Scale, an open-ended logarithmic scale that describes the energy release of an earthquake through a measure of shock wave amplitude. Each unit increase in magnitude on the Richter Scale corresponds to a ten-fold increase in wave amplitude, or a 32-fold increase in energy. Intensity is most commonly measured using the Modified Mercalli Intensity (MMI) Scale. It is a twelve-level scale based on direct and indirect measurements of seismic effects. The scale levels are typically described using roman numerals, with a I corresponding to imperceptible (instrumental) events, IV corresponding to moderate (felt by people awake), to XII for catastrophic (total destruction).

A detailed description of the Modified Mercalli Scale of Earthquake Intensity and its correspondence to the Richter Scale is given in **Table A-20**.

TABLE A-20
Modified Mercalli Intensity Scale for Earthquakes

Modified Mercalli Intensity Scale for Earthquakes	Scale Intensity Description of Effects	Corresponding Richter Scale Magnitude
I	Detected only on seismographs	< 3.5
II	Feeble; Some people feel it	3.5
III	Slightly felt by people resting; like a truck rumbling by	4.2
IV	Moderate - Felt by people walking	4.5
V	Slightly Strong - Sleepers awake; church bells ring	4.8
VI	Strong - Trees sway; suspended objects swing, objects fall off shelves	5.4
VII	Very Strong Mild Alarm; walls crack; plaster falls	6.1
VIII	Destructive - Moving cars uncontrollable; masonry fractures,	6.5

	poorly constructed buildings damaged	
IX	Ruinous - Some houses collapse; ground cracks; pipes break open	6.9
X	Disastrous - Ground cracks profusely; many buildings destroyed; liquefaction and landslides widespread	7.3
XI	Very Disastrous - Most buildings and bridges collapse; roads, railways, pipes and cables destroyed; general triggering of other hazards	8.1
XII	Catastrophic - Total destruction; trees fall; ground rises and falls in waves	>8.1

Historical Occurrences:

Earthquakes are relatively infrequent but not uncommon in South Carolina. From 1698 to 2001, 20 earthquakes occurred in South Carolina with a Richter Scale magnitude equal to or greater than 4. The most property damage in South Carolina ever attributed to an earthquake was caused by the August 31, 1886 Charleston, South Carolina shock. The quake left about 65 people dead in Charleston.

Lee County has very little history with earthquakes. There has been 1 historical epicenter recorded within Lee County between 1698 and 2001. **Map 10** shows the location of this earthquake.

Table A-21
Earthquakes in Sumter County (1843-2009)

2/18/2000	2.43 Magnitude
-----------	----------------

Figure A-3 shows the peak acceleration (%g) with 10% Probability of Exceedance in 50 years for the central and east coast of the United States (U.S. Geological Survey, National Seismic Hazard Mapping Project, 1996). Lee County is located in an area with less than 10%g (peak acceleration), which means it faces low seismic risk.

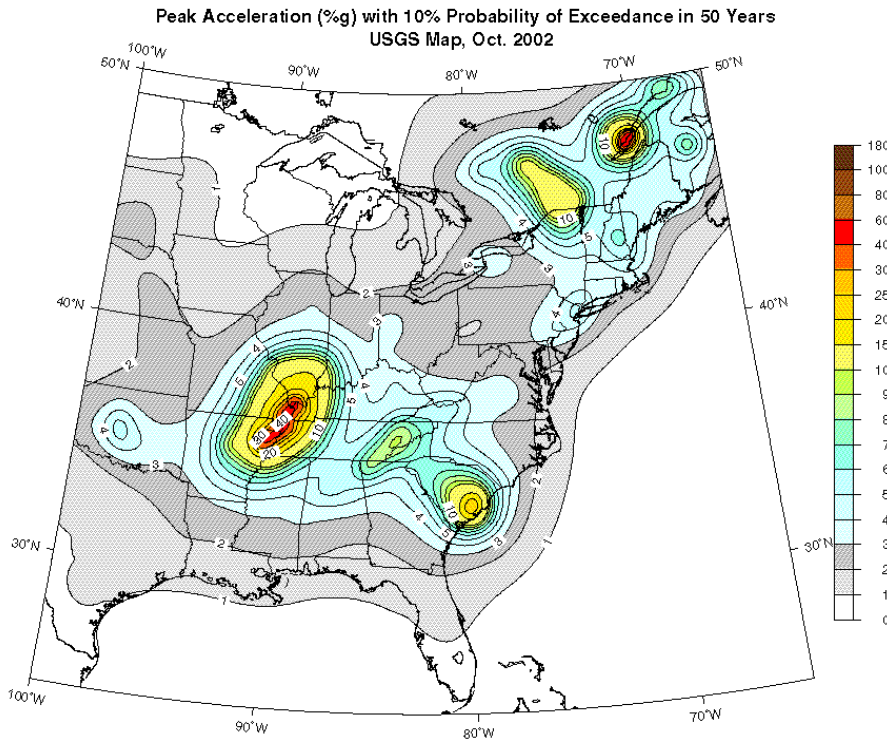


FIGURE A-3
Peak Acceleration (%g) with 10% Probability of Exceedance in 50 Years *Source: United States Geological Survey*

Table A-22
Hazard Probability

	Events	Years	Recurrence Interval	% Chance/Year
Earthquake	1	307	307	0.33%

Earthquake Occurrences in Lee County since 2002

There are no events reported between December 1, 2002 and May 31, 2009

Multi-jurisdictional Occurrences:

Lee


Given that there has only been one earthquake in Lee County, the area where it occurred is the only that can be considered at risk. The assets in this area include some dams for the Lynches River and the Turkey Creek Fire Station.

Bishopville

According to the historical data, Bishopville is at a minimum level of risk, so its assets are not particularly threatened.

Lynchburg

According to the historical data, Lynchburg is at a minimum level of risk, so its assets are not particularly threatened.

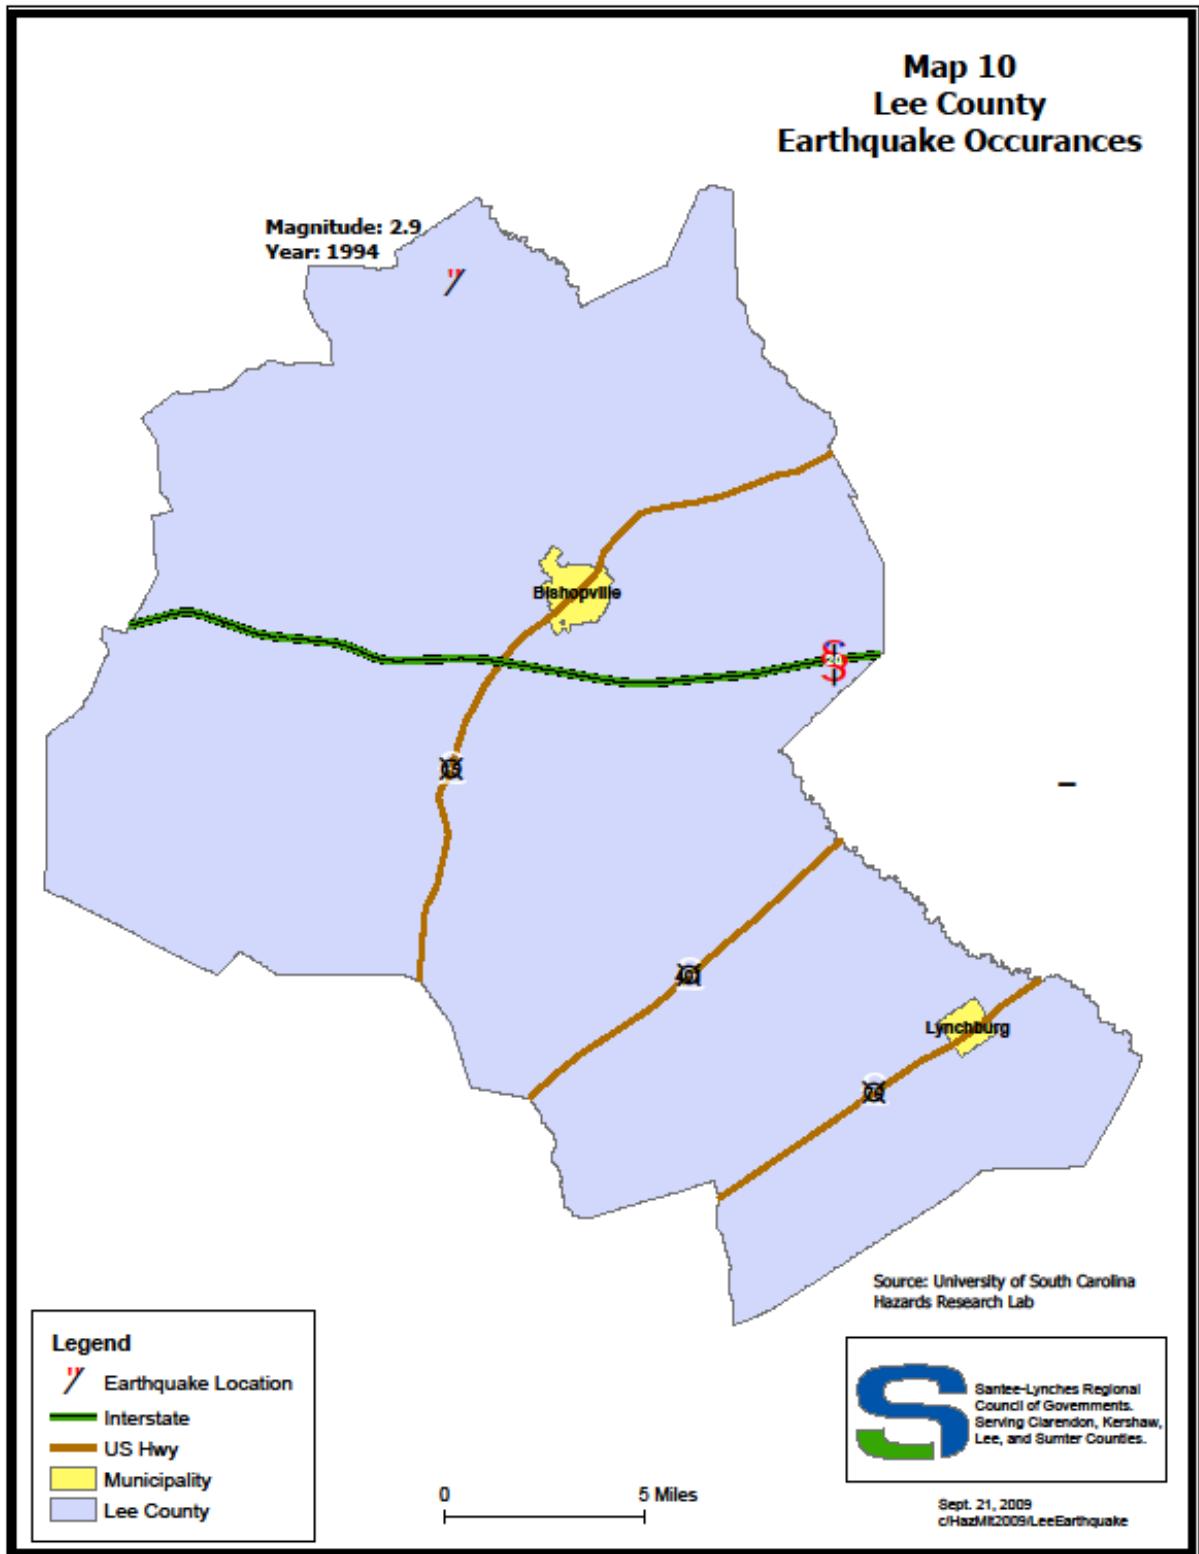

I. Drought

Description:

A simple definition of a drought is a period of prolonged dryness. However, a drought can have a wide range of impact that can affect a population in regards to the resulting water shortage that affects some activity, group, or environmental sector. Drought should be considered relative to some long-term average condition of balance between precipitation and evapotranspiration (i.e., evaporation + transpiration) in a particular area, a condition often perceived as “normal”. It is also related to the timing (i.e., principal season of occurrence, delays in the start of the rainy season, occurrence of rains in relation to principal crop growth stages) and the effectiveness (i.e., rainfall intensity, number of rainfall events) of the rains. Other climatic factors such as high temperature, high wind, and low relative humidity are often associated with it in many regions of the world and can significantly aggravate its severity.

To better understand droughts, it can be useful to sub-classify them into the following groups:

- **Agricultural Drought**, defined by soil moisture deficiencies
- **Hydrological Drought**, defined by declining surface and groundwater supplies
- **Meteorological Drought**, defined by a lack of precipitation
- **Hydrological Drought & Land Use**, defined by a meteorological drought in one area that has hydrological drought impact in another area
- **Socioeconomic Drought**, defined as drought that impacts supply and demand of some economic activity

Source: The National Drought Mitigation Center

Meteorological Drought

Meteorological drought is defined usually on the basis of the degree of dryness (in comparison to some “normal” or average amount) and the duration of the dry period. Definitions of meteorological drought must be considered as region specific since the atmospheric conditions that result in deficiencies of precipitation are highly variable from region to region. For example, some definitions of meteorological drought identify periods of drought on the basis of the number of days with precipitation less than some specified threshold. This measure is only appropriate for regions characterized by a year-round precipitation regime such as a tropical rainforest, humid subtropical climate, or humid mid-latitude climate.

Agricultural Drought

Agricultural drought links various characteristics of meteorological (or hydrological) drought to agricultural impacts, focusing on precipitation shortages, differences between actual and potential evapotranspiration, soil water deficits, reduced ground water or reservoir levels, and so forth. Plant water demand depends on prevailing weather conditions, biological characteristics of the specific plant, its stage of growth, and the physical and biological properties of the soil. A good definition of agricultural drought should be able to account for the variable susceptibility of crops during different stages of crop development, from emergence to maturity. Deficient topsoil moisture at planting may hinder germination, leading to low plant populations per hectare and a reduction of final yield. However, if topsoil moisture is sufficient for early growth requirements, deficiencies in subsoil moisture at this early stage may not affect final yield if subsoil moisture is replenished as the growing season progresses or if rainfall meets plant water needs.

Hydrological Drought

Hydrological drought is associated with the effects of periods of precipitation (including snowfall) shortfalls on surface or subsurface water supply (i.e., streamflow, reservoir and lake levels, ground water). The frequency and severity of hydrological drought is often defined on a watershed or river basin scale. Although all droughts originate with a deficiency of precipitation, hydrologists are more concerned with how this deficiency plays out through the hydrologic system. Hydrological droughts are usually out of phase with or lag the occurrence of meteorological and agricultural droughts. It takes longer for precipitation deficiencies to show up in components of the hydrological system such as soil moisture, streamflow, and ground water and reservoir levels. As a result, these impacts are out of phase with impacts in other economic sectors. For example, a precipitation deficiency may result in a rapid depletion of soil moisture that is almost immediately discernible to agriculturalists, but the impact of this deficiency on reservoir levels may not affect hydroelectric power production or recreational uses for many months. Also, water in hydrologic storage systems (e.g., reservoirs, rivers) is often used for multiple and competing purposes (e.g., flood control, irrigation, recreation, navigation, hydropower, wildlife habitat), further complicating the sequence and quantification of impacts. Competition for water in these storage systems escalates during drought and conflicts between water users increase significantly.


Hydrological Drought and Land Use

Although climate is a primary contributor to hydrological drought, other factors such as changes in land use (e.g., deforestation), land degradation, and the construction of dams all affect the hydrological characteristics of the basin. Because regions are interconnected by hydrologic systems, the impact of meteorological drought may extend well beyond the borders of the precipitation-deficient area. Land use change is one of the ways human actions alter the frequency of water shortage even when no change in the frequency of meteorological drought has been observed.

Socioeconomic Drought

Socioeconomic definitions of drought associate the supply and demand of some economic good with elements of meteorological, hydrological, and agricultural drought. It differs from the aforementioned types of drought because its occurrence depends on the time and space processes of supply and demand to identify or classify droughts. The supply of many economic goods, such as water, forage, food grains, fish, and hydroelectric power, depends on weather. Because of the natural variability of climate, water supply is ample in some years but unable to meet human and environmental needs in other years. Socioeconomic drought occurs when the demand for an economic good exceeds supply as a result of a weather-related shortfall in water supply.

Figure A-4 shows how climatic factors interact with one another and contribute to drought conditions, which can impact social, environmental, and social conditions.

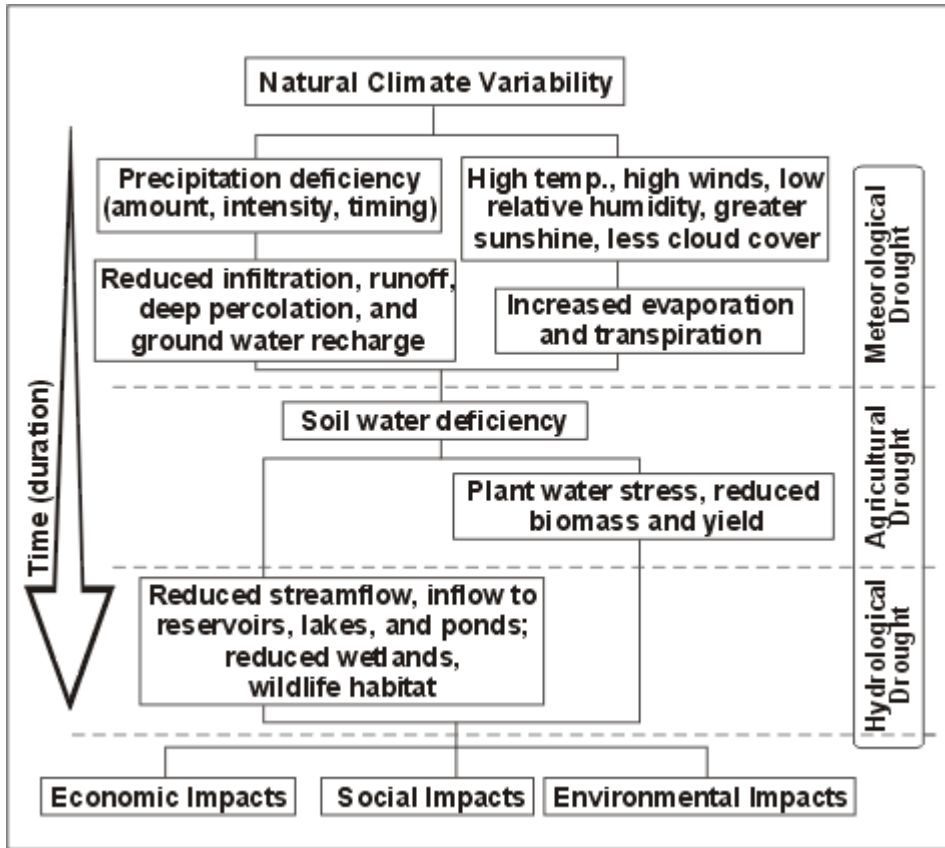

Source: The National Drought Mitigation Center

The most commonly used indicator of drought and drought severity is the **Palmer Drought Severity Index (PDSI)**, which is published jointly by the National Oceanic and Atmospheric Administration (NOAA) and the US Department of Agriculture (USDA). The PDSI measures the difference between water supply (in terms of precipitation and stored soil moisture) and demand (the amount of water required to recharge soil and keep rivers, lakes, and reservoirs at normal levels). The result is a scale from +4 to -4, at 1.0 and 0.5 intervals. See **Table A-23** for a detailed description of the PDSI.

Table A-23
Palmer Drought Severity Index (PDSI)

Scale	Description
Above 4.0	extremely wet
3.0 to 3.99	very wet
2.0 to 2.99	moderately wet
1.0 to 1.99	slightly wet
0.5 to 0.99	incipient wet spell
0.49 to -0.49	near normal conditions
-0.5 to -0.99	incipient dry spell
-1.0 to -1.99	mild drought

-2.0 to -2.99	moderate drought
-3.0 to -3.99	severe drought
-4.0 or less	extreme drought

Measuring Severity of Drought

Keetch-Byram Drought Index. A soil/duff drought index that ranges from 0 (no drought) to 800 (extreme drought) and is based on 8 inches of available moisture in the upper soil layers that can be used by vegetation for evapotranspiration. The index indicates deficit inches of available water in the soil. A KBDI reading of 450 means there is a deficit of 4.5 inches of ground water available to the vegetation. Factors in the index are maximum daily temperature, daily precipitation, antecedent precipitation, and annual precipitation.

TABLE A-24
Keetch-Byram Drought Index (KBDI)

Index	Description
0-150	The fuels and ground are quite moist. Drying is generally limited to the fine surface fuels and the organic layers retain sufficient moisture to resist burning. Most of the heavy fuels (100 and 1000 hour) are to wet to ignite. Typical of spring dormant season following winter precipitation.
150-300	Scattered parches of surface litter remain in damp areas following a fire, and the organic layer remains basically undisturbed. Both pine and hardwood stumps may ignite, but seldom burn below ground. Snags a major threat for potential fire escape. Spotting usually minimal. Large acreages (500+) ignited can create intense conditions. Fire behavior is predictable. Typical of late spring, early growing season.
300-500	Fire consumes most surface litter along with a significant loss in organic soil material. Site preparation burns expose mineral soil, producing areas causing erosion problems. 100 and 1000 hour fuels contribute to fire intensity. Stumps and snags ignite. Spotting occurs. Escaped fire is difficult to control. Fire behavior is still predictable. Increased mop-up and petrol activities are required. This is typical in the late spring, early growing season at a K/B level below 400 KBDI. Above 400 KBDI, typical of late summer, early fall.
500-700	All surface litter and most of the organic layer are consumed by fire leaving excessive site damage. 1000 hour fuels contribute readily to fire intensity. Spotting is difficult to control. Above 600 KBDI, fire suppression is a major problem. Expect fire escape the next day. Summer site preparations should be canceled when the KBDI surpasses 550. Near 700, understory vegetation wilts and is consumed by fire. Fire behavior is predictable, but often unpredicted. Extensive mop-up to fire suppression. The levels above 600 are associated with severe drought
700 Plus	Expect the same as the previous levels, only worse! Extreme fire behavior. Delay burning until the K/B index falls below 500

Source: South Carolina Drought Response Unit of the Department of Natural Resources

Historical Occurrences:

The state has high inter-annual and seasonal variability's of precipitation. The main cause of this is the strength and geographic placement of the Bermuda High Pressure System. As the high pressure continues its grip over the area, solar radiation increases, which in turn increases the temperature, which then decreases the cloud cover, thereby reducing the probability of substantial precipitation.

Droughts are sometimes alleviated by a tropical cyclone. During 1954 Hurricane Hazel ended an extreme drought in eastern South Carolina, although drought conditions

continued in western sections. In 1990, the remnants of Hurricane Klaus and Tropical Storm Marco ended an extreme drought.

Precipitation occurs during periods of drought, however, it is highly localized, inconsequential, and generally evaporates within 24-hours after falling. Periods of insufficient rainfall for crop growth occur during some summers. There is approximately a one in four probability of a drought somewhere in South Carolina at any time (Guttman and Plantico, 1987). Field crops such as corn, cotton, and soybeans are greatly stressed when drought conditions extend over several weeks during the growing season because only 9% of all farms in the state have irrigated acres, as compared to 26% nationwide. However, the state has a similar proportion of irrigated acres when compared to Alabama, North Carolina, and Virginia. Only Florida and Georgia have higher percentages of irrigated land in the Southeast United States (U.S. Department of Commerce, 1993).

Severe Droughts have been documented at intervals of roughly every thirty years, with some exceptions, since the early 19th Century. Documented severe droughts have occurred statewide in 1818, 1845, 1890, 1925, 1933, 1954, 1977, 1983, 1986, 1988, 1990, and 1993. According to the University of South Carolina Hazards Research Lab, Lee experienced two significant droughts for a combined 62 days from 1993 to 2001. **Map 11** shows how many droughts occurred in South Carolina Counties during this eight-year period. Located in the central part of the state, which experienced the fewest number of droughts, Lee did not endure the same amount of droughts experienced by the Upstate and Low Country areas of South Carolina.

**Table A-25
Hazard Probability**

	Events	Years	Recurrence Interval	% Chance/Year
Drought	1	59	59	1.69

Drought Occurrences in Lee County since 2002

There have been no events reported between December 1, 2002 and May 31, 2009.

Multi-jurisdictional Occurrences:

Lee


Drought, by its definition, primarily affects agriculture, and, if severe enough, water supplies. As such, the County's critical facilities are not at risk due to drought.

Bishopville

Drought, by its definition, primarily affects agriculture, and, if severe enough, water supplies. As such, the City's critical facilities are not at risk due to drought.

Lynchburg

Drought, by its definition, primarily affects agriculture, and, if severe enough, water supplies. As such, the Town's critical facilities are not at risk due to drought.

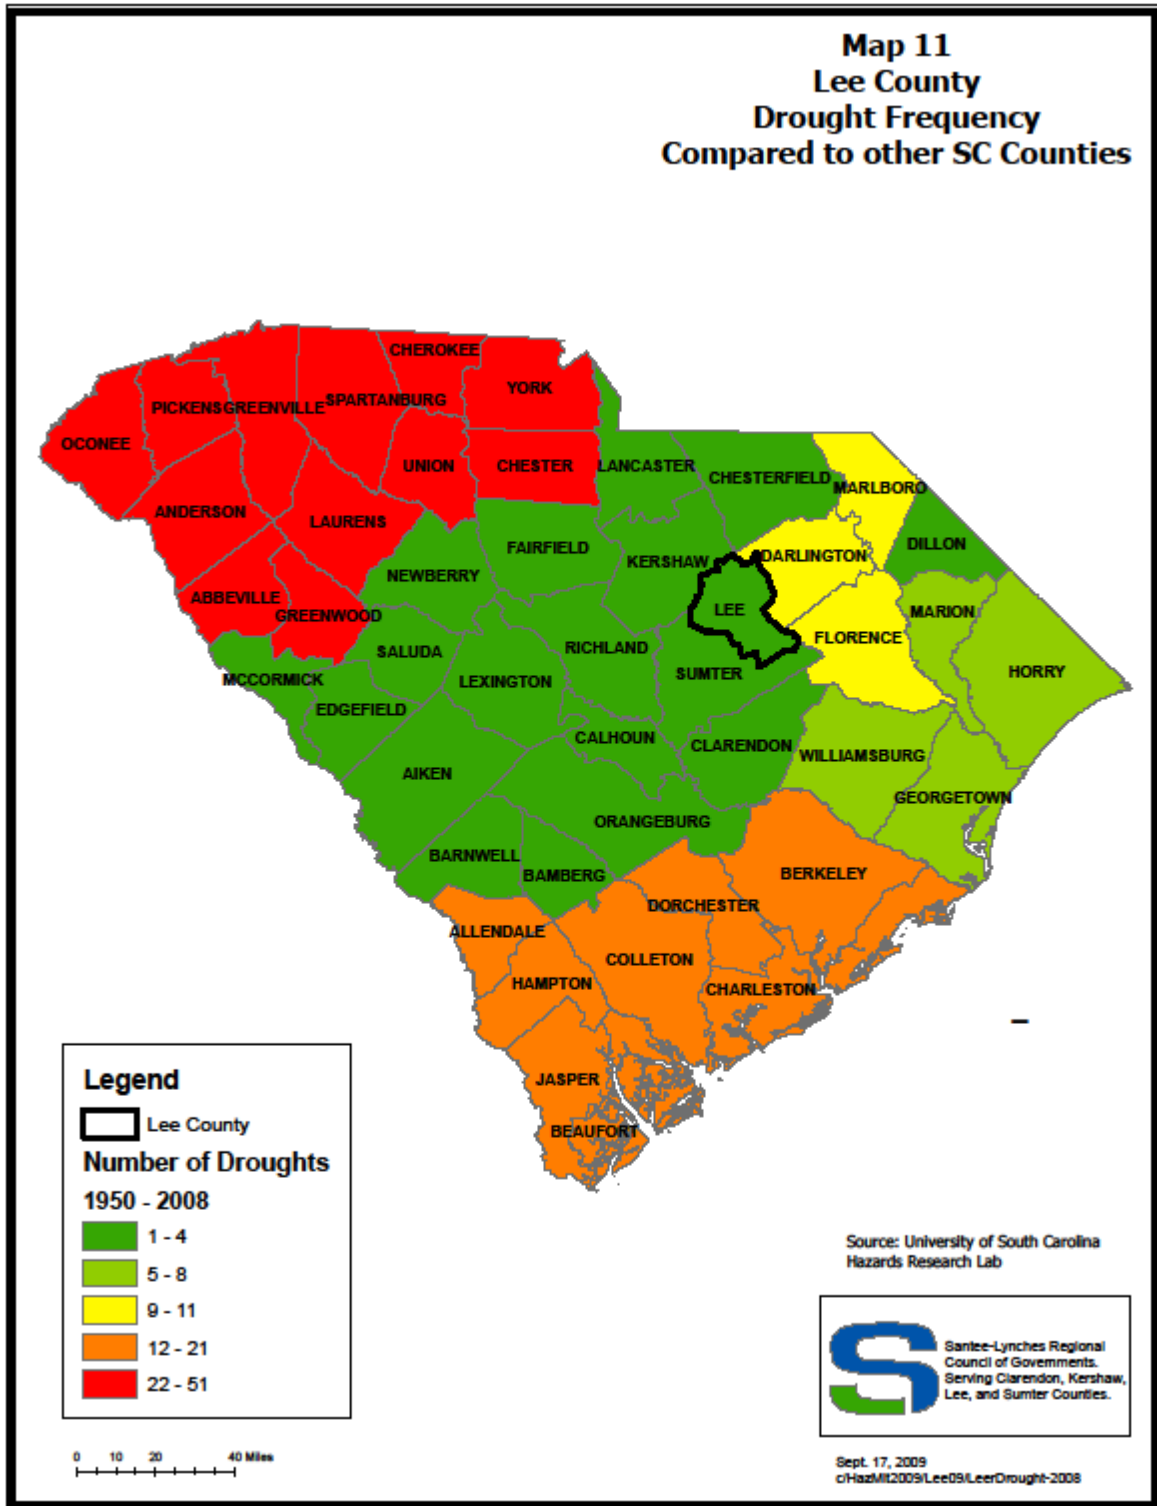

2. HAZARD PROFILE RISK INDEX

A. Social Vulnerability Index

In order to determine the **Social Vulnerability** of Lee County, the University of South Carolina Hazards Research Lab included the following statistics from the 2000 Census on the Block Group Level:

- **Under 18 Population**
- **Over 65 Population**
- **Female Population**
- **Nonwhite Population**
- **Total Population**
- **Number of Houses**
- **Number Rental Units**
- **Number of Mobile Homes**


Once these statistics were determined from the Census tables, ratios were calculated by dividing the demographic data found in a block group by the county total. For example, the **Under 18 Population** for a block group would be divided by the total **Under 18 Population** for the County. Once the ratios were determined for these categories for each block group, the University stipulated that a **Vulnerability Score** should be calculated to determine how the vulnerable populations compare at the block group level. This was done by dividing the ratio for a block group by the highest ratio in the county. From this calculation, a vulnerability score was determined for each population segment for each block group. In addition to the demographic data collected for the ratios, the following information was also collected for vulnerability score:

- **Value_Dif (the difference between the mean house value for the block group and the average mean house value for the county)**
- **Value_Abs (the absolute difference in the between the value_dif for the block group and maximum value_dif for the entire county)**
- **Value Vulnerability (the standardized vulnerability score based on house value)**

Once these **Vulnerability Scores** were determined, they were added together and the sum of these numbers were placed in a database field titled, **Social Vulnerability**. By adding these various factors, the block groups most vulnerable to hazards due to population density, at risk groups, and property values, could be displayed on a map.

Map 12 shows the **Social Vulnerability** score on a thematically shaded map of 2000 Census Block Groups within Lee County. The legend on the right indicates the range of the scores for the county.

The map displays, the most vulnerable block groups of the county are in the northern and south-western areas. Although these three Block Groups are very rural and do not contain the County's two municipalities, they have a number of demographic characteristics that make them highly vulnerable in terms of social characteristics. The primary reasons for this is that these areas have a large nonwhite population; a large number of the housing structures are mobile homes or renter occupied; and each Block Group has a considerable population that is 65 and older. As for the jurisdictions within the County, The City of Bishopville is comprised of several Block Groups that range from

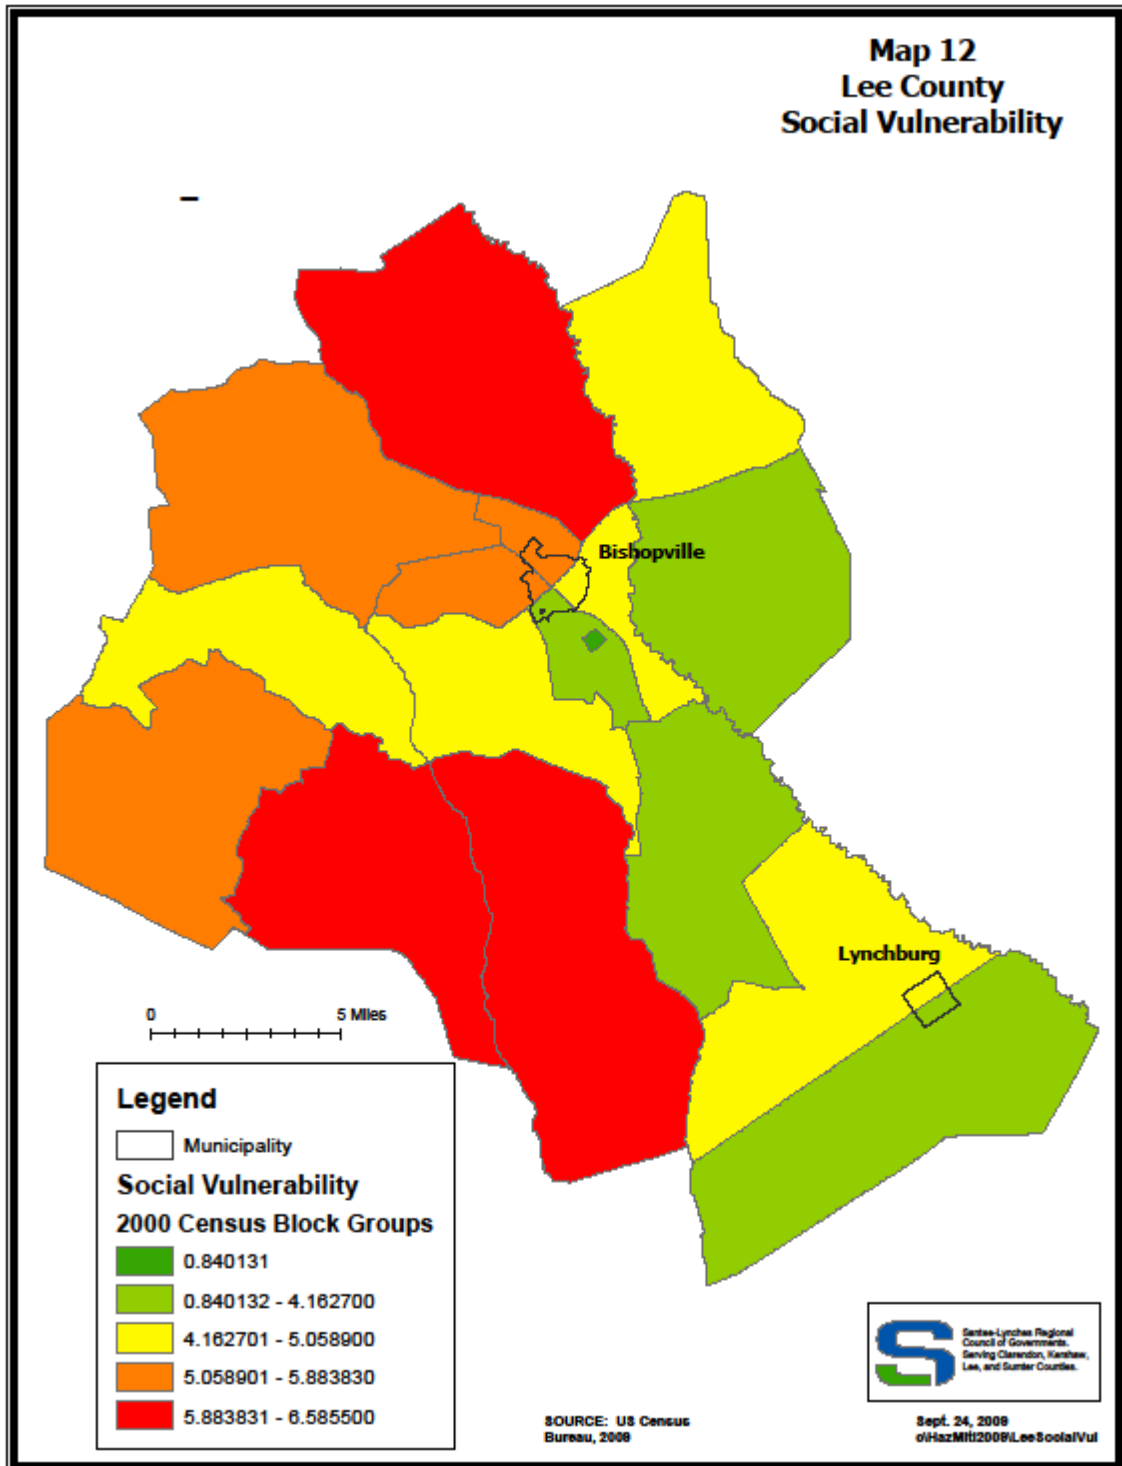

moderately high to low risk; on the other hand, the Town of Lynchburg is at a relatively low risk for social vulnerability. In the case of Bishopville, it is the most densely populated area in Lee County with considerable numbers of at-risk population demographics, such as persons classified as nonwhite and those over the age of 65. However, unlike the more rural areas of Lee County, which are more socially vulnerable, these Block Groups have more owner occupied housing with little or no mobile homes.

B. Natural Hazards Index

The procedures defined by the University of South Carolina Hazards Research Lab for conducting a risk assessment involved compiling data for the natural hazards listed in Section 1 of this Appendix. Certain data sets were only available at the county level, meaning that individual occurrences of these hazards were not referenced. These events included: Winter Storms, Wildfires, Severe Winds, Lightning, and Hail.

Once the hazards were identified, a **Frequency Ratio** was calculated using the following formula:

Frequency = # of events / # of years in record

These **Frequency Ratios** were added together to form a base number on which an overall hazard scoring system could be based. Since this information was not available below the county level, the hazard score was uniform throughout the county for these factors. However, the risk assessment did include data sets that would facilitate various portions of the county to differentiate from one another according to the historical instances of the following hazards: Flood Prone Areas, Hurricanes, Tornadoes, and Earthquakes.

Flood Prone Areas

Map 2 displays the Flood Prone Areas in the County. In the case of Lee County, this data was developed by the Santee-Lynches Regional Council of Governments to correspond and match with the Q3 (FEMA) data that was available in neighboring Sumter County. It was digitized utilizing existing hydro datasets obtained from the South Carolina Department of Natural Resources and topographic data from the USGS. In the overall hazard scoring, the areas most likely to flood were weighted equally to the maximum (grid) value of earthquakes and tornadoes. This number was chosen in order for those areas affected by flood to:

- Become visually distinct from the base county-wide frequency ratio
- Not be submerged by scores obtained by the procedures stipulated by the University of South Carolina Hazards Research Lab concerning Hurricanes, Tornadoes, and Earthquakes

Hurricanes

The University of South Carolina Hazards Research Lab provided Hurricane track data that geographically referenced the linear direction by which an eye of a Hurricane passed (see **Map 3**). From this information it was stipulated by the University that those tracks that passed within a 100 miles of the county be selected with the GIS software. Once these tracks were selected, a buffer was created that contained an attribute table that was coded according to the following values:

- Category 1 – 74 to 95 mph
- Category 2 – 96 to 110 mph

- Category 3 – 111 to 130 mph
- Category 4 – 131 to 155 mph
- Category 5 – 155 + mph
- Tropical Storms and Depressions accounted for all events with wind speeds less than 74 mph

Once these items were coded according to wind speed, a buffer distance needed to be established in order to show the area of impact for each storm. The buffer distance was determined to utilize the following values:

- Tropical Depression/Storm – 5 mile buffer on either side of the track
- Category 1 – 10 mile buffer
- Category 2 – 20 mile buffer
- Category 3 – 30 mile buffer
- Category 4 – 40 mile buffer
- Category 5 – 50 mile buffer

Once these buffers were established, they were clipped according to the county's boundaries (the area of the buffer that fell outside of the county was removed). Then, each category of hurricane (and tropical storm) was assigned a frequency ratio, using the same formula applied to the county wide hazard data.

Tornadoes


The University of South Carolina Hazards Research Lab provided point locations for the tornado hazards that occurred in the state. Once these points were brought into GIS, those points that occurred in Lee County were selected. Once these points were selected the tornado density was calculated utilizing a GIS Extension, called Spatial Analyst. Essentially, Spatial Analyst allows a user to create a grid (raster image) by the density or occurrence of points. In this example, it provides a gravity map (see **Map 13**) of tornadoes to add to the risk assessment. Once the density was established, the frequency ratio was applied to the density score of the gravity map.


Earthquakes

The procedure for earthquakes was identical to the methodology the University stipulated for tornadoes; and, as a result, a similar frequency ratio was produced. **Map 14** displays the Earthquake density that was used to help calculate the overall risk assessment.

Hazards Profile Index

Once all of the hazards identified by the University of South Carolina Hazards Research Lab were gathered and their corresponding frequency ratios calculated, a **Composite Hazards Map** was created to show the geographic relation to the combined threat that these hazards presented to the County. In order to combine these layers of information in a geographic format, yet retain all of the data, a series of "unions" (this operation is performed on two layers at a time) were performed on each layer representing a natural hazard. For the sake of definition, a union combines two GIS layers together into one feature, and the data contained in each layer (attributes) are retained in a combined database (attribute table). The most important aspect of this combining process is that as two polygon features are brought together and intersect one another, areas of overlap *will have attributes of both features*. This is the key concept to this methodology, because as the frequency ratios are added, the sum total will yield an overall composite

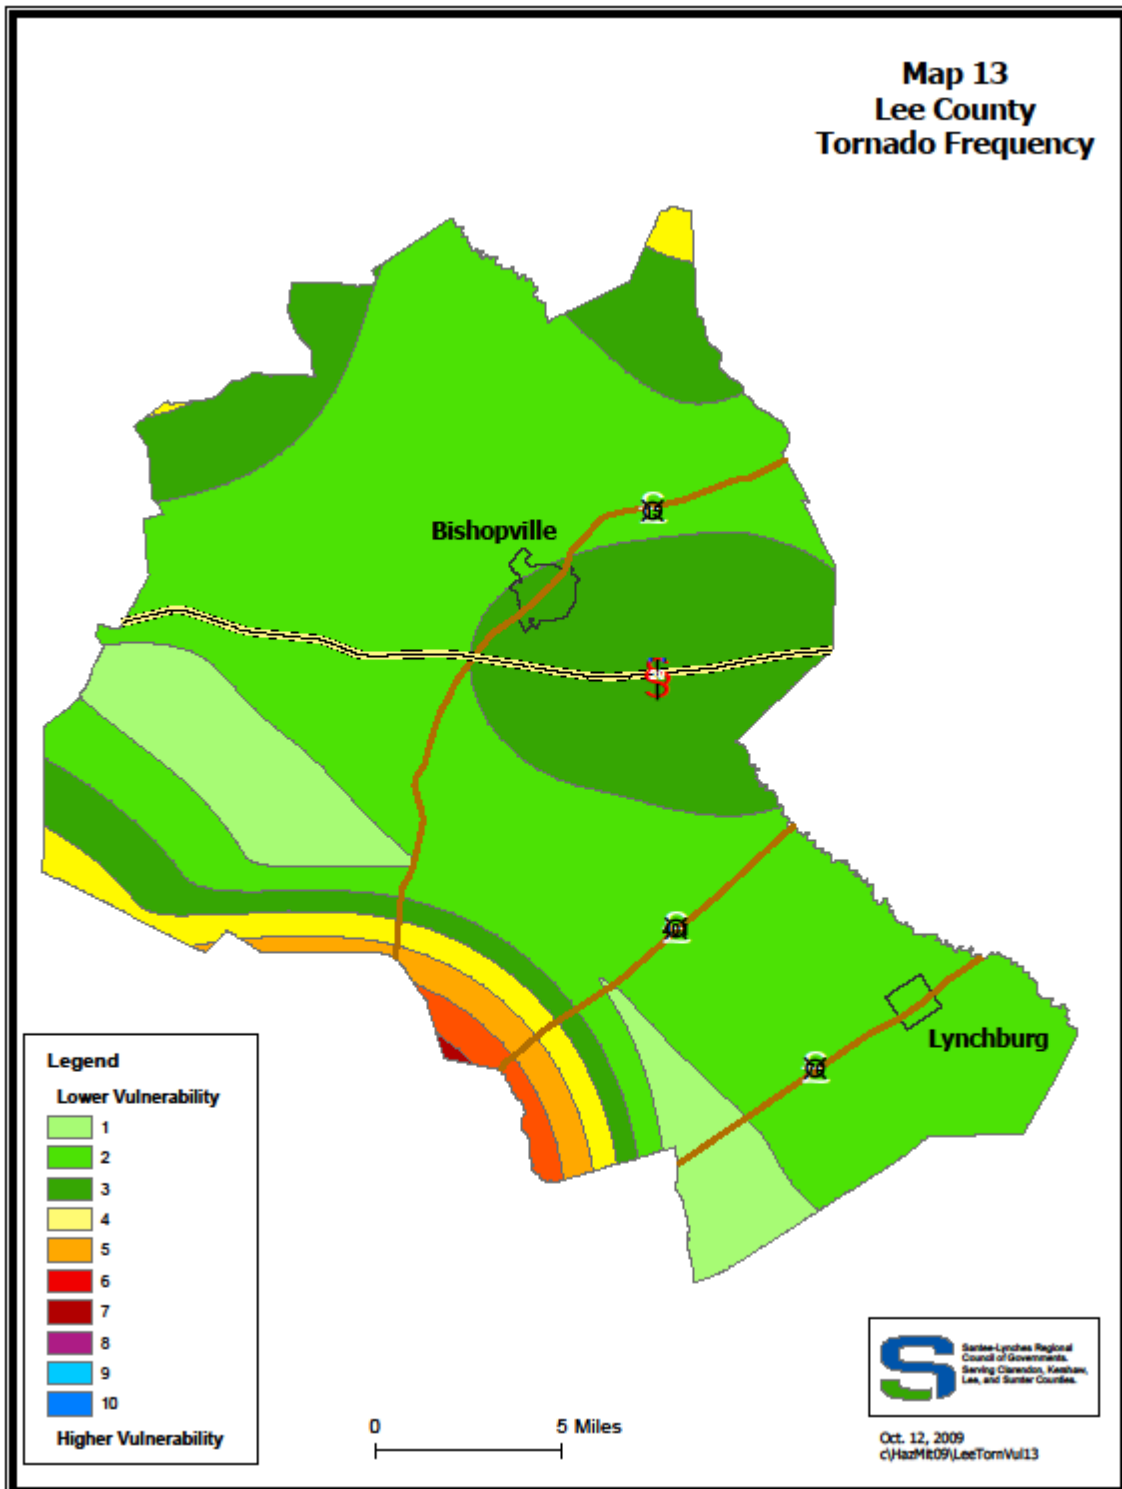

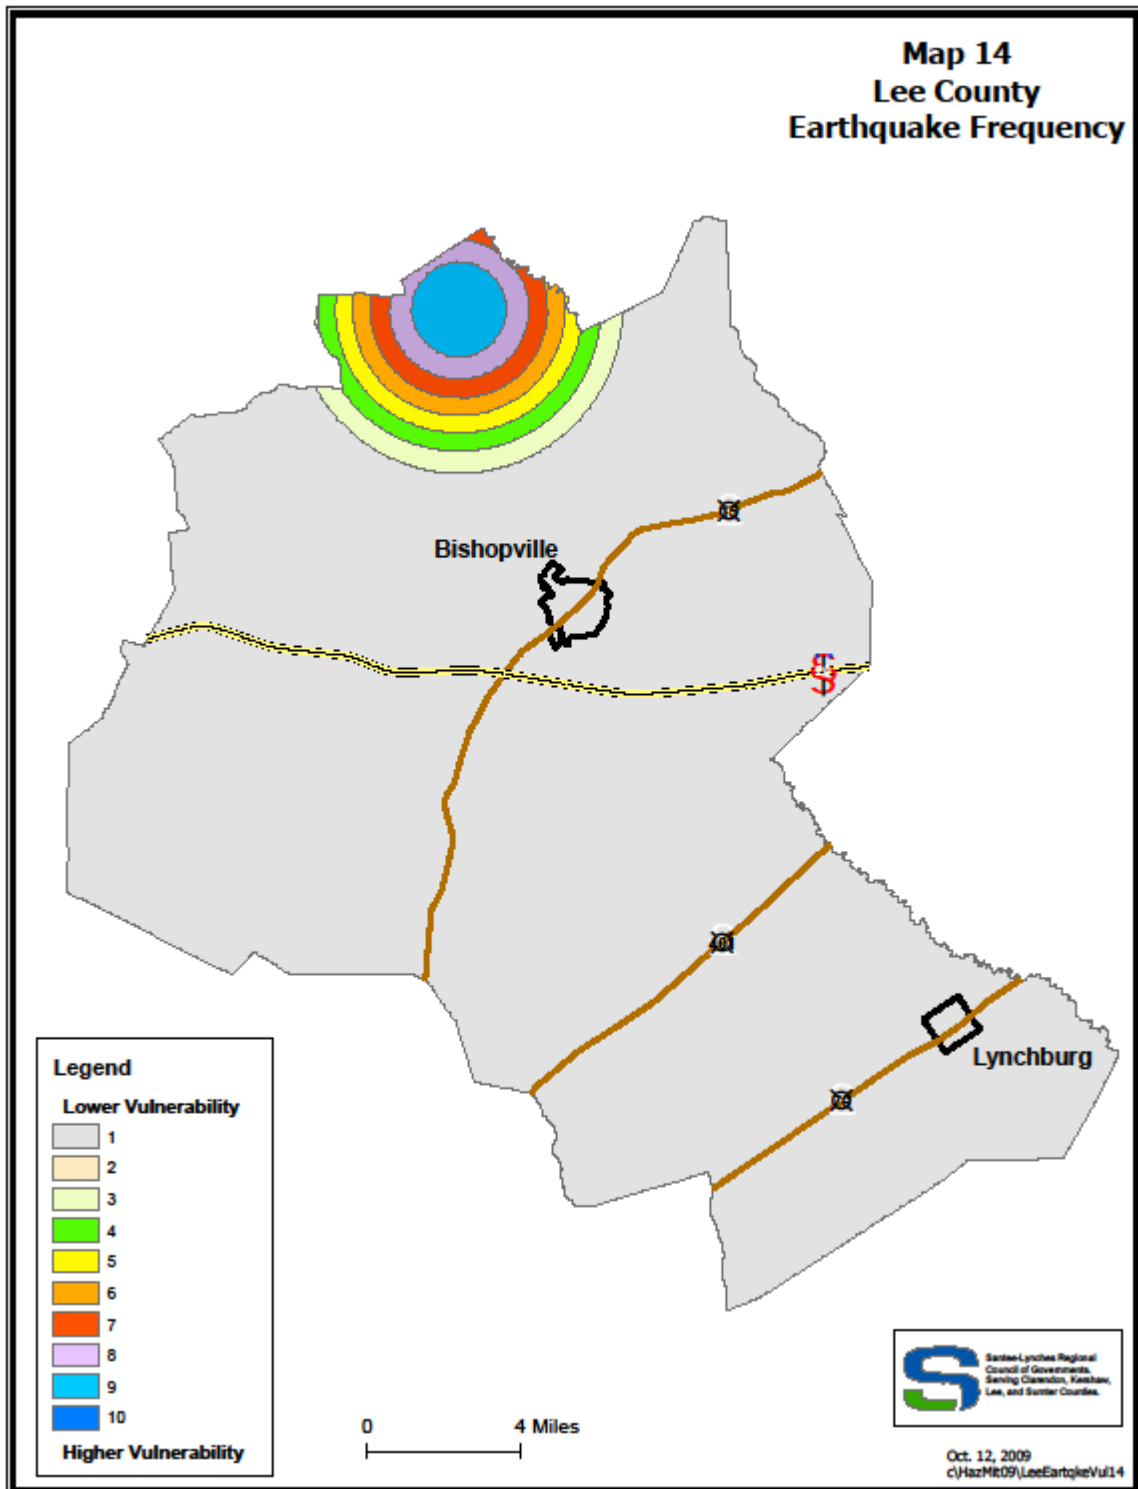

frequency score.

Map 15 is the sum result of this process for Lee County. As the map shows, the overall risk is a combination of the geographically specific hazards, and the map should be seen as a comparison between the different areas within the County. In the case of Lee County, the areas at the most risk due to historical occurrences of natural hazards are the following:


- The area around the City of Bishopville is at low risk. However, there is a significant area of risk due to flood prone areas around the Black River.
- The area around the town of Lynchburg is at low risk.
- The areas at most risk are in the northern end of the County due to historic earthquake activity and flood prone areas and the southwestern part of the county due to tornado activity and flood prone areas.


3. CONCLUSIONS ON HAZARD RISK

The final step in the University of South Carolina's procedures for risk assessment involved using the same GIS "union" procedure when combining the various hazards in order to obtain an overall composite frequency score (the sum of the frequency scores for all of the hazards listed in this Appendix). In this case, the GIS products created from the descriptions of the **Social Vulnerability Index** (section 2-A) and the **Natural Hazards Index** (section 2-B) are combined to form a **Combined Hazard Risk Assessment**.

Map 16 illustrates this union between social vulnerability and areas historically affected by hazards. In essence, this map merges this information, so that areas with both vulnerable populations and high incidences of natural hazards. In the case of Lee, the social data impacts the final map in the following ways:

- When the hazard and social indexes are combined, the overall risk vulnerability of the County increases. The Block Groups north of I-20 remain the most vulnerable areas in the county. This can primarily be attributed to the at risk population in those areas combined with flood prone areas and historic earthquake activity.
- The City of Bishopville increased in overall risk due to its demographic composition
- The Town of Lynchburg also increased in overall risk due to the population along US 76.

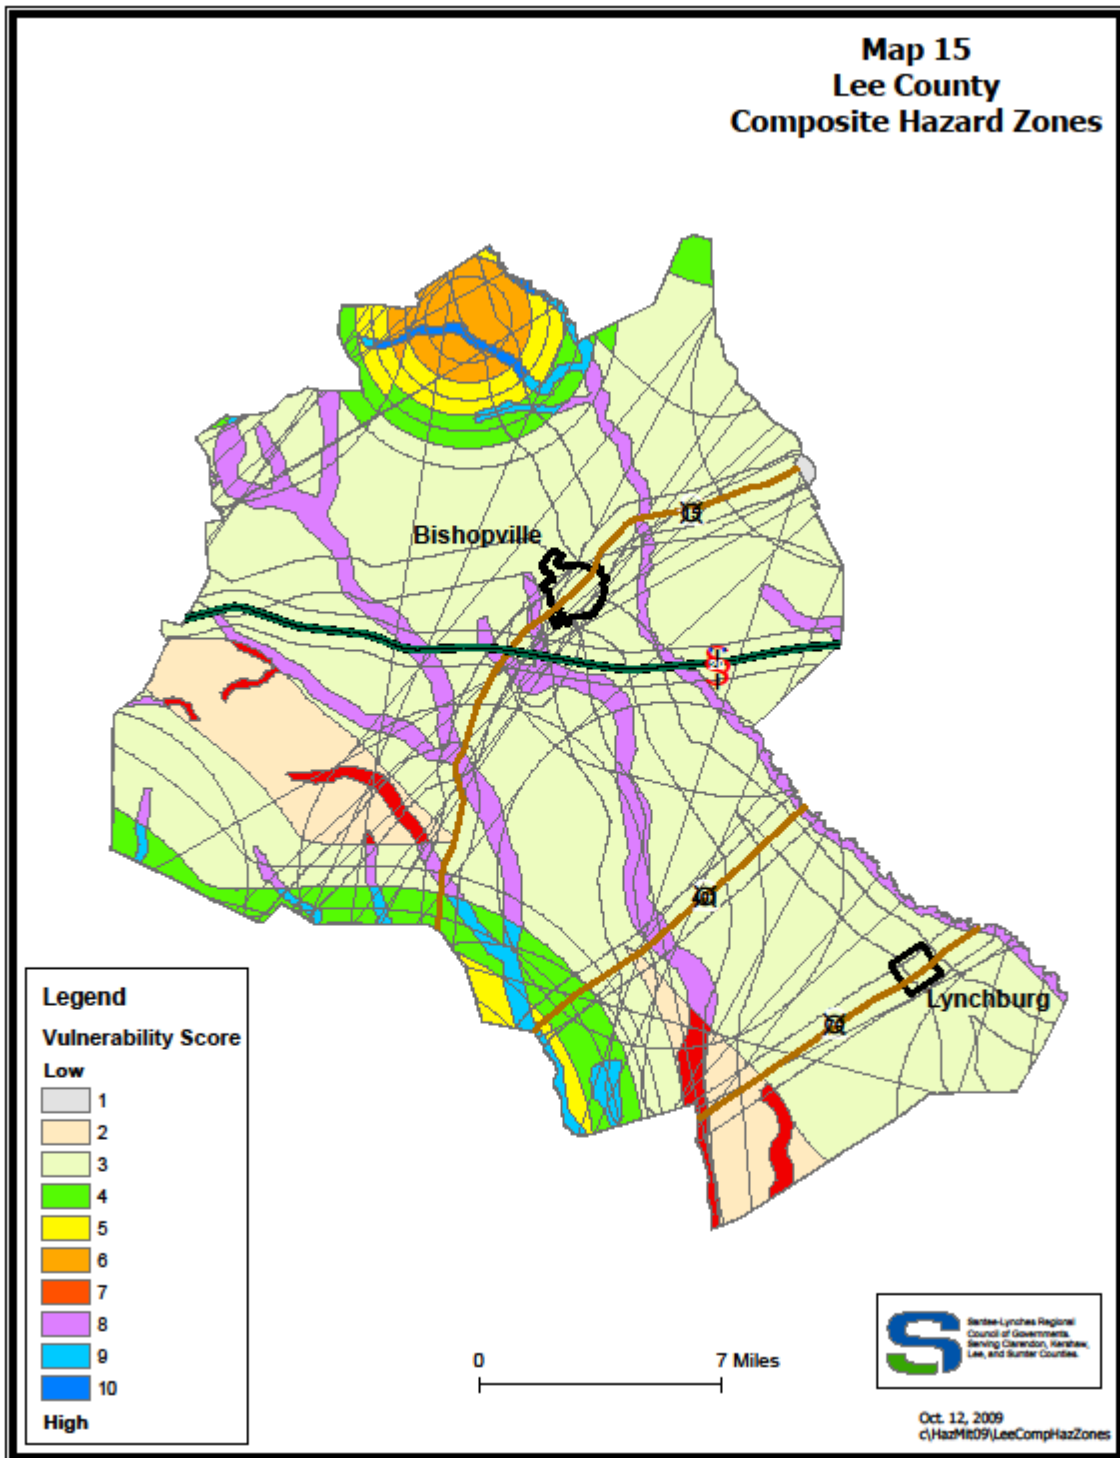

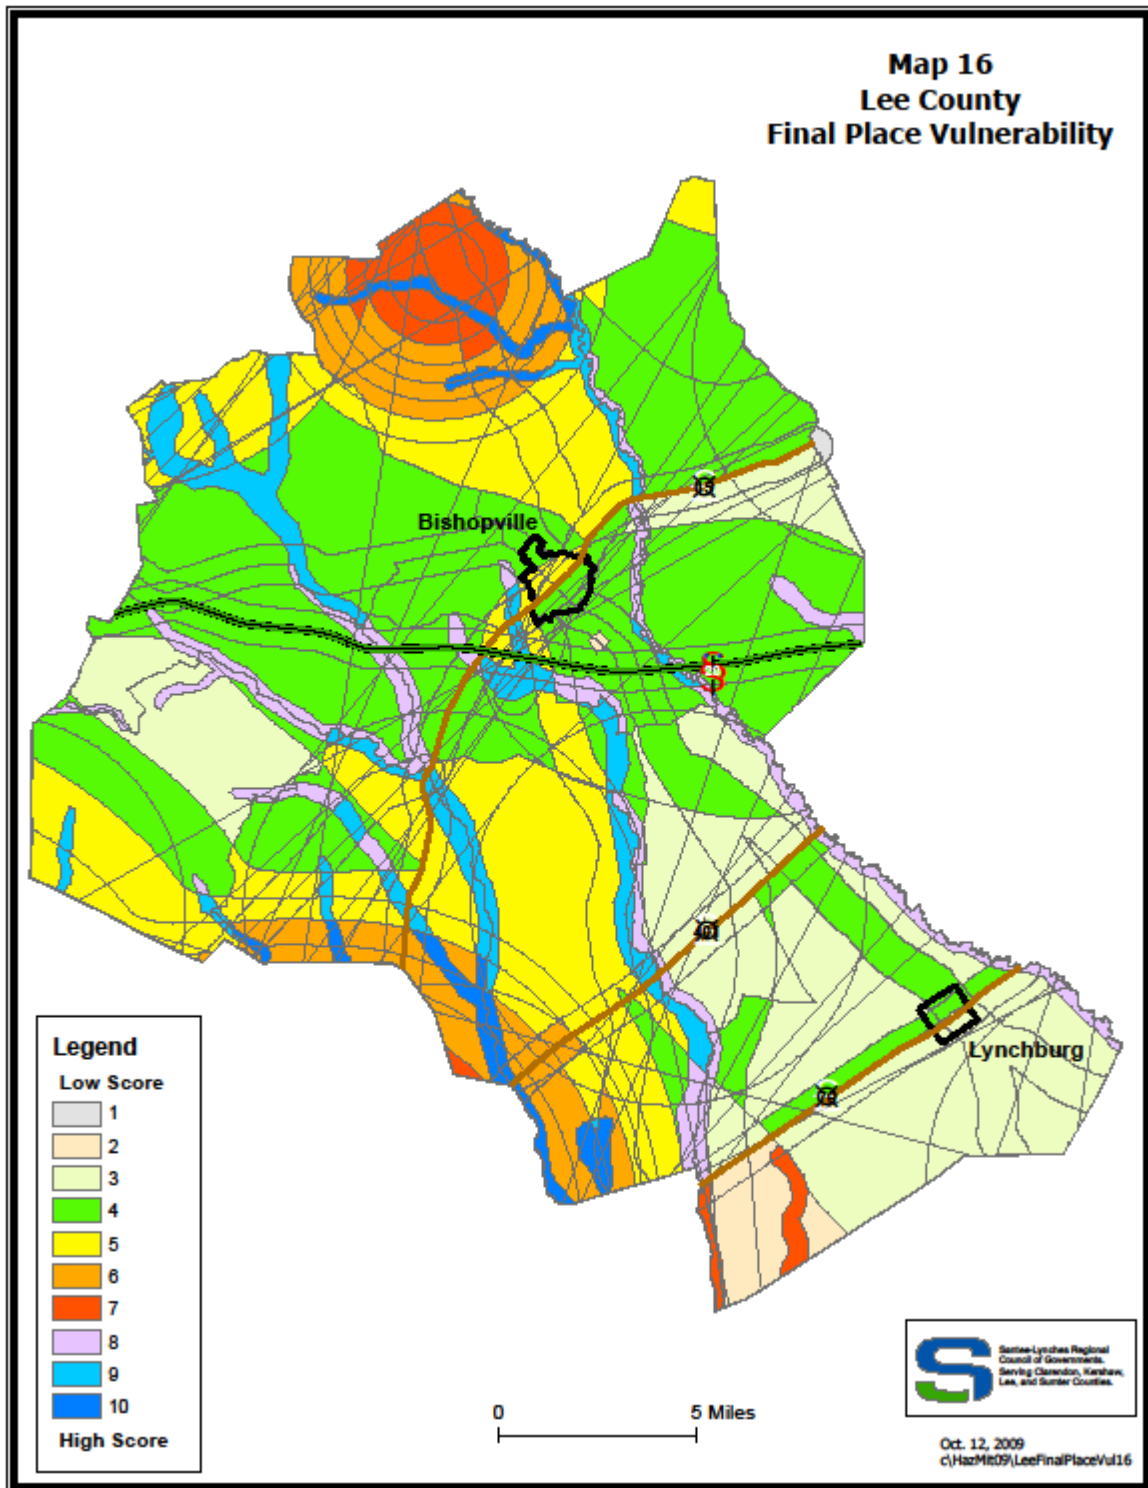

SECTION 8-2 CRITICAL FACILITY VULNERABILITY


This part of the Natural Hazard Mitigation Plan addresses the assets within the County and the critical facilities located within their boundaries. The University of South Carolina Hazards Lab compiled the initial critical facilities data with the criteria that these critical facilities are vital to the safety and well fare of the community. Thus, they are seen as essential for community survivability, along with the continuation of government and must remain operational or return to operation within 72 hours following a disaster. Also included were facilities that served at-risk or special needs populations, which would need to be addressed in the event of a disaster. The critical facilities include the following:


- Police Stations
- Hospitals/Medical Clinics
- Emergency Shelters
- Fire Stations
- Dams
- Communication Facilities
- Schools
- Residential Care Facilities
- Daycare Centers
- Transportation Infrastructure
- Electric, Water, and Wastewater Utilities


Once SLRCOG received the critical facility data from the University it was reviewed by SLRCOG staff to ensure accuracy, and SLRCOG added data from their own GIS database in order for the information to be complete. Furthermore, the information was presented in a public meeting for general input and comments. A complete list of these critical facilities is included with this section of the plan.


Along with critical facilities list, a series of maps were created to display the geographic location of these facilities within the County. These maps are included at the end of this section.


- Map #17 (Critical Facilities) shows the geographic location of those structures whose proper function are considered to be essential.
- Map #18 (Special Needs Population) maps out the various structures that serve at-risk population and need special consideration in terms of emergency response.
- Map #19 (Critical Infrastructure: Transportation Systems) includes County assets essential for evacuation and community access to critical facilities.
- Map #20 (Critical Infrastructure: Electric Power Utilities) shows the County's electric power distribution system.
- Map #21 (Critical Infrastructure: Water Utilities) provides locations for the County's water lines and water storage facilities.
- Map #22 (Critical Infrastructure: Wastewater Utilities) provides locations for the County's sewer lines, and wastewater treatment plants.

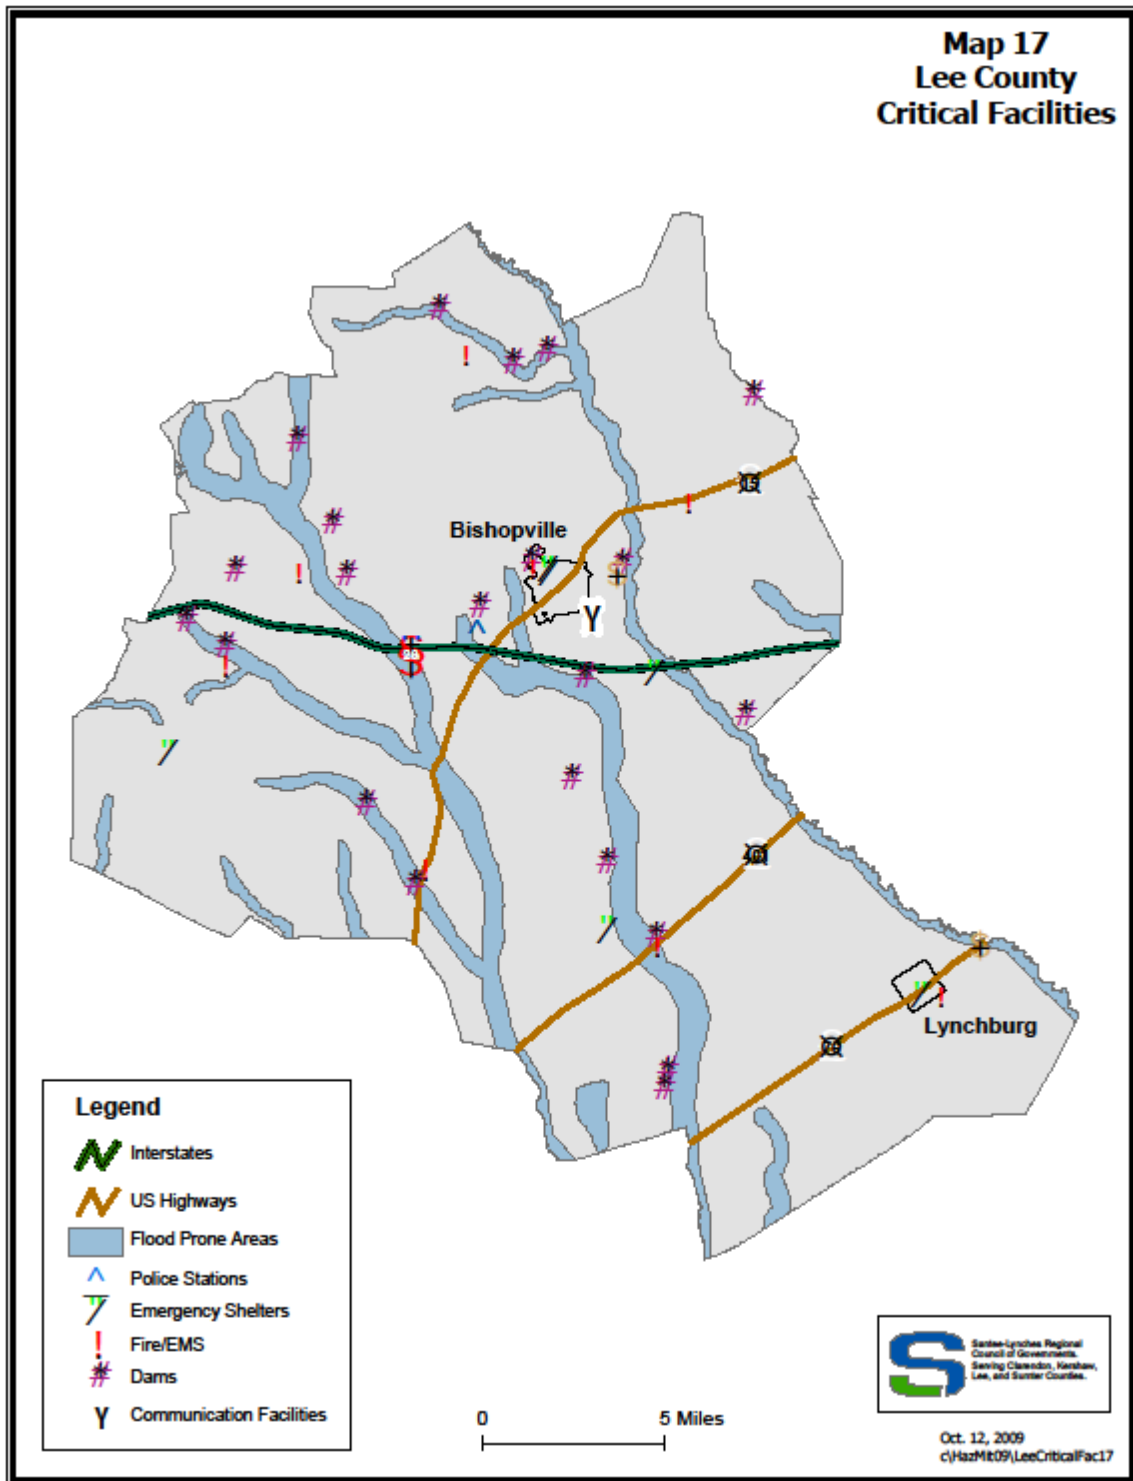


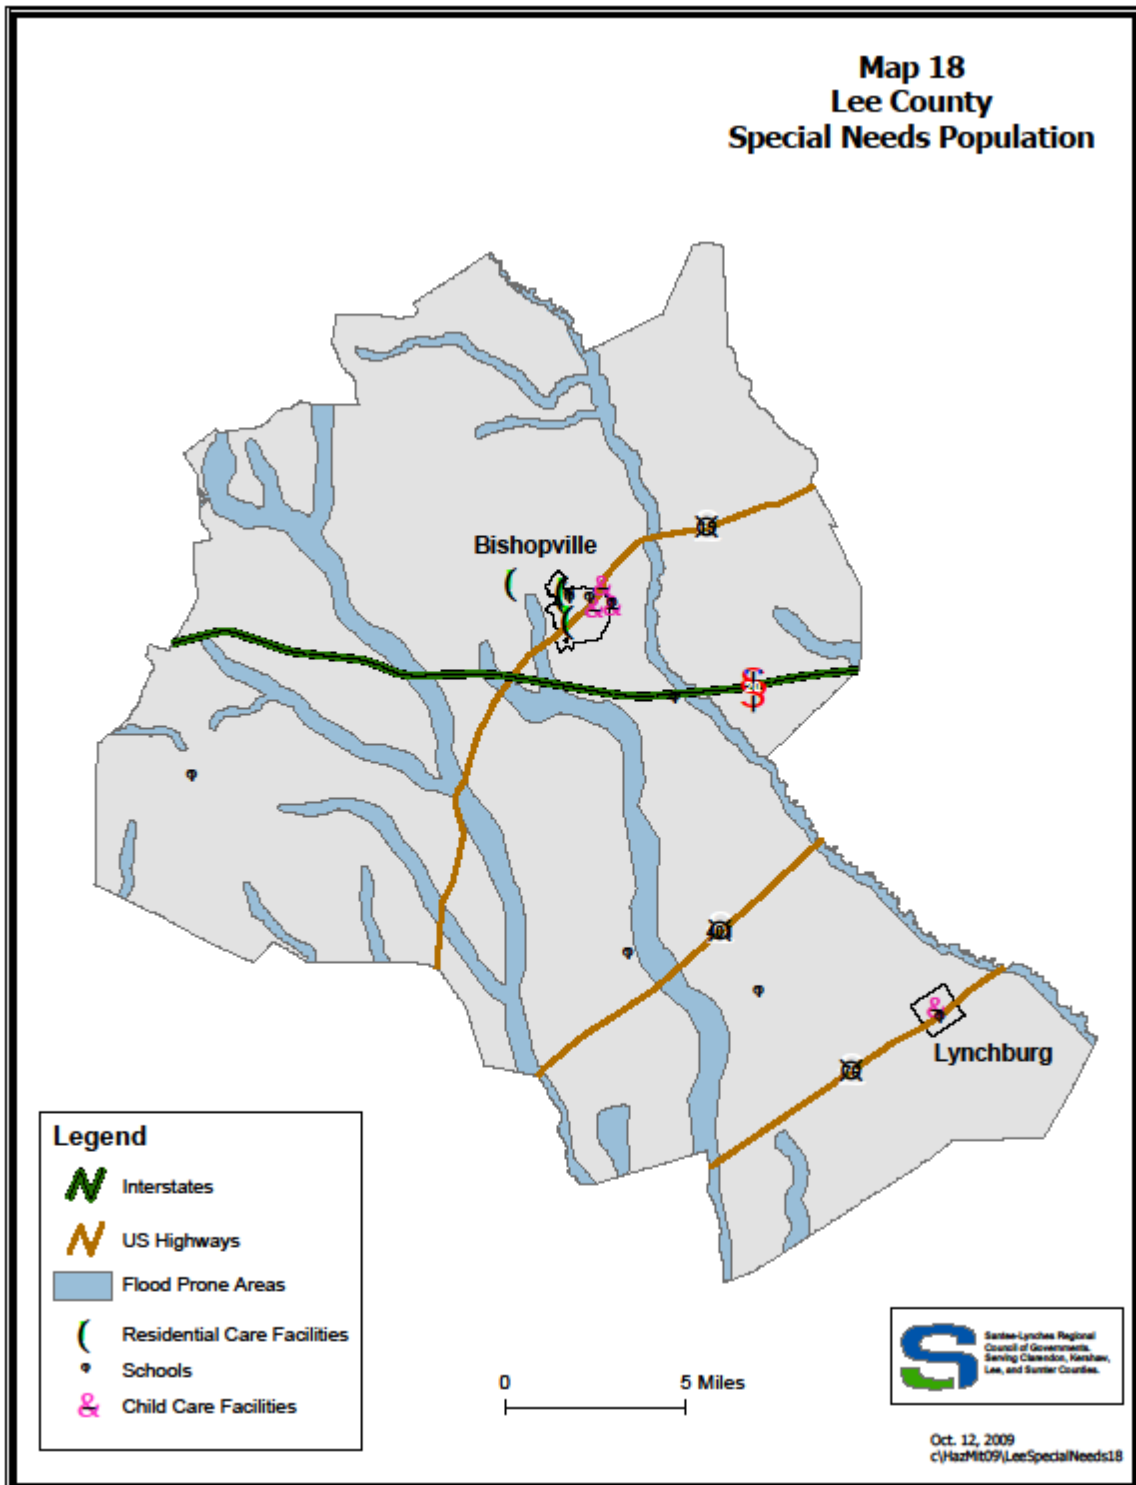

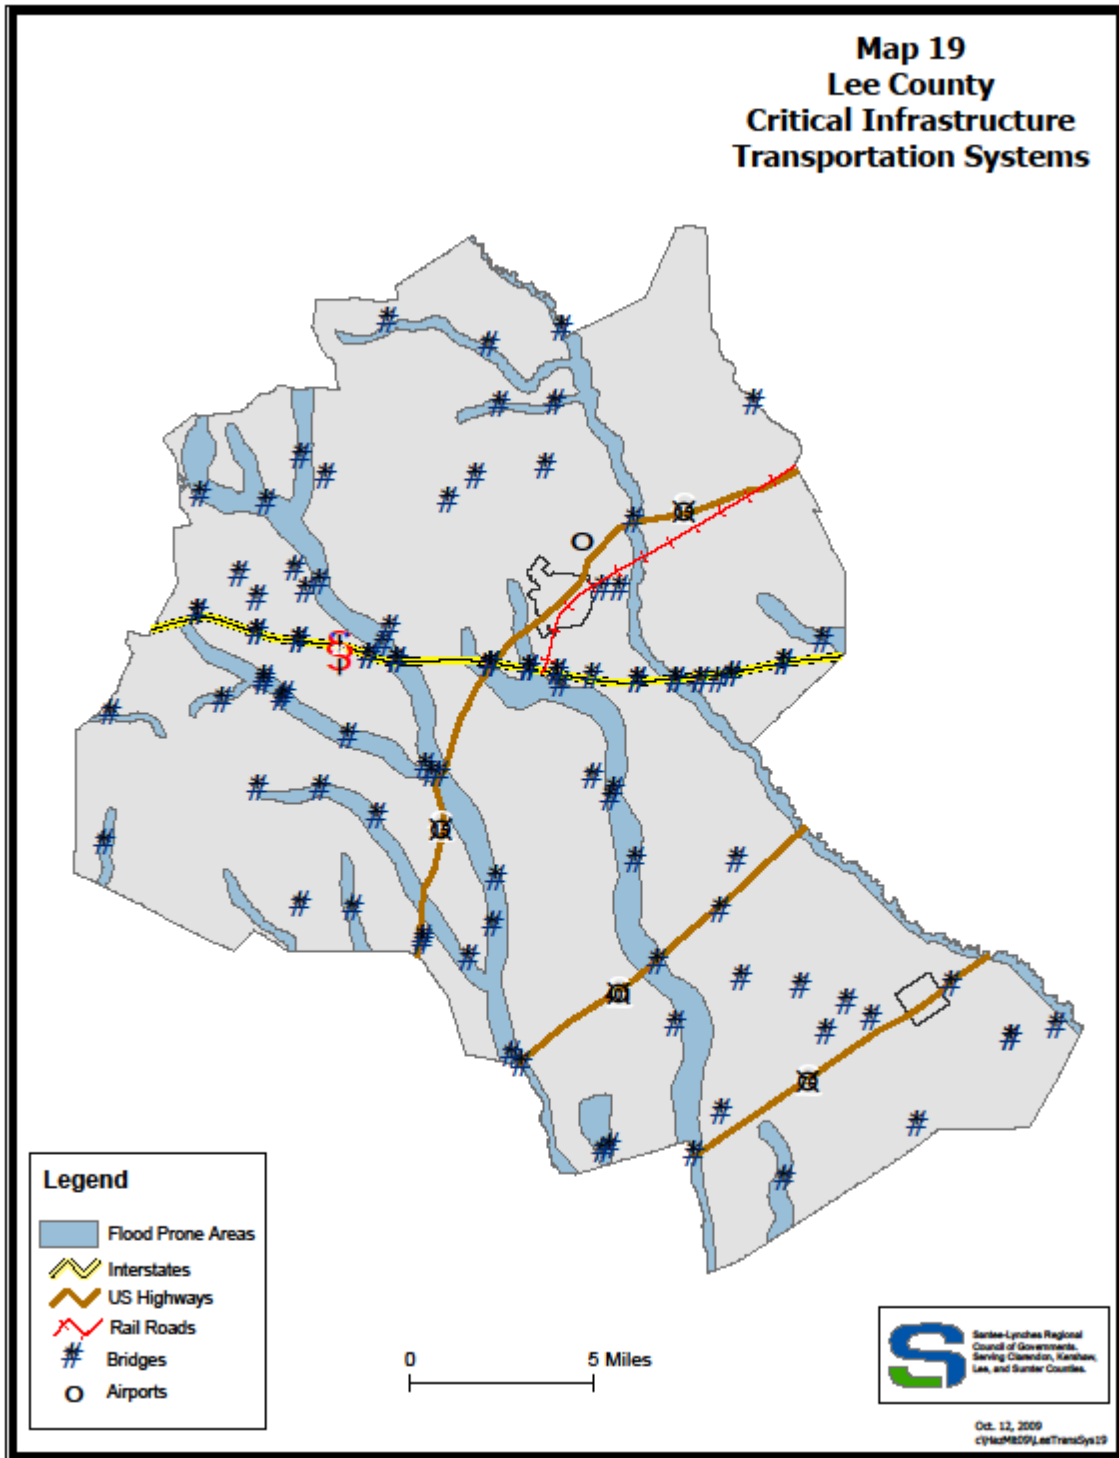

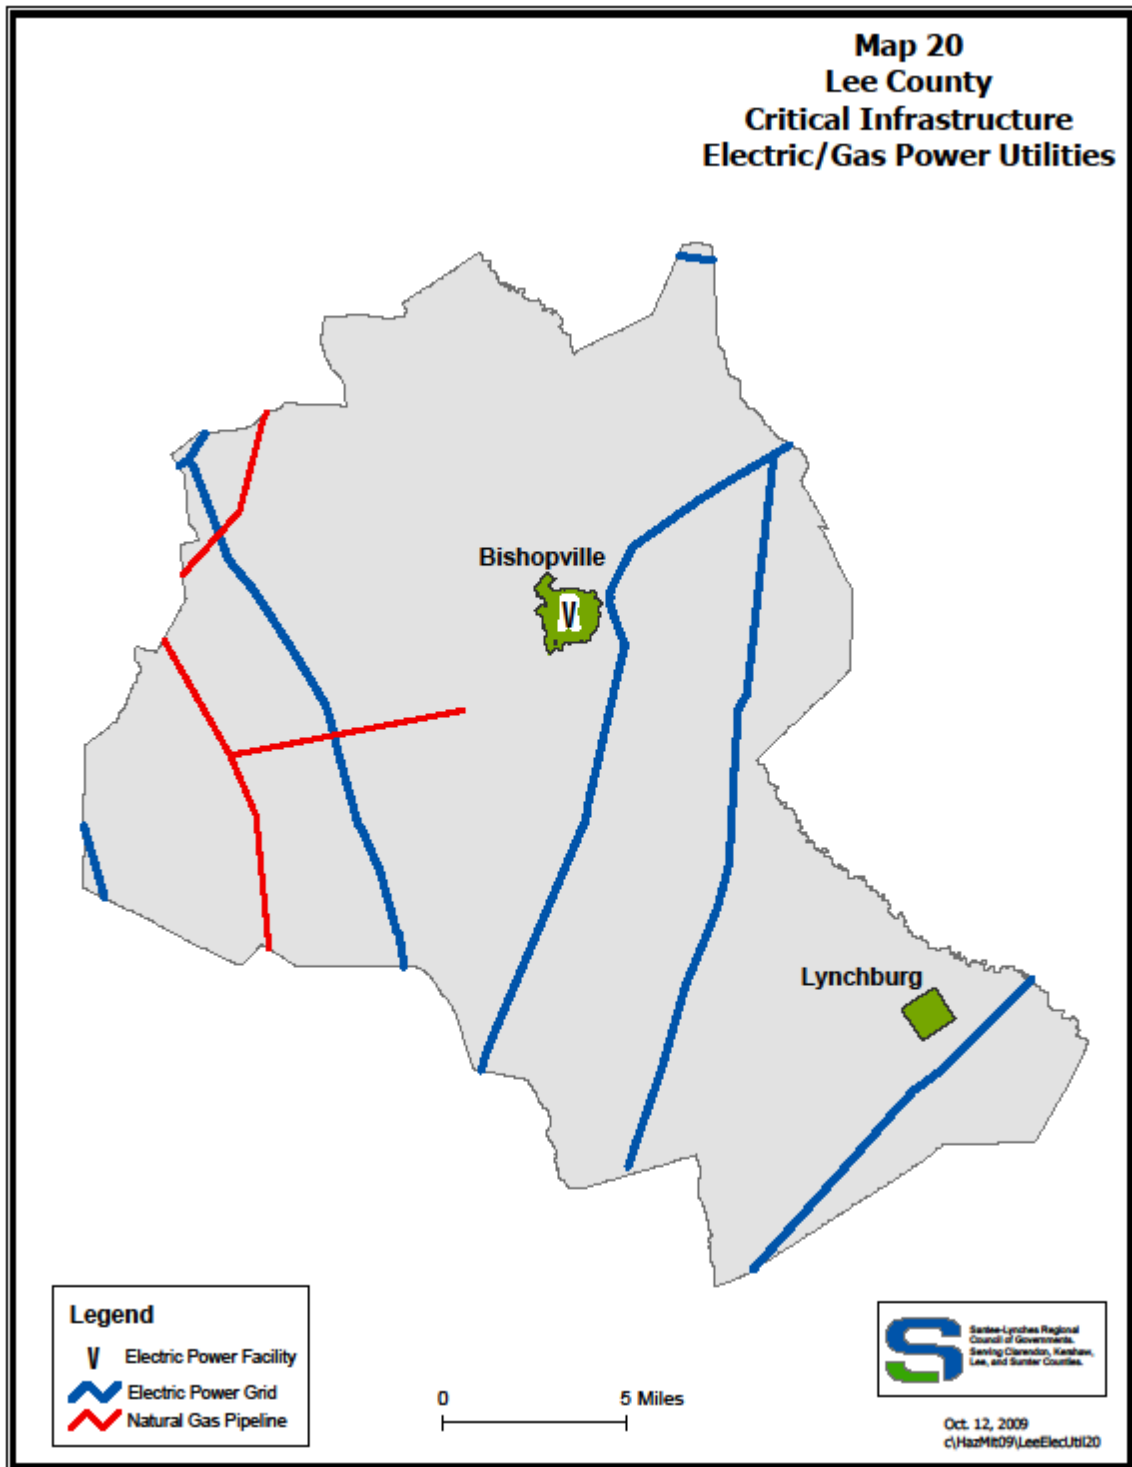

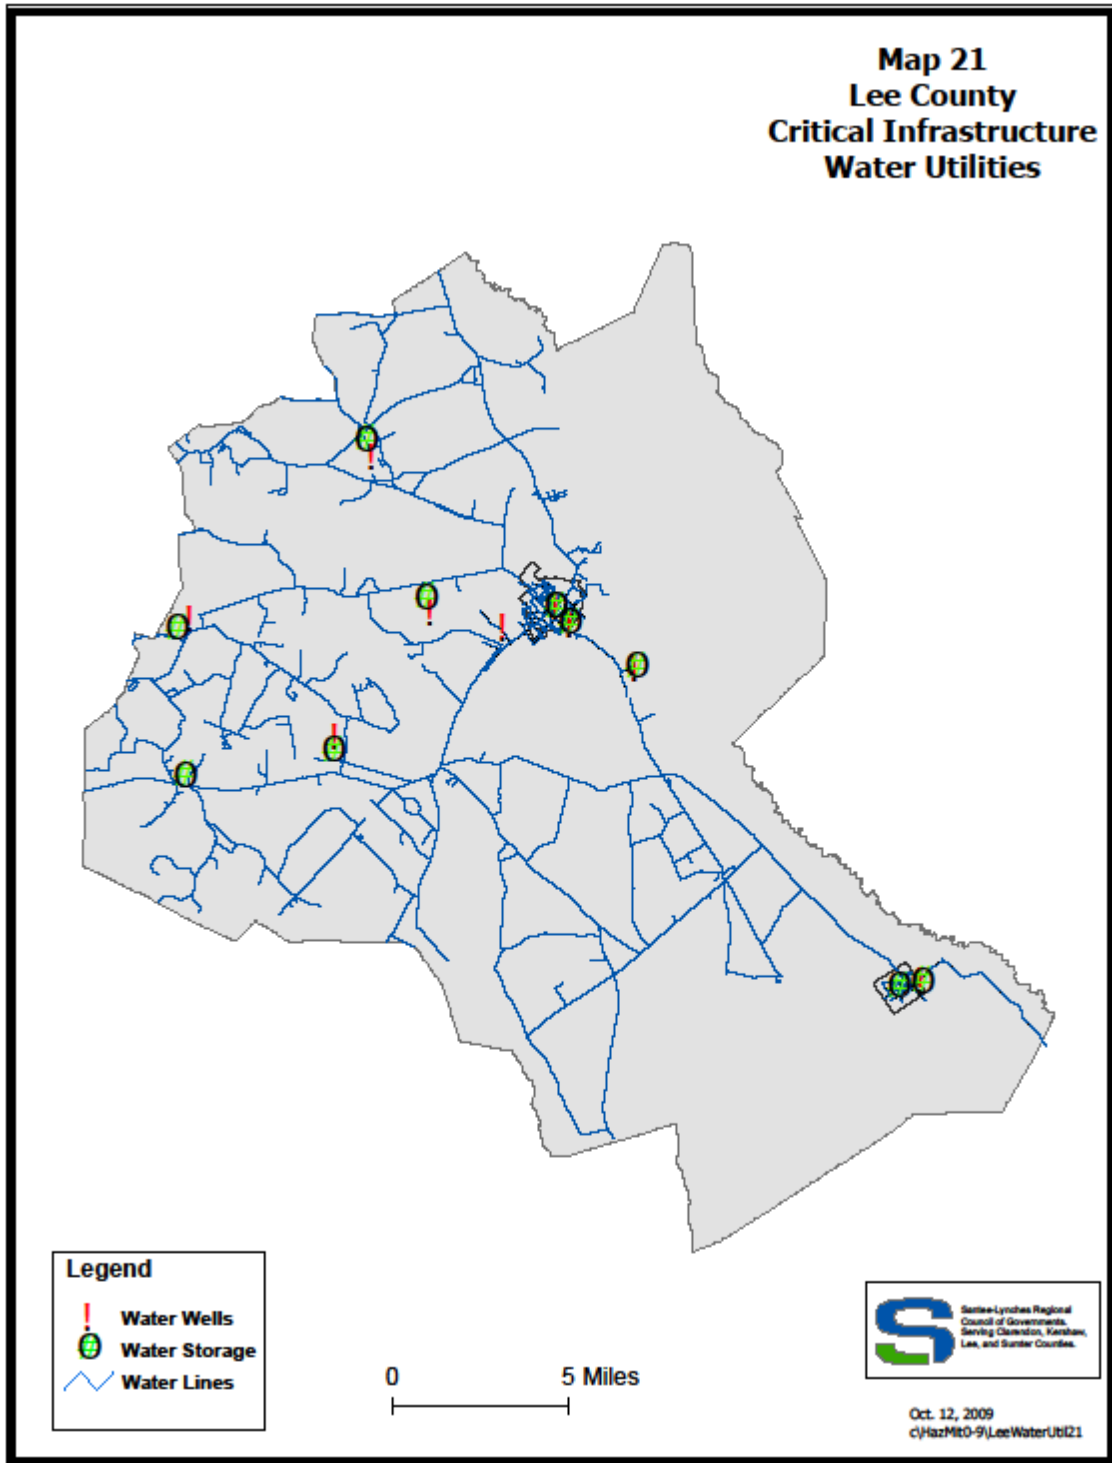

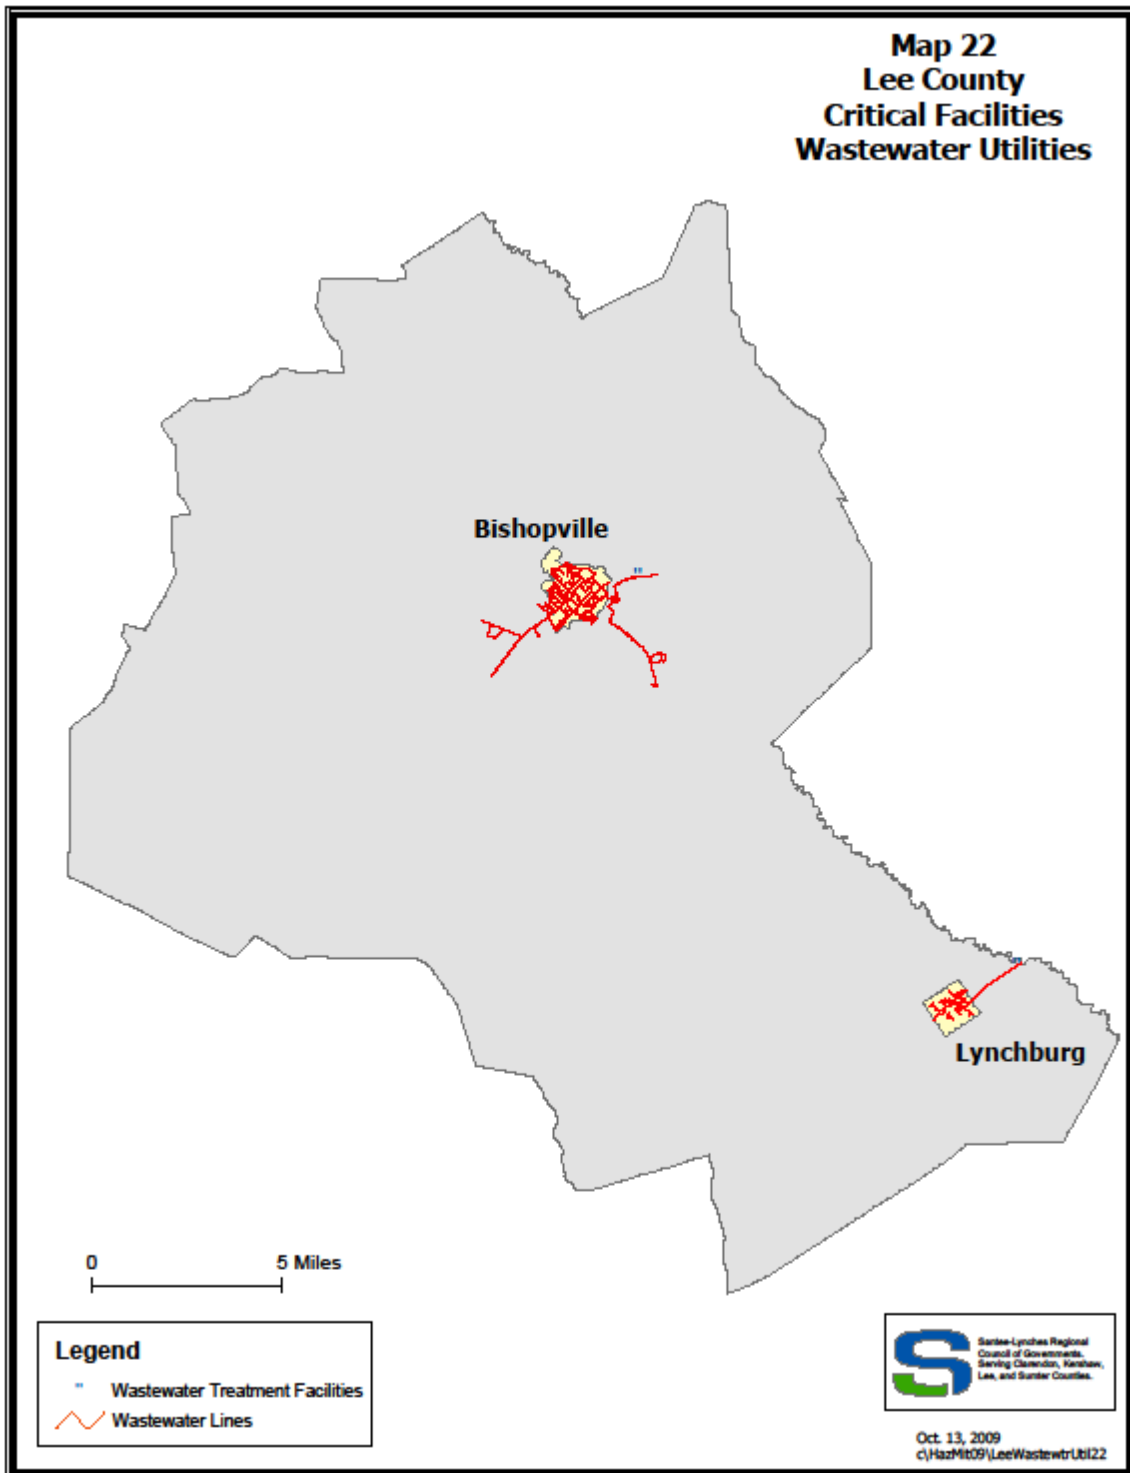

SECTION 8-3 MITIGATION CAPABILITY ASSESSMENT

The capability assessment describes the legal authority vested in local governments to pursue measures to mitigate the impacts of natural hazards. This capability assessment focuses on the evaluation of Lee County's existing programs and policies to determine what vehicles are already in place to support mitigation activities. These policies and programs were identified based on a review of existing plans and ordinances for the county and each of the municipalities

Lee County

Lee County Comprehensive Plan, March 1998

The climatic conditions are addressed but not the natural hazards impacting the County, pages 4-9.

The topographic, soils, and drainage area are also discussed in general, page 4.

Flood prone areas and FEMA requirements are discussed and identified on Map 3, pages 11 and 12.

The Land Use and Growth Trends are discussed with maps showing the long-range land development patterns, page 68, 69.

The Plan specifies "Location Standards for Future Land Use" (i.e. Land designated for industrial and other related activities should be reasonable level ... and should not be swampy or subject to flooding.) page 62.

During the update or revision of the Comprehensive Plan, provisions should be made to address the Natural Hazards and mitigation measures.

Subdivision Regulations, adopted March 1998

Defines Floods and Floodplains, page 3 and gives detailed requirements for the submission of storm drainage plans in Article 9.

Establish as a policy that all plats of subdivisions of property (before they can be recorded in the Court House) must be submitted to and be approved by the Lee County Planning Commission according to the procedures set forth in the ordinance. Page 11

Zoning Ordinance, adopted November 13, 1990, revised August 18, 1998

Established an overlay zoning district, Flood Protective Areas (FW and FP), with the intent to lessen hazards or losses by safety or property in time of flood or which caused excessive increase in flood heights or velocities; by requiring that uses vulnerable to floods be protected against flood hazards at the time of initial construction, page 6-4

The Zoning Ordinance establishes detailed requirements for reviewing all building permits and business licenses to insure that developments are in accordance with county requirements.

Stormwater Regulations

The requirements for storm drainage improvements are included under Article IX *Storm Water Management and Erosion and Sediment Control*, of the Lee County Subdivision Regulations, pages 52-55.

Lee County Emergency Operations Plan (EOP), March 2003

The Emergency Operation Plan provides for policies and procedures for the activation, operations, and staffing of the Lee County Emergency Operation Center during any disaster situation.

EOP establishes emergency operation procedures for planning, coordinating, and managing all phases of disaster relief for Lee County.

The function and operation of the Emergency Operation Center is detailed in the Plan along with specific duties and responsibilities of County and City Departments, and private and public agencies.

The Lee County Local Emergency Planning Committee meets on a regular basis to discuss various emergency or disaster preparedness issues and to plan for training sessions and exercises.

International Building Code, 2002 Edition

Chapter 16 Structural Design, has specific requirements for building design and construction to minimize the impact of natural hazards (snow loads, wind loads, flood loads and earthquake loads)

Appendix G of the Building Code has specific requirements for flood resistant construction.

City of Bishopville**City of Bishopville Comprehensive Plan, adopted July 15, 1997**

The plan discusses the population trends, distribution, and projections along with the social characteristics.

The Natural Resources Element addresses the geographic profile, climatic conditions, waterways, floodways, drainage ways, and wetlands.

The importance of trees in an urban environment serves to protect and enhance property values, control erosion, moderate climate extremes, page 40.

The soils and topographic characteristics of the city are discussed, page 41

Under Community Facilities Element, the city's fire protection facilities, transportation facilities, law enforcement are evaluated.

City of Bishopville Zoning Ordinance, adopted July 15, 1997

The Zoning Ordinance provides for review of all permits for construction or renovation of structures in the city whether it is residential, commercial, or industrial. The Zoning Ordinance governs the location of these structures.

Section 9-5, Stormwater Drainage, requires that subdivision drainage systems be designed and constructed to provide for proper drainage of the surface water and to permit the unimpeded flow of natural water courses, page IX-4

Section 9-6, Erosion and Sediment Control Standards, requires that best management practice (BMP) be employed in any development or land disturbing activity. This section adopts by reference the Erosions and Sediment Control Practices for Developing Areas; promulgated by the SC Land Resource Conservation Commission, page IX-6.

International Building Code, 2003 Edition

The City of Bishopville does not employ a Building Official but contracts with Lee County through an intergovernmental agreement for the enforcement of the provisions of the International Building Code within the city limits.

Chapter 16 Structural Design, has specific requirements for building design and construction to minimize the impact of natural hazards (snow loads, wind loads, flood loads and earthquake loads).

Bishopville Storm Drainage Regulations

Storm drainage requirements are included under the provisions of Section 9-5 of the Bishopville Zoning Ordinance.

Bishopville Flood Damage Prevention Ordinance, adopted April 21, 1980

The overall purpose of this ordinance is to promote the public health, safety, and general welfare and to minimize public and private losses due to flood conditions in specific areas.

The ordinance outlined several specific standards to prevent or minimize damage cause by flood. (1) New construction and substantial improvements shall be constructed with

material and utility equipment resistant to flood damage. (2) New construction and substantial improvements shall be constructed by methods and practices that minimize flood damage.

Administrative Staff/Enforcement Staff

The City of Bishopville has a full time City Administrator, Public Works Director, and Police Chief to assist in the implementation of mitigation measures and emergency response activities. The City has an active Planning Commission and Zoning Board of Appeals.

Town of Lynchburg**Town of Lynchburg Comprehensive Plan**

The Town does not have a Comprehensive Plan but has contracted with the Santee-Lynches Regional Council of Governments for the development of such a Plan.

Town of Lynchburg Interim Zoning Ordinance, adopted 2004

The Town has adopted an interim Zoning Ordinance to provide protection of the town and its neighborhoods. The Zoning Ordinance establishes a process, structure, and the authority to review all building permits for conformance with the proposed Land Development Plan, and to regulate the location and placement of buildings and structures.

Sections 4.608, Flood Protective Areas and Section, and Section 4.724, Flood Plains and Flood Ways, specify the requirements for structures and development in the flood plain. The ordinance states that all new construction and substantial improvements to residential and non-residential structures must have the lowest floor elevated to or above the flood plain level.

International Building Code, 2003 Edition

The Town of Lynchburg does not employ a Building Official, however under an intergovernmental agreement, the town contracts with Lee County for enforcement of the International Building Codes within the town limits

Chapter 16, Structural Design, has specific requirements for building design and construction to minimize the impact of natural hazards (snow loads, wind loads, flood loads and earthquake loads).

Administrative and Enforcement Staff

The Town has a part-time Town Clerk/Treasurer to assist in the administration of the affairs of the town, and a full-time Police Chief.

Summary of Capability Assessment – Lee County

The assessment of each local government's policies, programs, and ordinances in Lee County along with their technical/administrative and fiscal abilities indicate that Lynchburg do not have the capability to implement a comprehensive range of mitigation initiatives.

It is noted that Lee County, and the City of Bishopville have the necessary ordinances, policies, and fiscal resources in place along with the administrative staff to implement mitigation strategies, goals, objectives, and an action plan.

Recommendations:

It is the recommendation of the Hazard Mitigation Steering Committee that formal and informal Intergovernmental Agreements and Memorandums of Understanding between the Town Council of Lynchburg be worked out to permit Lee County to implement emergency response activities (preparedness, response, and mitigation) within their town limits.

The county will continue to utilize and make available to the Town of Lynchburg the County's Building and Planning Department for the enforcement of building and construction codes, the Sheriff's Department for law enforcement by supplementing and complementing local police efforts; and the county's Emergency Operation Center will be utilized for emergency response and mitigation activities. The County's Public Education and Awareness Program will be countywide in its scope and focus. In addition, any application for federal funds from FEMA, HUD, and other programs will be applied for and utilized on a countywide basis and on behalf of the Town of Lynchburg.

The mitigation efforts or measures that Lee County will pursue include the following: prevention, property protection, public education and awareness, natural; resources protection, emergency services and structural projects as outlined in the Lee County Action Plan in Section 8-5

Section 8-4

Mitigation Strategy - Goals, Objectives, and Action Plan

This section puts forth a summation of the ideas and concepts, brought about by mitigation planning, through a list of goals and corresponding objectives for Lee County and its municipalities. Each goal is listed and then accompanied by courses of action, which are bulleted items that follow. Finally, the section provides a table listing specific actions for the stated goals, along with priority of the project, and the responsible party and timeframe for implementation.

Goals are general guidelines that explain what is the desired outcome of the natural disaster mitigation planning process. As such, they are to be considered broad policy statements representing long-term results and also to address problems and situations identified through vulnerability and capability assessments.

Objectives, on the other hand, describe strategies or implementation steps to attain the identified goals. Objectives are more specific statements than goals, and the steps that they describe are usually measurable with defined completion times.

Finally, actions provide more detailed descriptions of specific work tasks to help a county or municipality achieve the goals and objectives. These, in turn, can be further elaborated as specific projects envisioned by a local government that addresses specific needs or desired outcomes.

Priority of Projects

Based on the recommendations of the Hazard Mitigation Steering Committee, the following implementation schedule has been developed. Projects have been listed with the ranking assigned by the Steering Committee (H=High, M=Medium, L=Low). Feasibility to implement the project is based on the results of the capability assessment.

- High priority project with high feasibility
- High priority projects with medium feasibility
- Medium priority projects with high feasibility
- Medium priority projects with medium feasibility
- Medium priority projects with low feasibility
- Low priority projects

The Hazard Mitigation Steering Committee ranked projects based on a cost-benefit review that showed which projects were most needed, which of these projects was the most likely to be accomplished, and which would most effectively address mitigation needs. In addition to reviewing potential monetary costs, the team considered the social impact of each potential project, the technical capabilities of the local government to carry through the project, impact on the environment, ability of the local government to maintain the project, and any political or legal effects of the decision. This cost-benefit review was the basis for each of the project feasibility rankings.

Funding

A list of the potential funding sources, please refer to Appendix B.

Responsible Party

Effective implementation of the actions is vital to the success of the Hazard Mitigation Plan. The following tables for the counties and incorporated city's and town's lay out the

implementation strategy, i.e. and who is the responsible party for implementation of the strategy. The Hazard Mitigation Steering Committee has worked out this implementation strategy for each implementation action. The abbreviation or name of the following implementation agencies will be used in the action tables:

COG	Council of Governments
CC	County Council and City Council
DHEC	Department of Health and Environmental Control
FEMA	Federal Emergency Management Agency
DPA	County Disaster Preparedness Agency
EMD	Emergency Management Director
ARC	American Red Cross
DSS	SC Department of Social Services
PW	Public Works Department
UD	Utilities Department
PUP	Private Utility Provider
CiA	City Administrator
CoA	County Administrator
SBC	State Building Codes
SCDNR	South Carolina Department of Natural Resources
SCEMD	South Carolina Emergency Management Division

Timeframe

The recommended timeframe for the implementation of the specific action item is as follows:

On-going – Daily/Monthly
 Immediate – within one (1) year or less

Short-Term
 1-2 years ---2010 - 2012
 2-4 years ---2012 - 2014

Long-Term
 6-8 Years---2016 - 2018
 8-10 Years---2018 - 2020

Mitigation Actions and Goals for Lynchburg

The assessment of each local government's policies, programs, and ordinances in Lee County along with their technical/administrative and fiscal abilities indicate that Lynchburg does not have the capability to implement a comprehensive range of mitigation initiatives. Lee County has historically assisted these jurisdictions in the implementation of programs, policies and activities outside the scope of jurisdictional capabilities. Given these limitations Lynchburg requested that Lee County assist them in the implementation of mitigation activities. Action items for those jurisdictions are items for those jurisdictions are included with the action items for Lee County. Action items for Lynchburg are indicated by T or P in the Lee County action item listing. Lee County Goals #2 and #10 apply to Lynchburg.

4.1 Lee County Mitigation Strategy

Goal #1 Ensure the protection of critical facilities in the county.

Objectives

- Identify needed repairs and improvements to critical facility structures and equipment.
- Identify critical facilities that are at risk of being damaged or incapacitated due to a natural disaster.

Goal #2 Increase public education and awareness of natural hazards.

Objectives

- Provide public education to increase awareness of hazards and publicize the effectiveness of mitigation by incorporating/developing web sites, pamphlets, radio, television, and print media.
- All interested individuals will be encouraged to participate in hazard mitigation planning and training activities.
- Educate the public about emergency shelters and evacuation procedures.

Goal #3 Ensure that the availability and operation of the county's infrastructure will not be significantly disrupted by a natural disaster.

Objectives

- Water, sewer, roads, power, and natural gas infrastructure must be assessed for their vulnerability, and be inspected for their ability to maintain functionality during the occurrence of a natural disaster.

Goal #4 Reduce the potential impact of natural disasters on new and existing development

Objectives

- Through comprehensive plans, building codes, or zoning ordinances and similar local government initiatives should address natural hazard mitigation and strengthen present policies to further protect the county and incorporated municipalities.
- Address identified data limitations regarding lack of detailed information about development build-out potential in high hazard areas.

Goal #5 Ensure that emergency shelters have adequate capacity and resources.

Objectives

- Ensure the availability of back up power through generators.
- Ensure that adequate and sufficient medical supplies and equipment are present.
- Utilize Census Block Group population counts to ensure that shelters are adequate in size to serve surrounding population.

Goal #6 Reduce the impact of wildfires on homes, buildings, critical facilities, and infrastructure.*Objectives*

- Address identified data limitations regarding lack of detailed information about vegetation types and individual structures located within the more rural areas of the County.
- Develop a comprehensive approach to reducing the possibility of damage and loss of function due to the exposure of critical facilities and infrastructure to wildfire.

Goal #7 Reduce the impact of severe winds on houses, buildings, critical facilities, and infrastructure.*Objectives*

- Pursue community oriented grants for structures

Goal #8 Reduce the impact of floods on homes, buildings, critical facilities, and infrastructure.*Objectives*

- Develop a comprehensive approach, through long-range planning, ICC Code revisions and zoning enforcement, to reducing the possibility of damage to structures.
- Protect existing structures and assets that are most vulnerable to the effects of flooding.
- Promote the continuing purchase of flood insurance by property owners in flood hazard areas.
- Address identified data limitations regarding lack of detailed information about individual structures located in the 100 year floodplain; flood probabilities other than the 100 year flood plain; and first floor elevations for priority areas.

Goal #9 Ensure the protection and function of Communications.*Objectives*

- Communication lines should be frequently inspected in order to determine vulnerability to natural hazards.
- Inadequate communication systems supporting emergency service operations will be retrofitted or relocated to withstand the impact of natural disasters.

Goal #10 Facilitate the preparedness of Emergency Response*Objectives*

- Enhance response capacity of the County fire, sheriff, and emergency services personnel to at-risk populations.
- Obtain funding for new equipment and training in order to enhance response times and performance.

Accompanying Actions for Goals**Goal #1: Ensure the protection of critical facilities in the county.**

Priority	Name	Action	Responsible Party	Timeframe
High	Facility Evacuation	Prepare facility audits by evaluating all critical facilities exposure to damage from natural hazards and power losses from downed power lines. Include a review of insurance coverage and identify where more information can be found on the property protection measures recommended by the audit.	EMD	6 Months
Medium	Repair Facilities	Make repairs found listed in the audits in order for the facility to remain operational in case a natural disaster occurs. Items to consider include replacing roofs, installing storm windows and hurricane shutters, improved electrical systems, and ensuring the structures meet the required building codes.	Affected Agencies	Ongoing
Medium	Backup Power for Critical Facilities	All critical facilities should have a proper backup power supply in order to make sure that if power lines are downed, they can remain functional. Therefore, it is essential that critical facilities should be equipped with backup generators.	Affected Agencies	Ongoing

Goal #2: Increase public education and awareness of natural hazards.

Priority	Name	Action	Responsible Party	Timeframe
High	Public Education and Awareness information (L)	Prepare background information, articles and other explanations of hazard mitigation topics and provide them to County, municipal, and private offices for use in presentations, newsletter articles, websites, brochures, and other outreach projects.	EMD	Ongoing
High	Public Education and Awareness (L)	Prepare and disseminate outreach projects based on any prepared material concerning hazard mitigation. These projects should be publicized by the utilization of newsletters, news releases, directed mailings, handouts, websites, radio, and television.	EMD	Ongoing

Goal #3: Ensure that the county's infrastructure will not be significantly disrupted by a natural disaster.

Priority	Name	Action	Responsible Party	Timeframe
High	Inspection of Lines	Utility lines and structures need to be inspected for their ability to withstand a natural hazard.	Provider	Ongoing

Goal #4: Reduce the impact of natural disasters on new and existing developments.

Priority	Name	Action	Responsible Party	Timeframe
High	Update Plans, Codes, and Ordinances	When comprehensive plans, land use plans, zoning, and subdivision ordinances are up for revision, they should include natural disaster mitigation provisions.	Planning & Zoning	Continuous Update
High	Property Protection Measures	Incorporate retrofitting incentives by establishing a program of technical assistance and financial incentives to encourage property protection measures on private commercial property.	Economic Development	Update as needed

Goal # 5: Ensure that emergency shelters have adequate capacity and resources.

Priority	Name	Action	Responsible Party	Timeframe
Medium	Shelter Audit	Perform an audit of shelters to determine which of these structures are better-suited and equipped to serve at-risk populations. In addition, the audit should also determine what equipment is needed to meet these tasks.	ARC	Annually
Medium	Special Needs Population Survey	Use demographic data to determine the location of at-risk populations and develop plans to provide transportation in order to evacuate them to shelters that can provide medical care and meet any special needs that they may have.	EMD	Annually
High	Backup Power	Make sure shelters have an adequate back up power supply by furnishing them with generators.	Provider	Ongoing

Goal # 6: Reduce the impact of wildfires on homes, buildings, critical facilities, and infrastructure.

Priority	Name	Action	Responsible Party	Timeframe
Medium	Inventory Vulnerable Area to Wildfires	Inventory existing data concerning land cover, land use, and future land use and develop GIS databases to determine critical facilities that are vulnerable to wildfire.	COG EMD	2008

Goal # 7: Reduce the impact of severe wind on homes, buildings, critical facilities, and infrastructure.

Priority	Name	Action	Responsible Party	Timeframe
	Vegetation Management	Inspect and manage vegetation that could damage Critical facilities if felled by wind.		

Goal # 8: Reduce the impact of floods on homes, buildings, critical facilities, and infrastructure.

Priority	Name	Action	Responsible Party	Timeframe
Medium	Flood Threat Recognition System	Determine the possibility of a flood threat recognition system that utilizes rain and stream gages, along with a central gage, to monitor and predict the occurrences of floods and flash floods.	NOAA Weather	Long-Term
High	Update Flood Maps	Encourage FEMA to update flood maps.	FEMA	Ongoing
Medium	Back Flow Prevention	Install back-flow prevention valves in sewer pipes.	City Water Department	Ongoing
Low	Storm Water Management	Implement the mandatory storm water utility/tax.	City Government	2008

Goal # 9: Ensure the protection and function of Communications

Priority	Name	Action	Responsible Party	Timeframe
High	Inspection of Lines	An inspection of communication lines in order to determine what needs to be replaced, and to ensure that they are clear from tree limbs and other obstructions.	Provider	Ongoing
Medium	Creation of Mobile Dispatch Unit	Create a mobile dispatch unit to ensure that communications are not lost as a result of a natural disaster.	County EM Director	2009
Medium	Retrofit and Relocate Communication System	Utility and communication systems supporting emergency services operations will be retrofitted or relocated to withstand the impact of a natural disaster.	Provider	Ongoing

Goal #10: Facilitate the preparedness of Emergency Response

Priority	Name	Action	Responsible Party	Timeframe
High	Emergency Response Preparation Evaluation	Conduct a review of emergency response plans and programs to identify where additional activities are needed to respond to natural hazards.	EOC	Ongoing
High	Emergency Response Preparation Equipment	Purchase any necessary equipment that is critical for the response to natural disasters and to ensure that personnel have adequate and up-to date training and the use of specific equipment.	EOC	Ongoing

4.2 City of Bishopville Mitigation Strategy

Goal #1 Ensure the protection of critical facilities in the city.

Objectives

- Identify needed repairs and improvements to critical facility structures and equipment.
- Identify critical facilities that are at risk of being damaged or incapacitated due to a natural disaster.

Goal #2 Increase public education and awareness of natural hazards.

Objectives

- Provide public education to increase awareness of hazards and publicize the effectiveness of mitigation by incorporating/developing web sites, pamphlets, radio, television, and print media.
- All interested individuals will be encouraged to participate in hazard mitigation planning and training activities.
- Educate the public about emergency shelters and evacuation procedures.

Goal #3 Ensure that the availability and operation of the city's infrastructure will not be significantly disrupted by a natural disaster.

Objectives

- Water, sewer, roads, power, and natural gas infrastructure must be assessed for their vulnerability, and be inspected for their ability to maintain functionality during the occurrence of a natural disaster.

Goal #4 Reduce the potential impact of natural disasters on new and existing development

Objectives

- Through comprehensive plans, building codes, or zoning ordinances and similar local government initiatives should address natural hazard mitigation and strengthen present policies to further protect the city and incorporated municipalities.
- Address identified data limitations regarding lack of detailed information about development build-out potential in high hazard areas.

Goal #5 Reduce the impact of wildfires on homes, buildings, critical facilities, and infrastructure.

Objectives

- Address identified data limitations regarding lack of detailed information about vegetation types and individual structures located within the more forested or overgrown areas of the City.
- Develop a comprehensive approach to reducing the possibility of damage and loss of function due to the exposure of critical facilities and infrastructure to wildfire.

Goal #6 Reduce the impact of severe winds on houses, buildings, critical facilities, and infrastructure.*Objectives*

- Pursue community oriented grants for structures

Goal #7 Reduce the impact of floods on homes, buildings, critical facilities, and infrastructure.*Objectives*

- Develop a comprehensive approach, through long-range planning, ICC Code revisions and zoning enforcement, to reducing the possibility of damage to structures.
- Protect existing structures and assets that are most vulnerable to the effects of flooding.
- Promote the continuing purchase of flood insurance by property owners in flood hazard areas.
- Address identified data limitations regarding lack of detailed information about individual structures located in the 100 year floodplain; flood probabilities other than the 100 year flood plain; and first floor elevations for priority areas.

Goal #8 Ensure the protection and function of Communications.*Objectives*

- Communication lines should be frequently inspected in order to determine vulnerability to natural hazards.
- Inadequate communication systems supporting emergency service operations will be retrofitted or relocated to withstand the impact of natural disasters.

Goal #9 Facilitate the preparedness of Emergency Response.*Objectives*

- Enhance response capacity of the City fire, police, and emergency services personnel to at-risk populations.
- Obtain funding for new equipment and training in order to enhance response times and performance.

Accompanying Actions for Goals**Goal #1: Ensure the protection of critical facilities in the city.**

Priority	Name	Action	Responsible Party	Timeframe
High	Facility Evacuation	Prepare facility audits by evaluating all critical facilities exposure to damage from natural hazards and power losses from downed power lines. Include a review of insurance coverage and identify where more information can be found on the property protection measures recommended by the audit.	Department Heads	6 Months
Medium	Repair Facilities	Make repairs found listed in the audits in order for the facility to remain operational in case a natural disaster occurs. Items to consider include replacing roofs, installing storm windows and hurricane shutters, improved electrical systems, and ensuring the structures meet the required building codes.	Affected Departments	Ongoing
High	Backup Power for Critical Facilities	All critical facilities should have a proper backup power supply in order to make sure that if power lines are downed, they can remain functional. Therefore, it is essential that critical facilities should be equipped with backup generators.	Affected Departments	Ongoing

Goal #2: Increase public education and awareness of natural hazards.

Priority	Name	Action	Responsible Party	Timeframe
High	Public Education and Awareness information	Prepare background information, articles and other explanations of hazard mitigation topics and provide them to municipal and private offices for use in presentations, newsletter articles, websites, brochures, and other outreach projects.	Lee County Emergency Operation Center	Ongoing
High	Public Education and Awareness	Prepare and disseminate outreach projects based on any prepared material concerning hazard mitigation. These projects should be publicized by the utilization of newsletters, news releases, directed mailings, handouts, websites, radio, and television.	Lee County Emergency Operation Center	Ongoing

Goal #3: Ensure that the city's infrastructure will not be significantly disrupted by a natural disaster.

Priority	Name	Action	Responsible Party	Timeframe
High	Inspection of Lines	Utility lines and structures need to be inspected for their ability to withstand a natural hazard.	Provider	Ongoing
Medium	Replace or Retrofit Outdated Structures	Any antiquated structures that are deemed vulnerable should be replaced or retrofitted.	Affected Department	Ongoing

Goal #4: Reduce the impact of natural disasters on new and existing developments.

Priority	Name	Action	Responsible Party	Timeframe
High	Update Plans, Codes, and Ordinances	When comprehensive plans, land use plans, zoning, and subdivision ordinances are up for revision, they should include natural disaster mitigation provisions.	Planning & Zoning	Continuous Update
High	Property Protection Measures	Incorporate retrofitting incentives by establishing a program of technical assistance and financial incentives to encourage property protection measures on private commercial property.	Economic Development	Update as needed
Medium	Flood Control Projects	Implement flood control projects for areas of the city by cleaning drainage ditches that are prone to failure.	Street/Public Works Department	2008

Goal #5: Reduce the impact of wildfires on homes, buildings, critical facilities, and infrastructure.

Priority	Name	Action	Responsible Party	Timeframe
Medium	Inventory Vulnerable Area to Wildfires	Inventory existing data concerning land cover, land use, and future land use and develop GIS databases to determine areas that are vulnerable to wildfire.	COG Lee County Emergency Operation Center	2007

Goal #6: Reduce the impact of severe wind on homes, buildings, critical facilities, and infrastructure.

Priority	Name	Action	Responsible Party	Timeframe
Medium	Vegetation Management	Inspect and manage vegetation that could damage Critical facilities if felled by wind.	Fire Department	2007

Goal #7: Reduce the impact of floods on homes, buildings, critical facilities, and infrastructure.

Priority	Name	Action	Responsible Party	Timeframe
Medium	Drainage Ditch Maintenance	Implement a formal and regular drainage ditch and canal system maintenance program for storm water management.	Street Department	Ongoing
Medium	Flood Threat Recognition System	Determine the possibility of a flood threat recognition system that utilizes rain and stream gages, along with a central gage, to monitor and predict the occurrences of floods and flash floods.	NOAA Weather	Long Term
High	Update Flood Maps	Encourage FEMA to update flood maps.	FEMA	Ongoing
Medium	Back Flow Prevention	Install back-flow prevention valves in sewer pipes, if recommended.	Water Department	Ongoing

Goal #8: Ensure the protection and function of Communications.

Priority	Name	Action	Responsible Party	Timeframe
High	Inspection of Lines	An inspection of communication lines in order to determine what needs to be replaced, and to ensure that they are clear from tree limbs and other obstructions.	Provider	Ongoing
Medium	Creation of Mobile Dispatch Unit	Create a mobile dispatch unit to ensure that communications are not lost as a result of a natural disaster.	Lee County Emergency Operation Center	2009
Medium	Retrofit and Relocate Communication System	Utility and communication systems supporting emergency services operations will be retrofitted or relocated to withstand the impact of a natural disaster.	Provider	Ongoing

Goal #9: Facilitate the preparedness of Emergency Response.

Priority	Name	Action	Responsible Party	Timeframe
High	Emergency Response Preparation Evaluation	Conduct a review of emergency response plans and programs to identify where additional activities are needed to respond to natural hazards.	Lee County Emergency Operation Center	Ongoing
High	Emergency Response Preparation Equipment	Purchase any necessary equipment that is critical for the response to natural disasters and to ensure that personnel have adequate and up-to-date training and the use of specific equipment.	Lee County Emergency Operation Center	Ongoing

4.3 Town of Lynchburg Mitigation Strategy**Goal #2 Increase public education and awareness of natural hazards.***Objectives*

- Provide public education to increase awareness of hazards and publicize the effectiveness of mitigation by incorporating/developing web sites, pamphlets, radio, television, and print media.
- All interested individuals will be encouraged to participate in hazard mitigation planning and training activities.
- Educate the public about emergency shelters and evacuation procedures.

Goal #10 Facilitate the preparedness of Emergency Response*Objectives*

- Enhance response capacity of the Town fire, police, and emergency services personnel to at-risk populations.
- Obtain funding for new equipment and training in order to enhance response times and performance.

Accompanying Actions for Goals**Goal #2: Increase public education and awareness of natural hazards.**

Priority	Name	Action	Responsible Party	Timeframe
High	Public Education and Awareness information	Prepare background information, articles and other explanations of hazard mitigation topics and provide them to municipal and private offices for use in presentations, newsletter articles, websites, brochures, and other outreach projects.	Emergency Management Director	Ongoing
High	Public Education and Awareness	Prepare and disseminate outreach projects based on any prepared material concerning hazard mitigation. These projects should be publicized by the utilization of newsletters, news releases, directed mailings, handouts, websites, radio, and television.	Emergency Management Director	Ongoing

Goal #10: Facilitate the preparedness of Emergency Response

Priority	Name	Action	Responsible Party	Timeframe
High	Emergency Response Preparation Evaluation	Conduct a review of emergency response plans and programs to identify where additional activities are needed to respond to natural hazards.	Emergency Management Director	Ongoing
High	Emergency Response Preparation Equipment	Purchase any necessary equipment that is critical for the response to natural disasters and to ensure that personnel have adequate and up-to-date training and the use of specific equipment.	Emergency Management Director	Ongoing

Lee County Critical Facilities

Type	Name	Address	Owner	Lat	Long
Fire Station	Lynchburg Station	SC 341	Lee County	34.05486	-80.06622
Fire Station	Turkey Creek Station	Hubb Kelley Rd	Lee County	34.31167	-80.2909
Fire Station	Ashwood Station	Sumter Hwy	Lee County	34.1073	-80.31205
Fire Station	Red Hill Station	McCaskill Rd	Lee County	34.18868	-80.40666
Fire Station	Headquarters	Hospital Square	Lee County & City of Bishopville	34.22655	-80.25967
Fire Station	Black River Station	Darlington Hwy	Lee County	34.07574	-80.20134
Fire Station	Alcott Station	Hartsville Rd	Lee County	34.2519	-80.18501
Fire Station	Cedar Creek Station	Camden Hwy	Lee County	34.22531	-80.3714
Emergency Facility	Law Enforcement	Gin Branch Rd	Lee County	34.20137	-80.2865
Emergency Facility	Police Complex	114 E Council St	Lee County & City of Bishopville	34.20137	-80.2867
Sewer Treatment Facility	Bishopville Facility	McGuirt Rd	City of Bishopville	34.224559	-80.219397
Emergency Facility	Lynchburg Police Dept	Main St	Town of Lynchburg	34.06	-80.08
Sewer Treatment Facility	Lynchburg Facility	US 76 E	Town of Lynchburg	34.075405	-80.046943
Communication	WAGS	142 Wags Dr	Private	34.20772	-80.23146
Health Care	Lee Center	108 E Council St	Private	34.217621	-80.248646